



REVISIONS				
REV.	DESCRIPTION	DATE	BY	CHK.
-	INITIAL RELEASE			

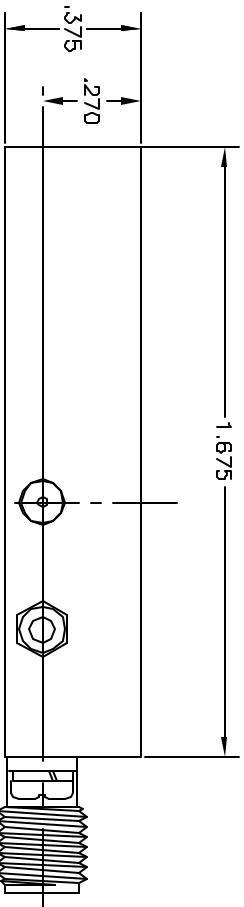

SPECIFICATIONS

FREQUENCY: 2-4 GHz
ENR: 55 dB MIN.
FLATNESS: 3 dB MAX.
IMPEDANCE: 50 OHMS NOMINAL
DC BIAS: +15 ±1.5 VDC @ 200 mA MAX
OP. TEMP: -30 TO +85° C

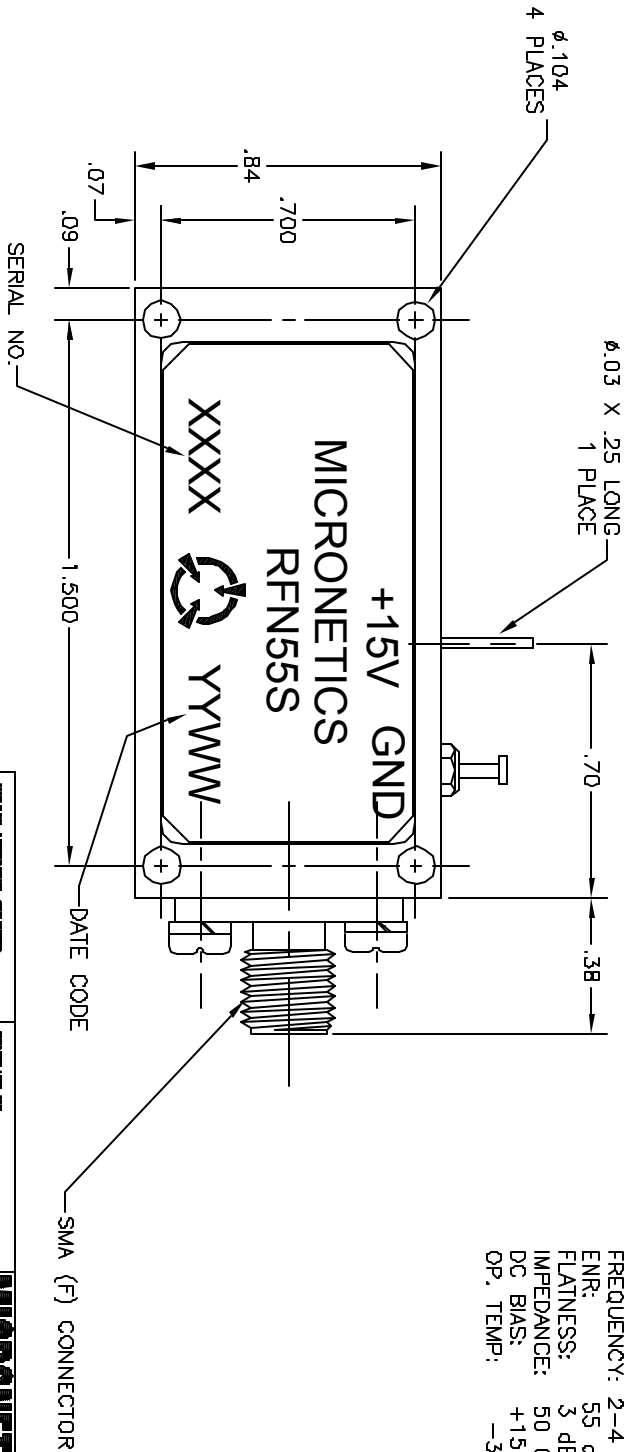

- NOTES:
1. FINISH: MOUNTING SURFACE IS GOLD PLATE
 2. TOLERANCES:
XXX = .01
.XX = .020

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN DECIMALS TOLERANCES ARE FRACTIONS UNLESS NOTED OTHERWISE		CONTRACT NO.	
		±	DECIMALS UNLESS NOTED OTHERWISE	APPROVALS	DATE
	MATERIAL	SEE NOTE		DESIGNED BY	DATE
		FINISH		CHECKED BY	DATE
	NOTE LAST	TIED IN		REVIEWED BY	DATE
APPLICATION		DO NOT SCALE DRAWING			