

EEV

MG5353

1.5 kW X-Band Magnetron**DESCRIPTION**

The MG5353 is a fixed frequency pulse magnetron for use in marine radar systems. The peak power output is typically 1.5 kW at a frequency between 9380 and 9440 MHz. This tube is one of EEV's range of third generation marine magnetrons, known throughout the world for their long life and reliability. Every magnetron is tested to an exacting environmental and electrical specification.

TYPICAL OPERATION

	Min	Typical	Max
Heater voltage	-	8.3	V
Heater current	-	0.6	A
Pulse duration	-	0.9	μs
Pulse repetition rate	-	1000	p.p.s.
Peak anode voltage	-	2.0	kV
Peak anode current	-	2.0	A
Peak output power	1.2	1.6	kW
Mean output power	0.6	0.75	W
R.F. bandwidth	-	2.4	MHz
Sidelobe amplitude	-	-9	dB
Frequency	9380	-	9440 MHz
Missing pulses	-	-	0.01 %

MAXIMUM AND MINIMUM RATINGS

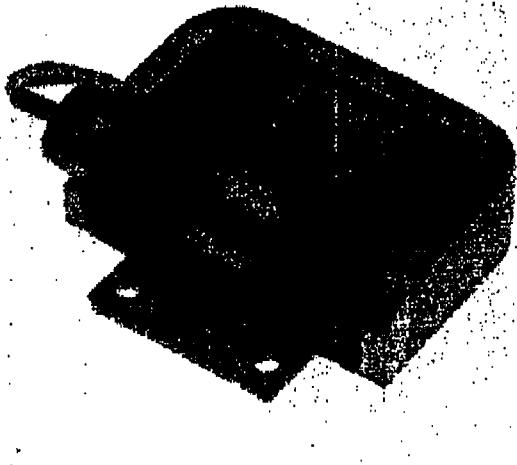
	Min	Max
Heater voltage	-	5.7
Anode voltage	-	1.8
Anode current	-	1.8
Mean anode input power	-	4.4
Duty cycle	-	0.001
Pulse duration	-	0.05
Rate of rise of voltage	-	25
Cathode preheat time	60	-
Peak input power	-	4.4
Load v.s.w.r.	-	1.5:1

MECHANICAL

Overall dimensions	see outline
Net weight	0.5 kg approx
Mounting position	any
Output	no. 16 waveguides

USER NOTES

1. A minimum clearance of 1 inch (25 mm) must be maintained between the magnet and any magnetic materials.
2. This data sheet should be read in conjunction with the magnetron preamble.
3. For further information on the use of the magnetron please contact EEV.

**HEALTH AND SAFETY HAZARDS**

EEV magnetrons are safe to handle and operate, provided that the relevant precautions stated herein are observed. EEV does not accept responsibility for damage or injury resulting from the use of electronic devices it produces. Equipment manufacturers and users must ensure that adequate precautions are taken. Appropriate warning labels and notices must be provided on equipments incorporating EEV devices and in operating manuals.

High Voltage

Equipment must be designed so that personnel cannot come into contact with high voltage circuits. All high voltage circuits and terminals must be enclosed and fail-safe interlock switches must be fitted to disconnect the primary power supply and discharge all high voltage capacitors and other stored charges before allowing access. Interlock switches must not be bypassed to allow operation with access doors open.

R.F. Radiation

Personnel must not be exposed to excessive r.f. radiation. All r.f. connectors must be correctly fitted before operation so that no leakage of r.f. energy can occur and the r.f. output must be coupled efficiently to the load. It is particularly dangerous to look into open waveguide or coaxial feeders while the device is energized. Screening of the cathode sidearm of high power magnetrons may be necessary.

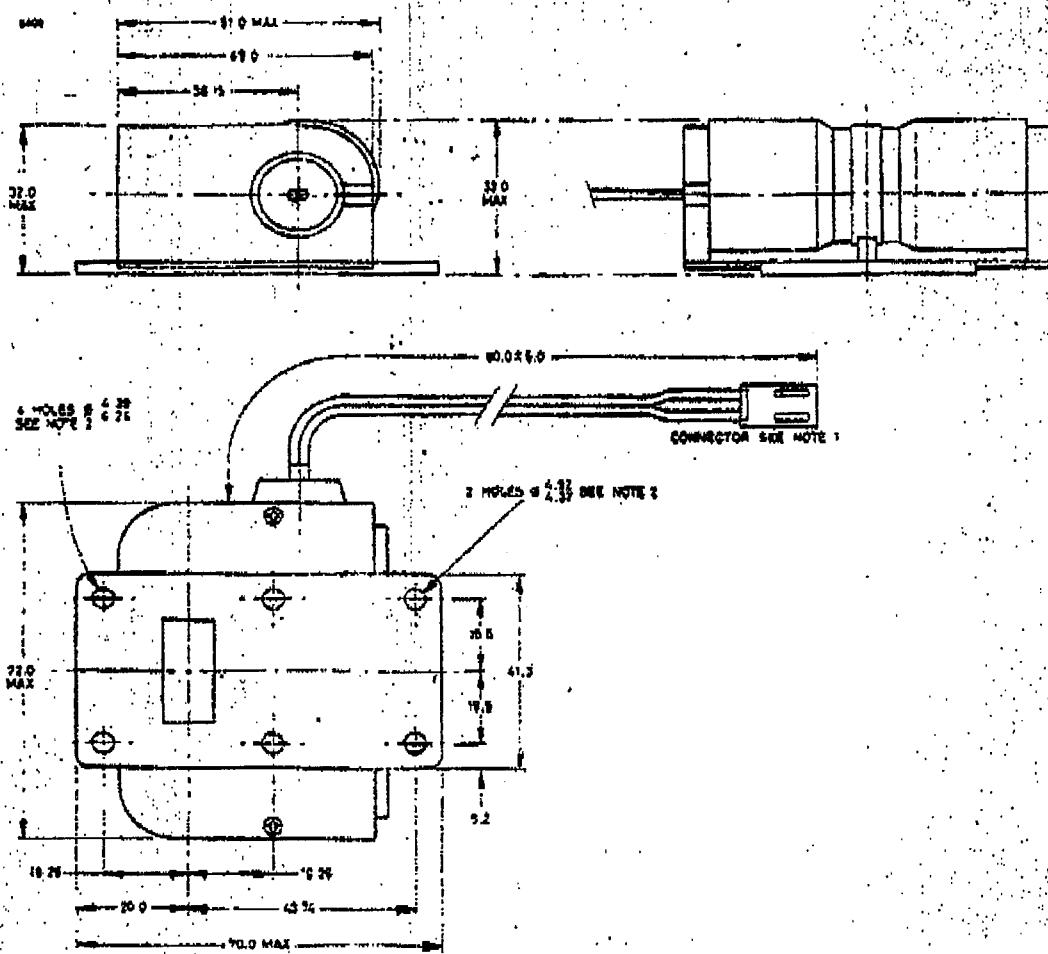
X-Ray Radiation

High voltage magnetrons emit a significant intensity of X-rays not only from the cathode sidearm but also from the output waveguide. These rays can constitute a health hazard unless adequate shielding for X-ray radiation is provided. This is a characteristic of all magnetrons and the X-rays emitted correspond to a voltage much higher than that of the anode.

EEV

Waterhouse Lane, Chelmsford, Essex CM1 2GU, England Telephone: (0248) 492483 Telex: 89102 Fax: (0248) 492492

Subsidiary of The General Electric Company, p.l.c. of England

OUTLINE (All dimensions in millimetres; dimensions without limits are nominal)

1. Heater cathode connector JST VHR-2N or equivalent.
 - 1 - Heater Green
 - 2 - Heater, cathode Yellow
2. Positional tolerance 0.4 mm (0.016 inch) dia.

Whilst EEV has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. EEV accepts no liability beyond that set out in its standard conditions of sale in respect of infringement of third party patents and no claim for the use of tubes or other devices in accordance with information contained herein.

LIT-EEV-00000000000000000000000000000000

RECEIVED FROM 453725

11.11.1992 11:25

** TOTAL PAGE .003 **

END