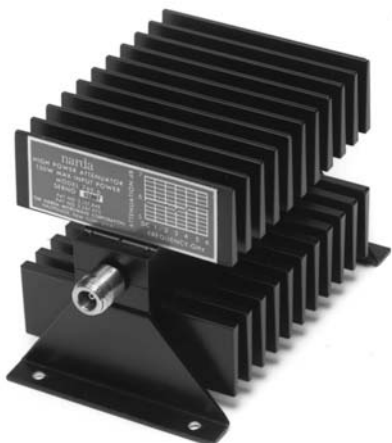


**DC-6 GHz****Type N High Power
Bi-Directional Fixed
Coaxial Attenuators**

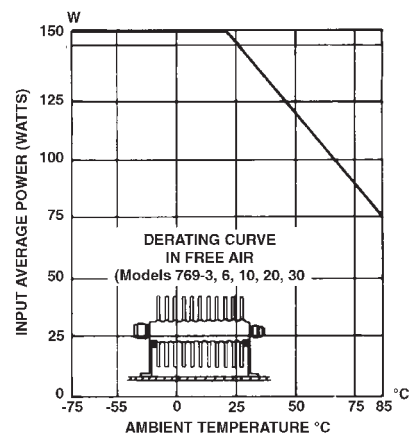
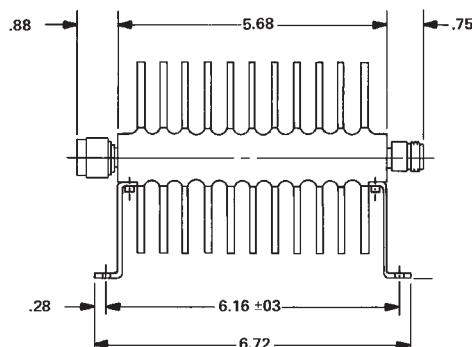
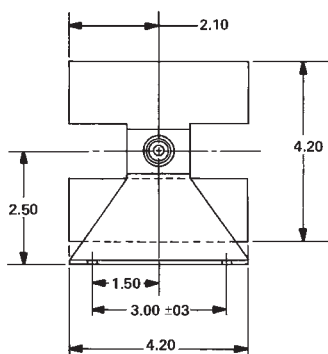
- High Power (150 watts average)
- 3, 6, 10, 20, and 30 dB Versions

Specifications

FREQUENCY RANGE GHz	MODEL	ATTENUATION dB NOMINAL	ATTENUATION dB DEVIATION		POWER INPUT		VSWR (max) D-6	WEIGHT (max)	
			DC-2.0	2-6	AVG. W (max)	PEAK kW (max)		lbs	kg
DC-6	769	3	±0.4	±.75	150	3	1.35	3.3	1.5
		6	±0.4	±.75	150	3	1.35	3.3	1.5
		10	±0.4	±.75	150	3	1.35	3.3	1.5
		20	±0.5	±1.0	150	3	1.35	3.3	1.5
		30	±0.5	±1.0	150	3	1.35	3.3	1.5

NOTE: Temperature Coefficient: 0.0006 dB/dB/°C; Power Coefficient: 0.0005 dB/dB/watt

ORDERING INFORMATION: Specify model number and add dash number suffix for attenuation in dB.
For example: 769-3

Outline Drawings

All dimensions are max. unless otherwise specified.

