



Outline Drawings - Multi-Octave 4-Way Power Dividers

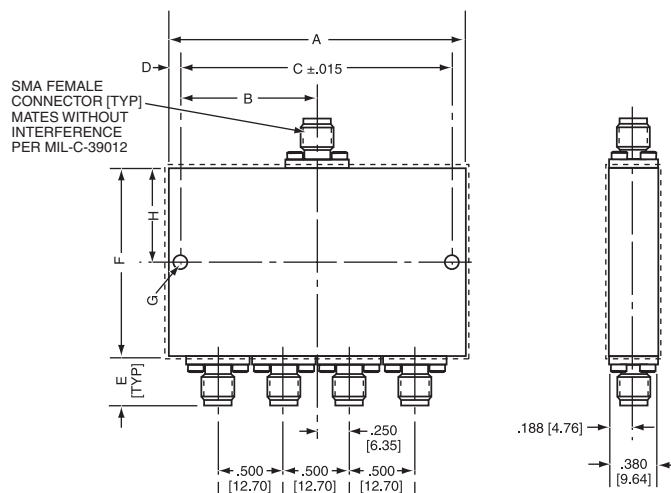

MODEL	A	B	C	D	E	F	G (Thru 2 Holes)	H
4321C-4	2.343 (59.51)	1.171 (29.74)	2.153 (54.68)	.095 (2.41)	.375 (9.52)	2.11 (53.62)	.104 ^{+0.004} _{-.002} Dia.	1.055 (26.79)
4324-4	1.940 (49.27)	.970 (24.63)	1.688 (42.87)	.126 (3.20)		3.448 (87.57)	.146 Dia.	1.724 (43.78)
4325-4	2.343 (59.51)	1.171 (29.74)	2.153 (54.68)	.095 (2.41)	.406 (10.31)	2.11 (53.62)	.104 ^{+0.004} _{-.002} Dia.	1.055 (26.79)
4326B-4	1.940 (49.27)	.970 (24.63)	1.688 (42.87)	.126 (3.20)	.375 (9.52)	1.418 (36.01)	.146 Dia.	.709 (18.00)
4456-4						3.448 (87.57)		1.724 (43.78)

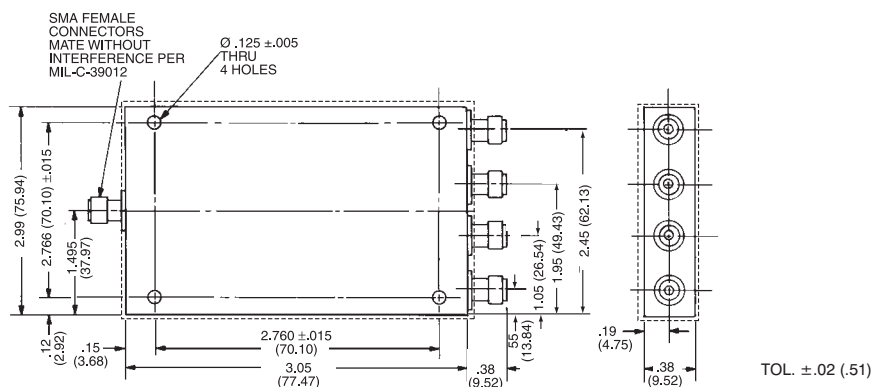

MODEL 4322-4

Allow .020 for sealant buildup per surface.

Dimensions in parentheses are in millimeters and for reference only.

