

M1221

High Band

Microwave Power Module

Features

- **60-100 Watts Output Power**
- **20-35% Efficiency**
- **<70 Cubic Inches**



Performance Characteristics

Frequency.....	6.0 to 18.0 GHz
RF Output Power	60-100 Watts (min)
RF Input Power.....	0 $\pm$ 1 dBm
Small Signal Gain.....	50 dB (min)
PRF	50 kHz (max)
Harmonics @ 6 GHz	-3 dBc (max)
@ 8 GHz.....	-5 dBc (max)
@10 GHz.....	-11 dBc (max)
AM/PM Conversion	6°/dB (max)
Spurious	-50 dBc (max)
Spectral Purity.....	-45 dBc (max)

Environment


Temperature	-54 to +85°C
Underneath TWT Collector	+95°C max
Cooling	Conduction
Altitude	70,000 feet
Humidity.....	Up to 100%, with condensation
Shock	20 g, 11 msec
Acceleration	10 g's
Vibration	0.04 g ² /Hz from 80 to 350 Hz
.....	-3dB/octave 20 to 80 Hz
.....	-3dB/octave 350 to 2000 Hz

Mechanical Description

Dimensions.....	7.8" x 7.5" x 1.25"
Weight	5 lbs (max)
RF Input Connector.....	SMA
RF Output Connector	TNC
DC Input	15 pin D-Sub

The M1221 represents the state of the art in low noise, compact, high efficiency, wideband RF amplifiers for airborne, shipboard, and ground military applications. This MPM contains a TWT, an SSA and power supply within a single conduction-cooled package.

DSM12210405

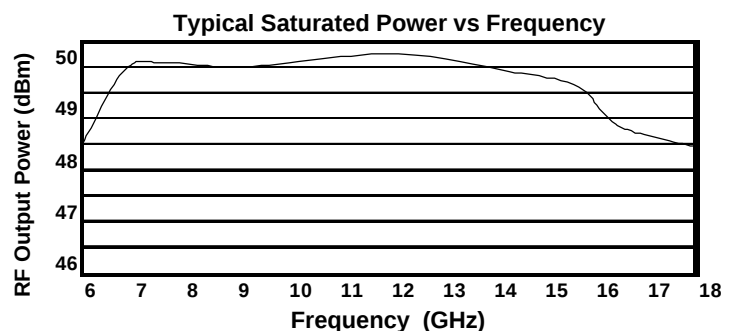

Interface

Prime Power, operating	+28 VDC
.....	Per MIL-STD-704E
.....	400 Watts (max)
Prime Power, standby.....	50 Watts (max)
Controls	Standby/Operate, Radiate
Digital Indicators.....	Warm-up Complete Indicator
.....	Operate Indicator
.....	Fault Indicator
.....	High Voltage Indicator
Analog Monitor	Helix Current

Cleared by DoD/DFOISR for public
release under 05-S-2041 8/2/05