


Advanced Laser Systems Technology

TE-50

EYESAFE LASER RANGEFINDER

PRODUCT DESCRIPTION

The TE-50 is a low profile, eyesafe, long-range laser rangefinder for small targets such as Unmanned Aerial Vehicles (UAVs) and Jet Skis. Small targets require a tighter beam divergence and more sensitive receivers to achieve longer range performance. The highly sensitive TE-cooled APD detects targets with a minimum of reflected energy making the TE-50 the perfect high-performance LRF for limited spaces.

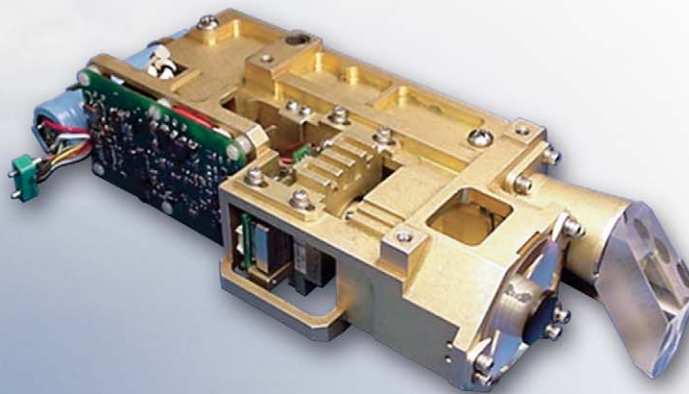

FEATURES

- 30 km ranging capability
- Compact size
- TE-cooled Avalanche Photodiode Detector
- 0.3 mrad beam divergence standard
- Optional 1 Hz rep rate
- ANSI Z136.1-2000 and EN 60825 Class 1 Eyesafe
- Kinematic mounting interface for reliable boresight retention
- Single connector interface for power and communication



Advanced Laser Systems Technology

TE-50

EYESAFE LASER RANGEFINDER

SPECIFICATIONS

Laser Type	Erbium:glass
Wavelength	1.54 microns
Pulse Rate	12 ppm (1 Hz optional)
Max/Min Range*	30 km / 50 m
Range Resolution	± 5 m (± 2 m optional)
Receiver Aperture	50 mm
Beam Divergence	0.3 mrad
Detector Type	TE-cooled APD
Communication Interface Options	RS-232, RS-422, RS-485
Module Dimensions	215 mm x 93 mm x 54 mm
Weight	1.08 kg

* Maximum range achievable under ideal atmospheric and target conditions. Actual range is dependent upon atmospheric conditions and upon target size and reflectivity.


OPTIONS FOR TE-50

High Pulse Rate Option (HPR): Continuous operation nominally up to three minutes at one hertz pulse rate. No increase in size or weight.

Non-Volatile Shots Counter Option (SC-1): The number of times the flashlamp has fired is recorded and stored in a non-volatile memory. This number is accessed via the serial interface.

High Range Resolution Option (RC-2): ± 2 m range resolution.

Series Software Option (SW-1): Provides operation via any Windows equipped computer. All controls, installed options, and range data are accessed via the user-friendly control window with mouse selected command buttons and check boxes. One time license fee includes use with unlimited number of units.

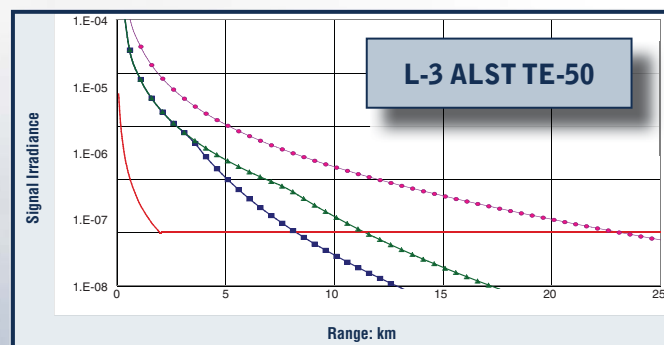

LEGEND

- 1-square meter, 10% R, 23-km. visibility
- TANK, 10% R, 23-km. visibility
- Large Target, 40% R, 30-km. visibility
- Minimum APD detection limit

ABOUT L-3 ALST

L-3 Advanced Laser Systems Technology (L-3 ALST), a wholly owned subsidiary of L-3 Communications Corporation, designs, develops, and manufactures laser designator and rangefinder systems.

L-3 ALST's products are listed under category XII(b) of the United States Munitions List. International Traffic In Arms Regulations (ITAR) requires a valid export license prior to technical or hardware shipments or transmissions of information.



CERTIFICATE NO. 0 4 3 8 3
L-3 ALST is ISO 9001:2000 certified.

Advanced Laser Systems Technology

2500 North Orange Blossom Trail
Orlando, FL 32804

Ph: 407.295.5878

Fax: 407.770.2984

Email: marketing.alst@L-3com.com

www.L-3com.com/alst



communications

Advanced Laser Systems Technology

L-3. Headquartered in New York City, L-3 Communications employs over 64,000 people worldwide and is a prime contractor in aircraft modernization and maintenance, C³ISR (Command, Control, Communications, Intelligence, Surveillance and Reconnaissance) systems and government services. L-3 is also a leading provider of high technology products, subsystems and systems.