Miniature On-Board Display Indicator Model CI 25

FEATURES

- Compact P.C. Board Mounting
- Latching Display
- Low Cost
- For Use in Industrial and Medical Applications
- High Visibility
- Withstands multiple autoclave operations

Designed for P.C. board mounting, the CI 25 indicator is a miniature single coil magnetic latching drum indicator. It features a nonvolatile drum display that provides positive indication of a fault condition and excellent visibility in high ambient light.

The Model CI 25 was designed to provide a low cost solution to monitoring fault conditions or end-of-use indication. This rugged design offers the reliability of much more expensive devices while providing long life in the harshest of environments.

Operation

When the indicator coil is energized, the highly visible drum changes position and latches to the magnetic core. The drum will remain magnetically latched to the core in the position last pulsed. Even if the fault signal is removed, the indicator will "remember" that a fault had occurred.

ELECTRICAL SPECIFICATIONS

Standard Coil Voltages and Resistances Resistant shown at room temperature.

Nominal Voltage (VDC)	3	5	12
Coil Resistance (Ohms)	5.34	14.6	81.3

Dielectric Strength: 100 VRMS

Nom. Operating Pulse Power: .900 watts Operating Pulse Length: 50 milliseconds min. Reset Pulse Length: 50 milliseconds min.

MECHANICAL SPECIFICATIONS

Coil Support: Molded Ultem **Mounting**: Four: .025 square pins.

Weight: 1.2 grams

Display Colors: White, Yellow, Green, or Red

Other colors available upon request. Medical-grade ink used.

Transtech Type: RNT

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature: -40°C to +134°C

100% RH under 30 PSI. **Operational Life**: 500,000 cycles

ORDERING INFORMATION

When ordering, show model number first followed bythe voltage range and then the set color and eset color. If this is a special part, customer's modification number will be added at the end of the ordering number.

Example: A basic model with a 5 volt source, yellow set color and a black reset color would be Cl25-5-Y/BLK.

CI 25 - 5 - Y/BLK - S					
			\		
Basic Model	Coil	Fault or Set	Reset	Customer's Modification	
Number	Voltage	Color	Color	Number if Special	
CI 25	3	BLK Black	BLK Black	S.+ ID No.	
	5	G Green	G Green		
	12	R Red	R Red		
		W White	W White		
		Y Yellow	Y Yellow		





Miniature On-Board Display Indicator Model CI 25



(-) 0.130

NOTE: Polarity shown for set position reverse polarity for reset. Dimensions are for reference.



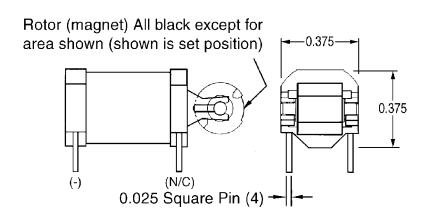

||(+) See Note (+)

0.300(2)

NOTE

Dim. in () are mm. Tolerances:Decimals: ± .010 (0,25) Fractions:± 1/64

(N/C)

-0.250**-**

-0.500 (2)-