


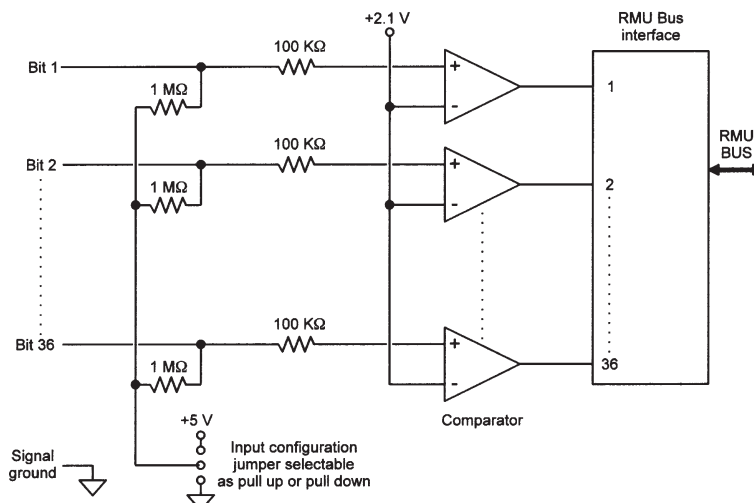

DESCRIPTION

The MSC1000-007 is a fully programmable module designed to interface to inputs from digital transducers, discrete signals, parallel time code generators, or other digital data. It outputs three (3) 12-bit words for a total of 36 channels. This module has the following salient features:

FEATURES

- 36 discrete inputs
- 1 megohm input impedance
- Floating input is a high level
- Input low from 0 V to 1.5 V
- Input high from 2.7 V to 32 V
- Programmable sampling on major frame, minor frame, or on word basis
- All 36 bits latched upon sample command

ELECTRICAL SPECIFICATIONS

Input Characteristics (Per Channel)

- Input impedance: 1 Megohm minimum
- Input "Lo" ranges from 0 to +1.5 V
- Input "Hi" ranges from 2.7 V to 32 V
- Floating input is designated as a logic "Hi"

Sample and Hold

- Programmable to be each time a channel is sampled: on minor frame, or on major frame

Output (Per Channel)

- All 36 bits are latched upon receipt of the sample/hold command
- Output word one contains bits 1 through 12*
- Output word two contains bits 13 through 24*
- Output word three contains bits 25 through 36*

*When system is configured at 12 bits per word.

"This brochure has been released into the public domain in accordance with International Traffic in Arms Regulations (ITAR) 22 CFR 120."

