


Technical Bulletin

Preliminary

PSCC-508-1 8-Channel Programmable Signal Conditioner Airborne Data Acquisition Products

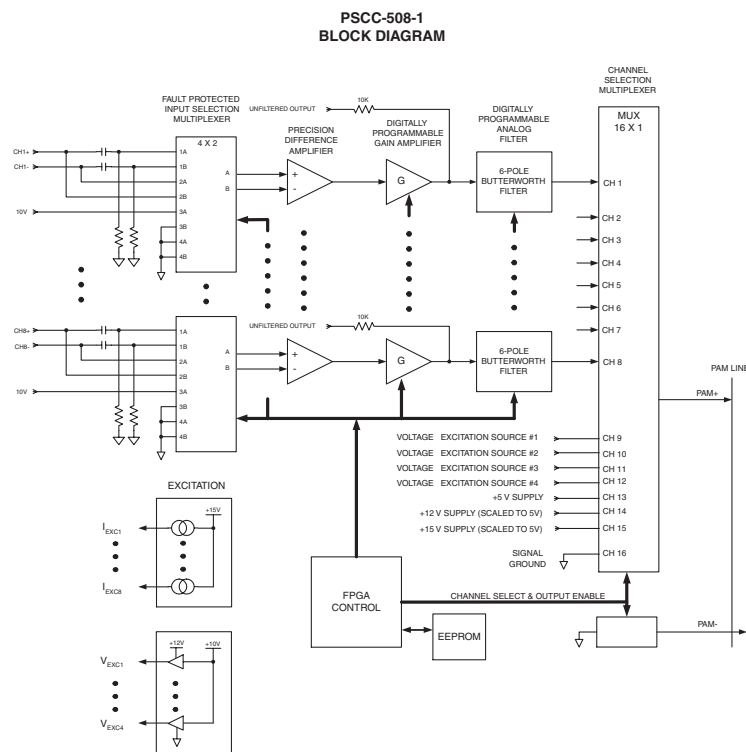

- Programmable Gain
 - 1000 programmable gains from 1 to 1000 (per channel)
- Programmable Offset Trim
 - +/- 50% Per-Channel
 - 1 LSB Resolution
- Digitally Programmable Lowpass Analog Filter
 - 6th Order Butterworth Filter
 - Filter Cutoff from 15 Hz to 5 KHz
 - 1.25 Hz Increments
- Simultaneous Sample (Optional)
- Programmable Input
 - 3 Hz AC Coupled Input
 - DC Coupled Input
- Input Over Voltage Protection
 - -40 Volts to +55 Volts, Power On/Off
- High Input Impedance
 - > 10 Megohms Power On
 - > 1 Megohms Power Off
- 8 Additional Output Channels
 - 4 Voltage Excitation Sources
 - +12V Excitation Supply
 - +5V Supply
 - +15V Supply
 - Signal Ground
- Calibration Provisions
 - Zero Calibration
 - Voltage Substitution
- Compatible with PCU Series I, II, III, IV
- Sensor Excitation
 - 8 Constant Current Sources
 - 4 Constant Voltage Sources

"This brochure has been released into the public domain in accordance with International Traffic in Arms Regulations (ITAR) 22 CFR 120."



L-3 Communications Telemetry-East
 47 Friends Lane, P.O. Box 328 • Newtown, PA 18940-0328
 Telephone: (215) 497-8000 • Fax: (215) 968-3214
 E-Mail: sales/mktg@te.L-3com.com • www.L-3com.com/te