



Safety and Economy – The SRVIVR® Advantage

SRVIVR®
Voice & Data Recorder



The SRVIVR family of Cockpit Voice and Flight Data Recorders (CVFDR) combines the latest in recorder technology with the smallest and lightest, fully EUROCAE-ED-112-compliant recorder on the market today. This combination of flexible technology, weight and space reduction, and survivability offers many benefits for fleet operators at a time when data is critical to aircraft performance and opportunities for cost savings are limited.

Weighing as little as 6 pounds, SRVIVR is available as a CVR, FDR or combi unit and provides up to four channels of audio recording for up to 2 hours. It also records 25 hours of flight data and 2 hours of CNS/ATM data link and includes a rotor speed interface. SRVIVR features dual isolated aircraft power bus inputs enabling battery bus power compatible with RIPS requirements in our CVR. SRVIVR also offers a range of avionics interfaces enabling direct communications with a variety of aircraft systems, including glass cockpits, potentially eliminating the need for a separate Flight Data Acquisition Unit (FDAU).

Understanding the importance of accurate and reliable data, SRVIVR includes survivability to the highest industry standards, ensuring retrieval of precise data to support your Flight Data Management (FDM) and Flight Operational Quality Assurance (FOQA) programs as well as crash investigations. SRVIVR minimizes the risk of inaccurate or corrupted data, regardless of the environment.

The combination of increased functionality, reduced size and weight, and precise data allows you to realize true cost savings over heavier and less-reliable CVFDRs. It also increases the volume available in the aircraft for more productive uses and provides the information you need to improve the operational efficiency of your fleet. With SRVIVR, all of these benefits are possible — now and well into the future.

THE SRVIVR ADVANTAGE

- Lower weight reduces operating costs
- Compact size increases available space
- Flexible design enables aircraft-specific configuration
- Data is secure, even in the event of a fire
- Supports FDM, FOQA and incident investigation
- TSO-C123b, TSO-C124b and TSO-C177 authorized
- Dual isolated power bus inputs
- Compatible with ARINC 757, 757A, 717 and 429 signals
- No mounting brackets required
- Retrieve data quickly via Ethernet download



SRVIVR® VOICE & DATA RECORDER



TECHNICAL SPECIFICATIONS

Temperature Range . Operating: -55° C to +70° C;
Non-operating: -55° C to +85° C

Environments Operational shock 20 g, vibration 13
gRMS, altitude 55,000 feet, humidity
100%

EMI/EMC DO-160F

BIT Power-up, initiated and continuous

Reliability >20,000 operating hours MTBF

Input Power +18 to +32 VDC, DO-160F

Power Consumption . 5 to 8 watts depending on configuration




Cooling Passive convection

Dimensions 3.25" H x 6.55" D x 5.55" W standard
configuration; 3.25" H x 7.2" D x 5.55" W
extended configuration

Weight 6 to 6.75 lbs, depending on configuration

Color Fluorescent orange (FS 28915);
high-reflectivity white stripes optional

OUTLINE DRAWINGS

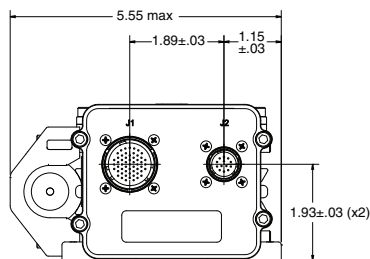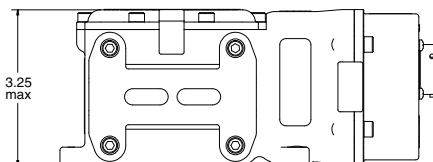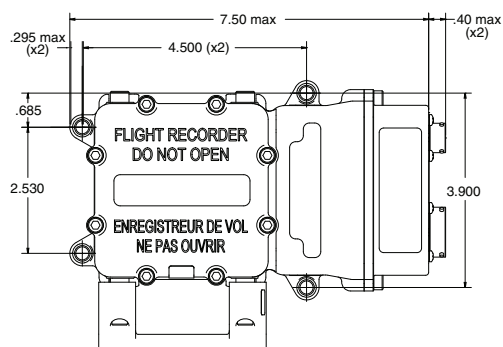

HARDWARE SPECIFICATIONS

Crash Survivability (per ED-112)

Impact Shock . . . 3,400 g, 6.5 ms half sine

Static Crush 5,000 lbs

Penetration 500 lbs dropped from 10 feet with 1/4" diameter impact pin

Fire 50,000 BTU/sq ft/hr for 60 minutes at 1,100°C; 10 hours at 260°C

Immersion Seawater at 20,000 feet for 30 days; aircraft and fire extinguishing
fluids for 48 hours

Crash-Protected Solid-State Memory

2 GB standard

Aircraft Interface Options

Audio Four inputs; each one is selectable for an area mic (150-6,000 Hz)
at 3mV to 3V or crew audio (150-3,500 Hz) at 50mV to 3V

Rotor Speed One input: 7 Hz to 6 kHz, 2 VRMS to 122 VRMS

ARINC 429 Up to four inputs, one output

ARINC 717 64 to 1024 WPS with data output

ARINC 777 RIPS interface

RS-422/RS-485 . . . One: 19,200 to 921,600 baud

Ethernet One: BASE-T 10/100 with TCP/IP and FTP

Microphone Optional preamp in recorder

Connectors

MIL-C-38999 Series II

Acoustic Beacon Underwater Locating Device (optional)

Meets TSO-C121, with 30-day output and 6-year replaceable battery; reversible for
upright reading and test access; can be located on the right or left side of the
recorder

Control Unit (optional)

ARINC 757-compatible panel-mount unit for audio testing and erasing, with internal and
external cockpit area microphone options

Recorder Independent Power Supply (RIPS)

Optional bolt-down RIPS authorized to ARINC 777 and TSO-C155 for additional
10 minutes of CVFDR power

Other options available. Consult factory for details.

Electrodynamics, Inc.

1200 Hicks Road

Rolling Meadows, IL 60008

Tel: 847.660.1790

Fax: 847.660.1791

Email: edi.info@L-3com.com

www.L-3com.com/edi



communications

Electrodynamics, Inc.

The technical information contained in the marketing brochure(s) does not contain "technology" as defined by the General Technology Note in Export Administration Regulations (EAR) Supplement number 2 to Part 744 and is, therefore, considered as publicly released as defined in Part 734.7(4). Specifications subject to change without notice. Call for latest revision. SRVIVR® is a registered trademark of L-3 ElectroDynamics, Inc. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders. 4/11