


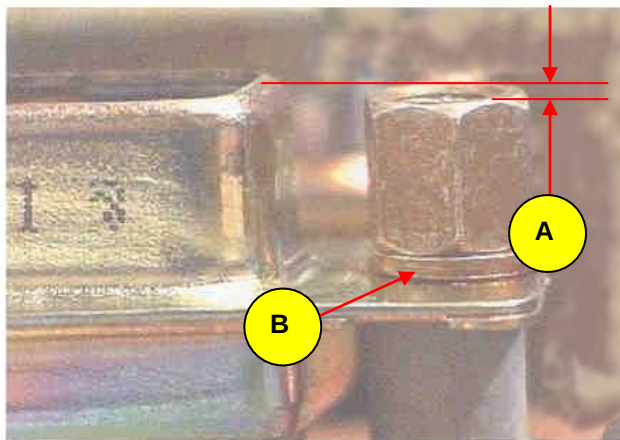

This section addresses the height relationship of the face of the jackpost to the associated connector face. This criteria applies to jackposts that are supplied unassembled (unattached) from the connector, or when the jackposts/hardware are listed as a separate part number on the parts list/bill of material. The hardware stack-up of the flat washers (B) may be varied to meet the required relationship between the jackpost face and the connector face (typically flush to 0.030 inch below the connector face).

**Target**

- Jackpost face (A) is flush to .030 inch below the face of the connector.

**Acceptable**

As an exception to the jackpost height criteria, the jackpost face is permitted to extend above the connector face provided the following conditions are met:

- The connector is as specified on the engineering drawing/parts list and the connector has pre attached (fixed female) jackposts.
- The connector meets the connector drawing specifications/requirements.



communications

Hardware Mounting


WORKMANSHIP STANDARD WS005

4.4.5

Jackpost (cont.)

Defect

- Jackpost face (A) extends above the connector face.

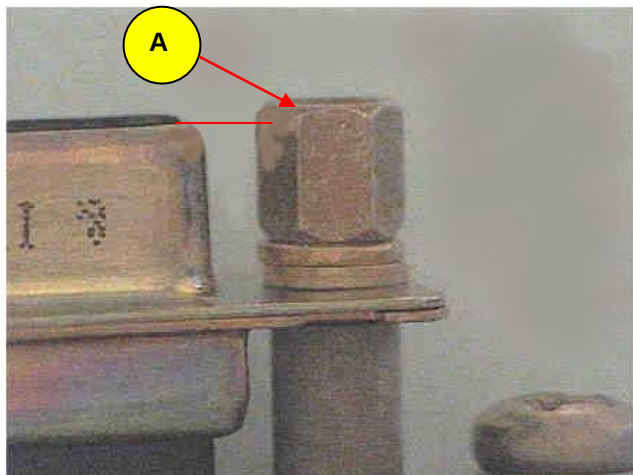

Defect

- Jackpost face (A) is more than .030 inch below the face of the connector.

