

Terminations

50 Years of
Excellence

DC-50 GHz

Millimeter Wave Fixed Terminations

with 2.9 mm and 2.4 mm Connectors

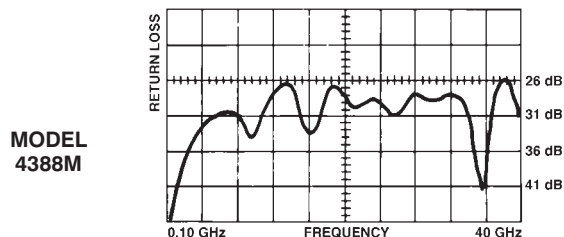
- DC-50 GHz
- Miniature Size
- Low VSWR
- SMA Compatible (2.92 mm only)



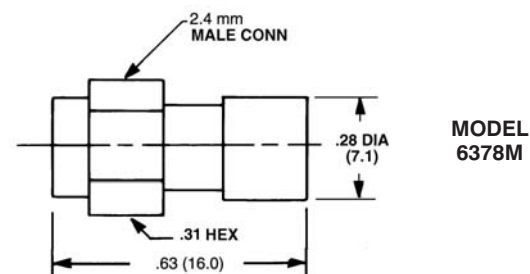
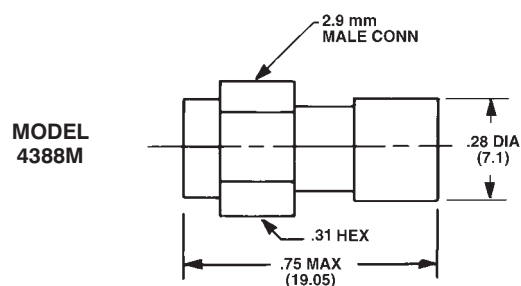
Specifications

FREQUENCY RANGE GHz	MODEL	POWER		VSWR (max)	IMPEDANCE Ohms	WEIGHT (Max)	
		AVERAGE Watts	PEAK kW			Oz	Gr
DC-40	4388M	2.0	0.2	1.20	50	0.16	4.5
DC-50	6378M	1.0	0.2	1.40	50	0.16	4.5

Typical Performance Curves



Outline Drawings

TOL: XX = ± 0.02 (.50)

Dimensions in parentheses are in millimeters and for reference only.



narda

an RF communications company

435 MORELAND ROAD • HAUPPAUGE, NY 11788
 USA TEL: (1) 631 231-1700 • INT'L TEL: (1) 631 231-1390 • FAX (1) 631 231-1711
 E-MAIL: nardaeast@L-3COM.com • www.nardamicrowave.com