

Transfer Switches — DPDT

50 Years of
Excellence

Series 130


DPDT / DC-26.5 GHz / SMA

RF Performance

Frequency Range (GHz)	DC-3	3-8	8-12.4	12.4-18	18-26.5
SWR (Max)	1.2:1	1.3:1	1.4:1	1.5:1	1.7:1
Insertion Loss (Max dB)	0.2	0.3	0.4	0.5	0.7
Isolation (Min dB)	80	70	60	60	50

Additional Specifications

RF Impedance	50 ohms nominal
Actuating Voltage*	28 Vdc
Actuating Current*	Failsafe: 280 mA (max) Latching: 350 mA (max)
Switching Time.	15 ms (max)
Switching Sequence.	Break Before Make
Operating Ambient Temperature	-35°C to +70°C
Operating Life	1 Million Cycles per Position
Designed to	Meet MIL-S-3928

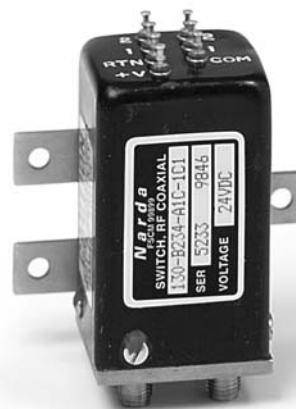

Standard SEM models from this series are available from stock. See page 235 for a complete listing of stock switches, XSEM series.

Options Available

GROUP 2
ACTUATION

- A - FAILSAFE
- B - LATCHING

GROUP 3
OPTIONS

- 0 - NONE
- 2 - INDICATOR CIRCUITRY
- 3 - SUPPRESSION DIODES
- 4 - TTL LOGIC HIGH
- 7 - SELF-DE-ENERGIZING CIRCUITRY
- 9 - OTHER (SPECIFY)
- V - MOSFET DRIVER

GROUP 4
RF
CONNECTORS

- A - SMA
- G - OTHER (SPECIFY)

GROUP 5
TERMINALS

- 1 - SOLDER (STANDARD)
- 2 - **POWER CONNECTOR, FAST DISCONNECT (STANDARD)
- 3 - POWER CONNECTOR, FAST DISCONNECT (SUB MIN "D")
- 4 - SOLDER LOOP
- 5 - OTHER (SPECIFY)

GROUP 6
VOLTAGE

- B - 12 VDC
- C - 24 VDC
- D - 28 VDC
- E - 48 VDC
- G - OTHER (SPECIFY)
- H - 15 VDC
- I - 18 VDC

GROUP 7
FREQUENCY

- 0 - DC - 1 GHz
- 1 - DC - 3 GHz
- 2 - DC - 8 GHz
- 3 - DC - 12.4 GHz
- 4 - DC - 18 GHz
- 5 - DC - 18.5 GHz
- 6 - DC - 26.5
- 7 - OTHER (SPECIFY)

GROUP 8
POLARITY

- A - COMMON PLUS
- B - COMMON MINUS
- C - NOT RELEVANT TO APPLICATION OR SWITCHES WITH LOGIC

GROUP 9
MOUNTING

- 0 - STANDARD MOUNTING HOLES
- 1 - BRACKET
- 3 - OTHER (SPECIFY)

Switch Height (A)
for Selected Options

DIM A ±.03	GROUP 2 ACTUATION	GROUP 3 OPTIONS
1.73	A, D	0,2,3
1.73	B	0,2
2.10	A, D	2,3,4 or 5,V
2.10	B	2,3,4, or 5,7,V
2.50**	B	2,3,4 or 5,7,V
2.50**	A,D	2,3,4 or 5,V



* Specifications for 28 Vdc, 25°C

** Dimension for switches with Standard Narda Power Connector MS3112E-12-8P mating with MS3116E-12-8S.

50 Years of
Excellence


Transfer Switches — DPDT

Typical Schematics

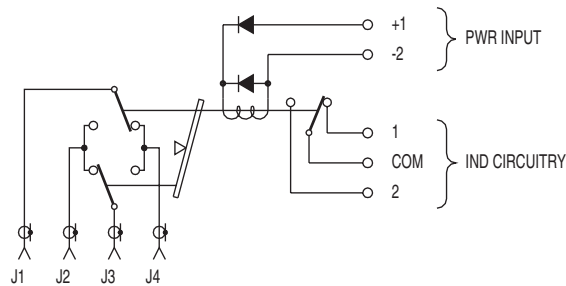

SCHEMATIC SHOWN IN FAILSAFE POSITION

Failsafe DPDT switch with indicator circuitry and suppression diode, common plus. (A23)

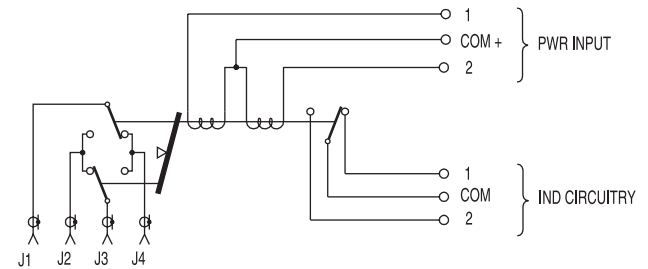

SCHEMATIC SHOWN WITH POSITION 1 CLOSED

Latching, common plus DPDT switch with indicator circuitry. (B2)

Typical Outline Drawings

