



8" x 8" Backlight, A08927



Dual 2" x 2" Backlight, A08922



Backlight Color Filter Adapter, A08931

Single and Dual Backlights

Patented **SCHOTT** Backlights are calibrated to provide bright, even illumination for Microscopy and Machine Vision applications

Features

- Calibrated from ± 13 to ± 15 gray scale levels at a mean of 200, gamma setting of 1.0, using a patented process to create diffuse, uniform illumination within the active area. Line scans are available upon request.
- The white acrylic diffuser plate provides the optimum combination of uniformity and intensity. The backlight housing is made of rugged, black anodized aluminum. The plastic fiber bundle is protected with flexible PVC covered metal tubing.
- Use with strobes and ColdVision Series light sources. Other sources, particularly those without an IR filter, may damage the plastic fibers.
- All our dichroic color filters can be used on the products in conjunction with the A08931 backlight color filter adapter (see photo to left). More details can also be found in the Fiber Optic Accessory section of the product catalog.
- Manufactured in the USA.

Advantages

- Compact, low profile housing fits in small spaces.
- Can be used to create a crisp edge definition, or soft, diffuse incident light.
- Dual and quad backlights increase lighting versatility. Additional combinations and sizes can be custom ordered.

BACKLIGHTS

Backlights					
Part No.	Active Area	Housing Dimensions	Gray Scales	Bundle Length	Common Bundle Length
Single Configuration					
A08920	2" x 2" (51 x 51)	4" x 2.6" x .59" (102 x 66 x 14.9)	± 13	40" (1016)	N/A
A08923	3" x 3" (76 x 76)	6" x 3.5" x .75" (152 x 89 x 16)	± 13	40" (1016)	N/A
A08925	4" x 4.88" (102 x 124)	9" x 5" x .78" (229 x 127 x 19.7)	± 13	40" (1016)	N/A
A08927	8" x 8" (203 x 203)	12" x 9" x 1" (305 x 229 x 25.4)	± 15	40" (1016)	N/A
Dual Configuration					
A08922	2" x 2" (51 x 51)	4" x 2.6" x .59" (102 x 66 x 14.9)	± 13	42" (1067)	10" (254)
A08924	3" x 3" (76 x 76)	6" x 3.5" x .75" (152 x 89 x 15.9)	± 13	40" (1016)	10" (254)
A08926	4" X 4.88" (102 X 124)	9" X 5" X .78" (229 X 127 X 19.7)	± 13	37" (940)	10" (254)



Single and Dual Backlights


Dimensions in () are in mm

Input: Black Anodized Aluminum


Bundle Sheathing: PVC Covered Metal Tubing

Max Fiber Temperature: 70°


Warning: The IR filter on the input protects the fibers from damage caused by IR absorption.

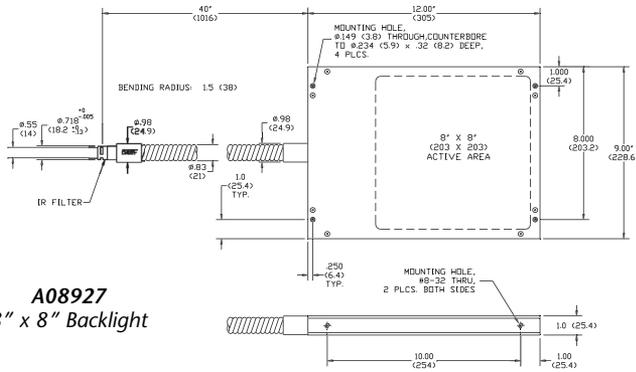

A08927
8" x 8" Backlight

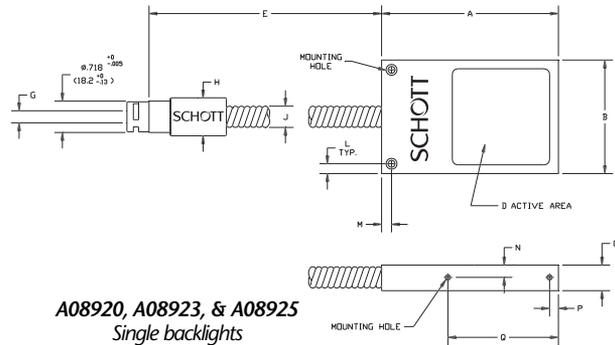

A08920, A08923, & A08925
Single backlights

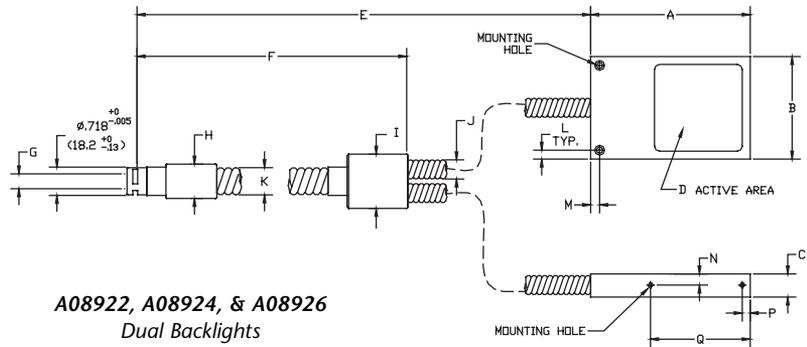

A08922, A08924, & A08926
Dual Backlights

TECHNICAL SPECIFICATIONS

Matrix for Single and Dual Backlights			
Part No.	Housing Dimensions LX X H	Active Area	Overall Bundle Length
Ref. Letter	A, B, C	D	E
A08920	4"x2.6"x.59" (102x66x14.9)	2"x2" (51x51)	40" (1016)
A08922	4"x2.6"x.59" (102x66x14.9)	2"x2" (51x51)	42" (1067)
A08923	6"x3.5"x.75" (152x89x19.1)	3"x3" (76x76)	40" (1016)
A08924	6"x3.5"x.75" (152x89x15.9)	3"x3" (76x76)	40" (1016)
A08925	9"x5"x.78" (229x127x19.7)	4"x4.88" (102x124)	37" (940)
A08926	9"x5"x.78" (229x127x19.8)	4"x4.88" (102x124)	37" (940)

Matrix for Single and Dual Backlights (Continuation)										
Part No.	Common Bundle Length	Active Input Dia.	Ferrule Dia	Coupler Dia	Tubing Dia	Top Mounting Hole Location	Top Mounting Hole Dimensions	Side Mounting Hole Location	Side Mounting Hole Dimensions	Bend Radius
Ref. Letter	F	G	H	I	JK	L/M	THRU/DIA/C'BORE DIA/DEPTH	N/P/Q	THREAD/DEPTH	
A08920	N/A	.28" (7.0)	.87" (22.1)	N/A	.47" (12)	.225"/.225" (5.72/5.72)	.156"/.25"/.150" (4.0/6.4/3.8)	28"/.20"/2.50" (7.2/5.1/63.5)	#4-40 UNC 2A/.38 (9.6)	.6" (15)
A08922	10" (254)	.39" (9.9)	.87" (22.1)	1.38" (34.9)	.47"/.67" (12/17)	.225"/.225" (5.72/5.72)	.156"/.25"/.150" (4.0/6.4/3.8)	.28"/.20"/2.50" (7.16/5.1/63.5)	#4-40 UNC 2A/.38 (9.6)	.6"/1.2" (15)/(30)
A08923	N/A	.32" (8.1)	.87" (22.1)	N/A	.60" (15)	.187"/.187" (4.75/4.75)	.177"/.28"/.165" (4.5/7.1/4.2)	.32"/1.00"/5.00" (8.1/25.4/127)	#6-32/.25" (6.4)	1" (25)
A08924	10" (254)	.46" (11.7)	.87" (22.1)	1.38" (34.9)	.60"/.83" (15/21)	.187"/.187" (4.75/4.75)	.177"/.28"/.165" (4.5/7.1/4.2)	.32"/1.00"/5.00" (8.1/25.4/127)	#6-32/.25" (6.4)	1"/1.5" (25)/(38)
A08925	N/A	.39" (9.9)	.87" (22.1)	N/A	.68" (17.3)	.425"/.425" (10.80/10.80)	.250"/.50"/.300" (6.4/12.7/7.6)	.36"/.20"/5.75" (9.1/5.08/151)	#6-32 UNC2A/.38 (9.6)	1" (25)
A08926	10" (254)	.55" (13.8)	.98" (24.9)	1.50" (38.1)	.68"/.83" (17/21)	.425"/.425" (10.80/10.80)	.250"/.50"/5.00" (6.4/12.7/7.6)	.36"/.20"/5.75" (9.1/5.08/146)	#6-32 UNC 2A/.38" (9.6)	1/1.5" (25)/(38)

Fiber Optics
SCHOTT GLAS
 P.O. Box 2480
 55014 Mainz
 Germany
 Phone: +49(0) 61 31 / 66-0
 Fax: +49(0) 61 31 / 66-7850
 E-mail: fiberoptics.info@schott.com
www.schott.com/fiberoptics

Fiber Optics
SCHOTT North America, Inc.
 62 Columbus Street
 Auburn, NY 13021-3137
 USA
 Phone: +1 315 / 255-2791
 Fax: +1 315 / 255-2695
 E-mail: fiberoptics.auburn@us.schott.com
www.us.schott.com/fiberoptics

