


**TYPICAL PROPERTIES**

(To be used as a guideline only)

|  |                                 |
|--|---------------------------------|
| NUMBER OF COMPONENTS .....                   | Two                             |
| MIXING RATIO .....                           | PARTS BY WEIGHT                 |
| Part "A" .....                               | 10                              |
| Part "B" (hardener) .....                    | 1                               |
| Keep containers closed when not in use       |                                 |
| Mixed volume should not exceed 25 grams      |                                 |
| CURE SCHEDULE (minimum)                      |                                 |
| 150°C .....                                  | 1 minute                        |
| 120°C .....                                  | 2-5 minutes                     |
| 100°C .....                                  | 5-10 minutes                    |
| 80°C .....                                   | 15-30 minutes                   |
| PHYSICAL PROPERTIES                          |                                 |
| Color .....                                  | Amber                           |
| Consistency .....                            | Pourable liquid                 |
| Viscosity (mixed)                            |                                 |
| @ 50 rpm/23°C .....                          | 3,000 - 5,000 cPs               |
| Specific Gravity                             |                                 |
| Part "A" .....                               | 1.20                            |
| Part "B" .....                               | 1.02                            |
| Glass Transition Temp. (Tg)                  |                                 |
| cured @ 150°C/1 hour .....                   | 120°C                           |
| Coefficient of Thermal Expansion (CTE)       |                                 |
| Below Tg .....                               | 54 x 10 <sup>-6</sup> in/in/°C  |
| Above Tg .....                               | 160 x 10 <sup>-6</sup> in/in/°C |
| Operating Temp. Range ..                     | - 50 to + 200°C continuous      |
| Degradation Temp. (TGA) .....                | 400°C                           |
| Outgas @ 200°C .....                         | 0.8%                            |
| @ 250°C .....                                | 1.2%                            |
| Shore D Hardness .....                       | 87                              |
| Lap Shear Strength @ 25°C (Al to Al) .....   | 2,000 psi                       |
| Flexural Strength .....                      | 10,600 psi                      |
| Compressive Strength .....                   | 20,200 psi                      |
| Storage Modulus .....                        | 435,000 psi                     |
| Impact Resistance (ASTM-D-256-56) ..         | 0.38 ft/lb.-in.                 |
| Moisture Resistance: (MIL-1-16923-D)         |                                 |
| (7 days@ 96% RH) Weight/1 hr/100°C .....     | 0.03%                           |
| Flammability: .....                          | Federal Std. 406                |
| Method 2021 .....                            | Self Extinguishing              |
| OPTICAL PROPERTIES                           |                                 |
| Index of Refraction .....                    | 1.560                           |
| Spectral Transmission                        |                                 |
| >50% @ 500 nm                                |                                 |
| >95% @ 700-2µ                                |                                 |
| ELECTRICAL/THERMAL PROPERTIES                |                                 |
| Thermal Conductivity .....                   | 0.34 W/m <sup>2</sup> K         |
| Thermal Shock Resistance .....               | Passed                          |
| 1000 cycles - 55°C to 150°C                  |                                 |
| POT LIFE .....                               | 4 hours                         |
| SHELF LIFE                                   |                                 |
| One (1) year when stored at room temperature |                                 |
| REFRIGERATION IS NOT REQUIRED                |                                 |
| NONTOXIC - complies with USP Class VI        |                                 |
| biocompatibility standards                   |                                 |

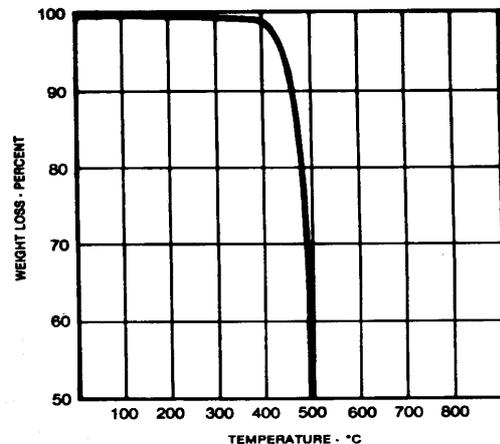

THERMAL STABILITY AS DETERMINED BY THERMOGRAVIMETRIC ANALYSIS IN AIR AT A SCAN RATE OF 20°C/min.


EPO-TEK 353ND is a two component, 100% solids, heat curing epoxy designed for high temperature applications. Although EPO-TEK 353ND will perform continuously at 200°C, it will also endure +300-400°C for several minutes. EPO-TEK 353ND has excellent resistance to many types of solvents and chemicals and is ideal for bonding fiber optics, metals, glass, ceramics and most plastics.

Some unique features of EPO-TEK 353ND are: long pot life, good handling characteristics, low dermatetic response, excellent wicking into fiber optic bundles, and conveniently changes color from amber to dark red upon cure.

EPO-TEK 353ND is recommended to be used only in thin or thick film applications. Other applications where extra thick sections are needed, it is recommended to gel the system at room temperature or slightly above room temperature followed by a short post cure at elevated temperature.

EPO-TEK 353ND can be applied by brush, dipping, pouring or mechanical dispensing techniques.

Based on outgassing test results by NASA, EPO-TEK 353ND is approved for space flight programs.

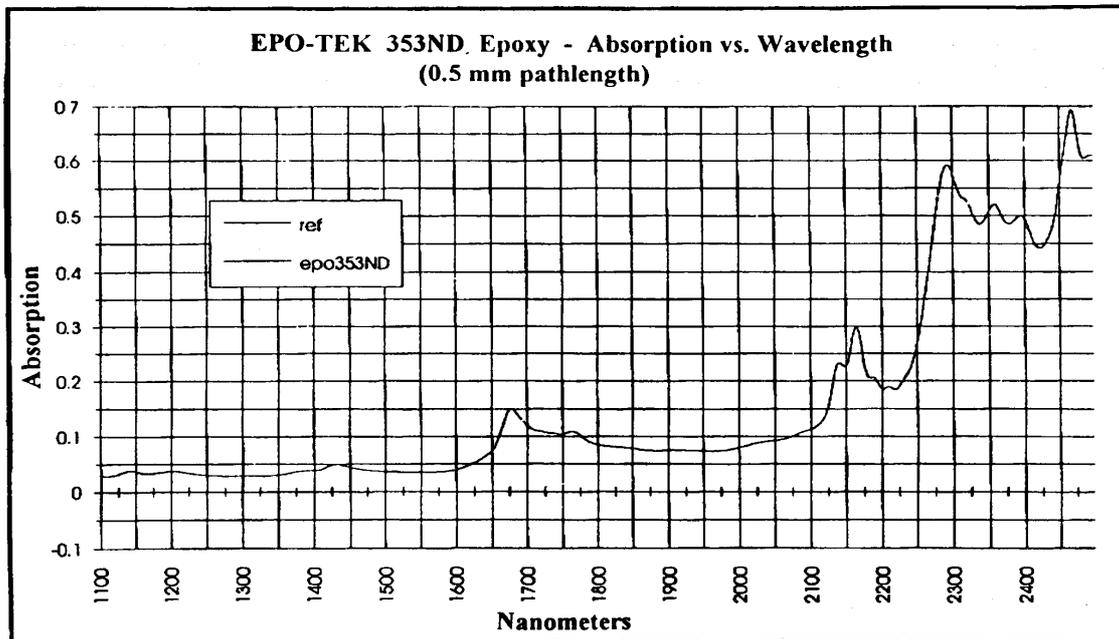

**Polytec GmbH**

**Zur Beachtung:**

Vorstehende Angaben können nur allgemeine Hinweise sein. Bei den aufgeführten Eigenschaften und Leistungsmerkmalen handelt es sich um circa-Werte, diese sind nicht Teil der Produktspezifikation. Wegen der außerhalb unseres Einflusses liegenden Verarbeitungs- und Anwendungsbedingungen und der Vielzahl unterschiedlicher Materialien empfehlen wir, in jedem Fall zunächst ausreichende Eigenversuche durchzuführen. Eine Haftung für konkrete Anwendungsergebnisse kann daher aus den Angaben und Hinweisen in diesem Merkblatt nicht abgeleitet werden.

Mit Erscheinen dieser Ausgabe verlieren alle vorhergehenden technischen Merkblätter ihre Gültigkeit. Sicherheitsrelevante Daten können dem Sicherheitsdatenblatt entnommen werden.

Änderungen vorbehalten / Stand : 29.07.2004

**Polytec GmbH**

Polymer Technologien Polytec-Platz 1-7 76337 Waldbronn Germany

Tel. ++49 (0) 7243 604-175 Fax ++49 (0) 7243 604-382

E-mail: [pt@polytec.de](mailto:pt@polytec.de) <http://www.polytec.de>