

Digital line scan cameras DVL / DVLC serie




Optoelectronic characteristics

Number of pixels	pixels	3 x 2098
Size of pixels	$\mu\text{m} \times \mu\text{m}$	14 x 14
Photo-sensitive area	$\text{mm} \times \mu\text{m}$	3 x (29,372 x 14) - (pitch : 112)
Sensitivity	Typical sensitivity at unity gain (lsb/lux.s)	nd
Typical non-uniformity	% (without filtering)	$\pm 2,5$
Maximum non-uniformity	% (without filtering)	± 5
Pixel frequency	MHz	3 x 6,66 = 20
Maximum line frequency	kHz	3,1
Electronic shutter		yes
Antiblooming		no
RMS noise	lsb (16 bits)	
Rise time	pixels	
Output video formats		16 bits RS422 8 bits RS422 16 bits LVDS (RS644) camera link
Lens mounts		F-Nikon 24x36 M42 with screws Leica 39 with screws
Power supply	v	from 10 to 24
Power	w	
Fixing		4 possible mounting surfaces with 4 x M4 screws
Positioning		mechanical positioning by centring studs and reference surface.
Storage temperature	$^{\circ}\text{C}$	- 20 $^{\circ}\text{C}$ / + 80 $^{\circ}\text{C}$
Operating temperature	$^{\circ}\text{C}$	0 $^{\circ}\text{C}$ / + 50 $^{\circ}\text{C}$
Weight	g	780
Gain		programming via RS232 serial line, from 1 to 12
Offset		programming via RS232 serial line
Filtering		programming via RS232 serial line

D
V
L
C
2
0
9
8
K

Signals

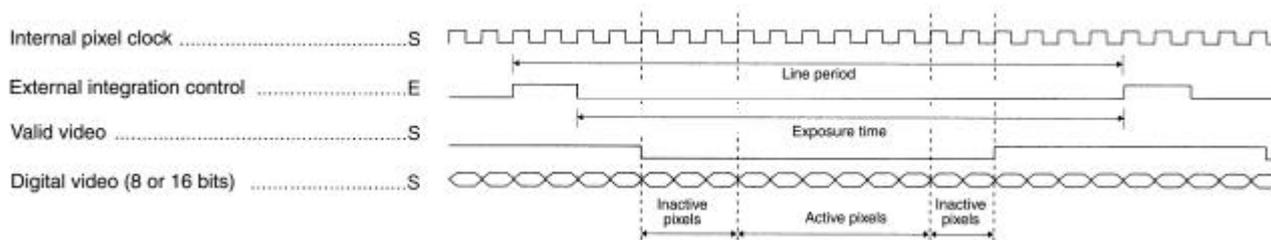


For cameras without electronic shutter, exposure time is equal to line period.

www.lord-ing.com


LORD Ingénierie - Z.A. de Marly - B.P. 110 - 91410 CORBREUSE - France
Tél: +33 (0) 164 551 551 - Fax: +33 (0) 164 595 595 - Email: sales@lord-ing.com

Mechanical characteristics (in millimeters)

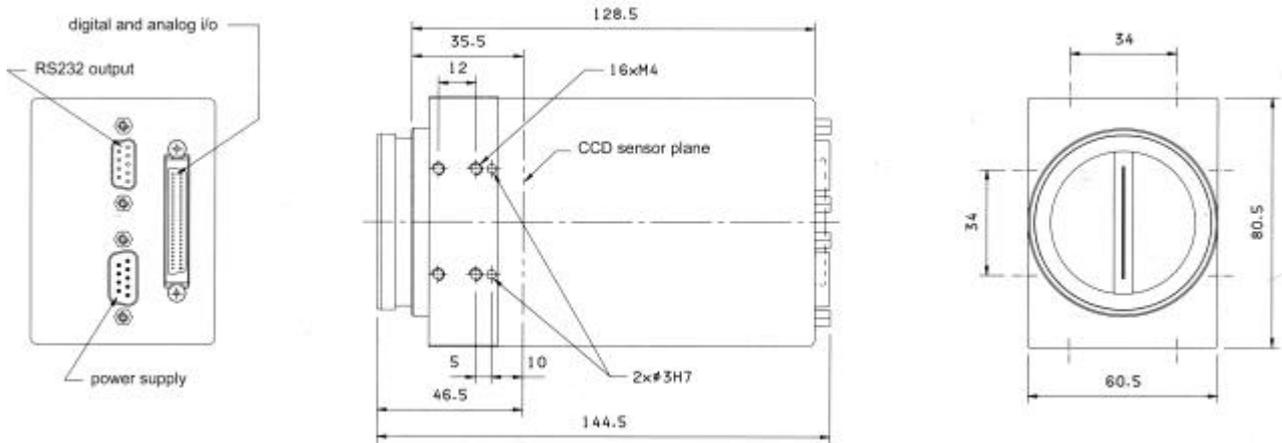

Dimensions of cameras with F-Nikon mount.

Spectral sensitivity characteristics

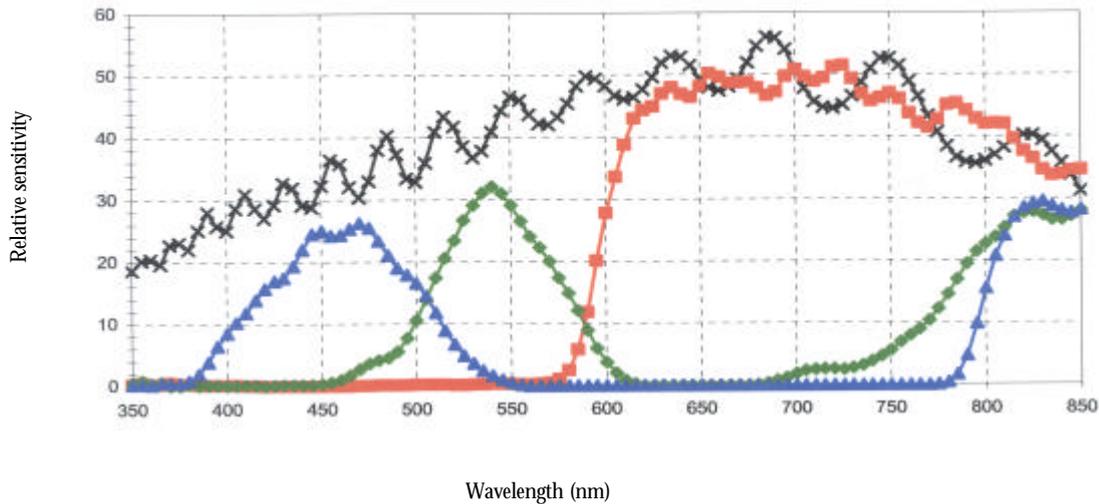

Ordering references

DVLC2098K/S0/MF	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 8 bits, RS422, and F-Nikon mount
DVLC2098K/S0/M39	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 8 bits, RS422, and Leica 39 mount
DVLC2098K/S0/M42	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 8 bits, RS422, and 42 mount with screws
DVLC2098K/S0/PM	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 8 bits, RS422, and without mount
DVLC2098K/S1/MF	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 16 bits, RS422, and F-Nikon mount
DVLC2098K/S1/M39	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 16 bits, RS422, and Leica 39 mount
DVLC2098K/S1/M42	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 16 bits, RS422, and 42 mount with screws
DVLC2098K/S1/PM	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, 16 bits, RS422, and without mount
DVLC2098K/S2/MF	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, LVDS output, and F-Nikon mount
DVLC2098K/S2/M39	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, LVDS output, and Leica 39 mount
DVLC2098K/S2/M42	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, LVDS output, and 42 mount with screws
DVLC2098K/S2/PM	Digital colour line scan camera 3 x 2098 pixels, 3 x 6,33 MHz, LVDS output, and without mount

www.lord-ing.com

LORD Ingénierie - Z.A. de Marly - B.P. 110 - 91410 CORBREUSE - France
Tél: +33 (0) 164 551 551 - Fax: +33 (0) 164 595 595 - Email: sales@lord-ing.com