



Gooseneck light guide



Gooseneck light guide bifurcated

Gooseneck Light Guides

Features

- Flex and stay light guides.
- Black laquered semi-rigid gooseneck tubing.
- Focussing optics with color filter option available.
- Manufactured in the EU.


Benefits

- Precise positioning offers complete control of light placement.
- Gooseneck branches positioned in opposite directions create near shadow-free illumination.
- Re-adjust with ease.
- Dual models illuminate workspace with a single light source.


Gooseneck Light Guides, 1-, 2- and 3- branch										
Cold light source	Part-No.	Type	Length	End tip Ø	End tip Ø length	Active Ø/ branch	Active common end Ø	Jacketing material	Outer Ø Jacketing	Light source adapter Ø
			L	E	l	b	B		D	F
KL 200 KL 200 LED	170 101	1 branch	500 mm 19.69 inch	6 mm 0.24 inch	20 mm 0.79 inch	3.5 mm 0.14 inch	3.5 mm 0.14 inch	Flex & Stay	11 mm 0.43 inch	9 mm 0.35 inch
	170 202	2 branch	500 mm 19.69 inch	6 mm 0.24 inch	20 mm 0.79 inch	3.5 mm 0.14 inch	5 mm 0.20 inch			
KL 1500*	154 101	1 branch	600 mm 23.62 inch	6 mm 0.24 inch	20 mm 0.79 inch	4.5 mm 0.18 inch	4.5 mm 0.18 inch	Flex & Stay	11 mm 0.43 inch	10 mm 0.39 inch
KL 2500 LCD	154 202	2 branch	600 mm 23.62 inch	6 mm 0.24 inch	20 mm 0.79 inch	4.5 mm 0.18 inch	6.4 mm 0.26 inch			
	154 302	3 branch	600 mm 23.62 inch	6 mm 0.24 inch	20 mm 0.79 inch	4.5 mm 0.18 inch	7.8 mm 0.31 inch			

* LCD, compact, LED

Gooseneck Light Guides

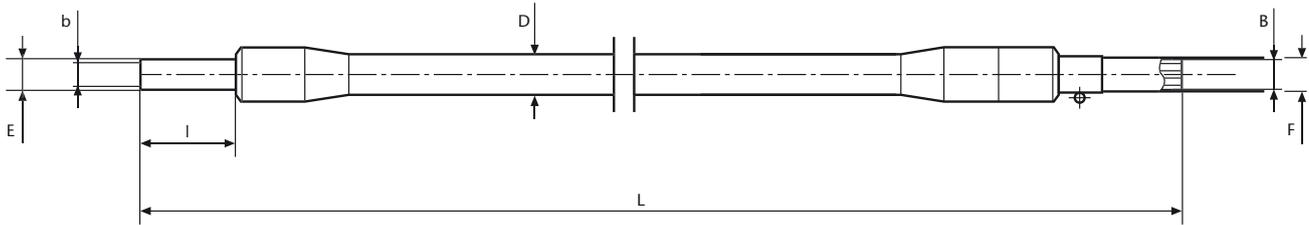

1-branch

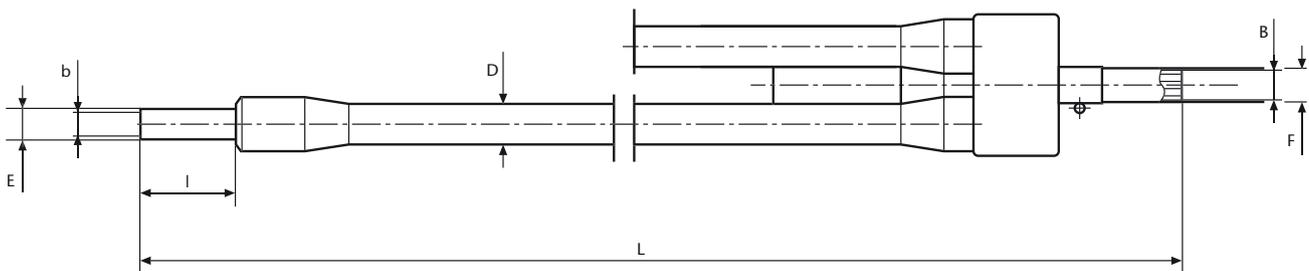

2- and 3-branch

Lighting and Imaging
SCHOTT AG
Otto-Schott-Strasse 2
55127 Mainz
Germany

Phone: +49 (0)6131/66-7796
Fax: +49 (0)6131/66-7850
lightingimaging@schott.com
www.schott.com/lightingimaging

For your local sales contact please visit
www.schott.com/lightingimaging/english/contact

SCHOTT
glass made of ideas