


Product Data Sheet

page 1 of 3

LED Lamp Infra Red
EOLD-810-525

Rev. 01 aus 2011

Radiation	Type	Case
Infra Red	DDH	5mm plastic lens

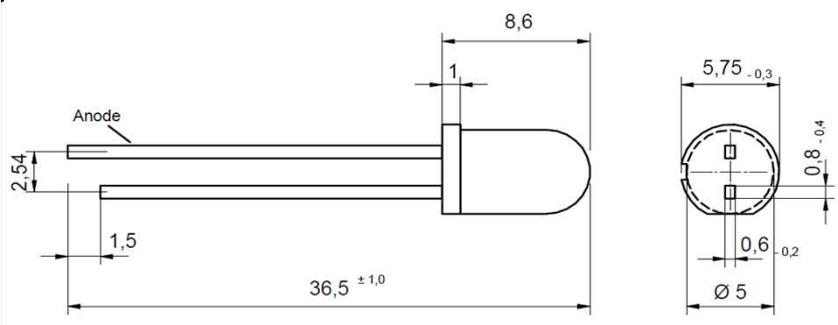Description:	
	
Applications:	
High-power, high-speed infrared LED, with lens for narrow beam angle, and high reliability, housing without standoff leads Optical communications, safety equipment, automation, optical sensors	

Maximum Ratings
 $T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

Parameter	Test Conditions	Symbol	Value	Unit
Forward Current		I_F	100	mA
Peak forward current	$(t_p \leq 50 \mu\text{s}, t_p/T = 1/2)$	I_{FM}	200	mA
Power dissipation		P_D	240	mW
Operating temp. range		T_{amb}	-20 to +85	$^{\circ}\text{C}$
Storage temp. range		T_{stg}	-40 to +100	$^{\circ}\text{C}$
Junction temperature		T_J	100	$^{\circ}\text{C}$

Optical and Electrical Characteristics
 $T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Min	typ	max	Unit
Forward voltage	V_F	$I_F = 20\text{mA}$		1.4	1.7	V
Forward voltage*	V_F	$I_F = 100\text{mA}$		1.6		V
Reverse voltage	V_R	$I_R = 10\mu\text{A}$	5			V
Radiant Power	Φ_e	$I_F = 20\text{mA}$	6	9		mW
Radiant Power*	Φ_e	$I_F = 100\text{mA}$	30	45		mW
Radiant intensity	I_e	$I_F = 20\text{mA}$	25	35		mW/sr
Radiant intensity*	I_e	$I_F = 100\text{mA}$		170		mW/sr
Peak wavelength	λ_p	$I_F = 20\text{mA}$	800	810	820	nm
Spectral bandwidth at 50%	$\Delta\lambda_{0.5}$	$I_F = 20\text{mA}$		30		nm
Viewing angle	φ	$I_F = 20\text{mA}$		20		deg.
Switching time	t_r, t_f	$I_F = 20\text{mA}$		40		ns

*measured after 30s current flow




Product Data Sheet


LED Lamp Infra Red

EOLD-810-525


Radiant power vs. forward current (typical)
normalized to Φ_E @ $I_F = 20$ mA

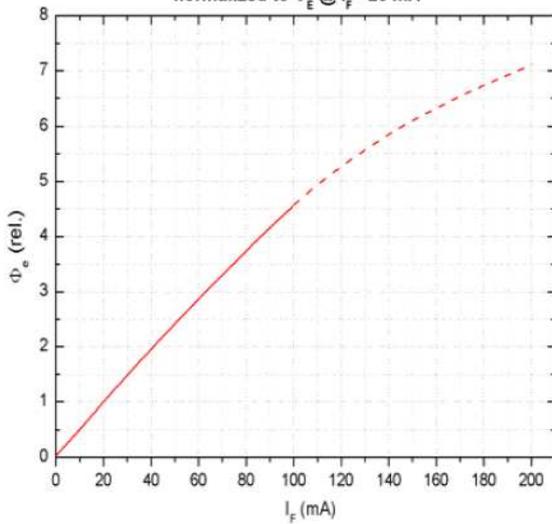


Forward current vs. forward voltage (typical)

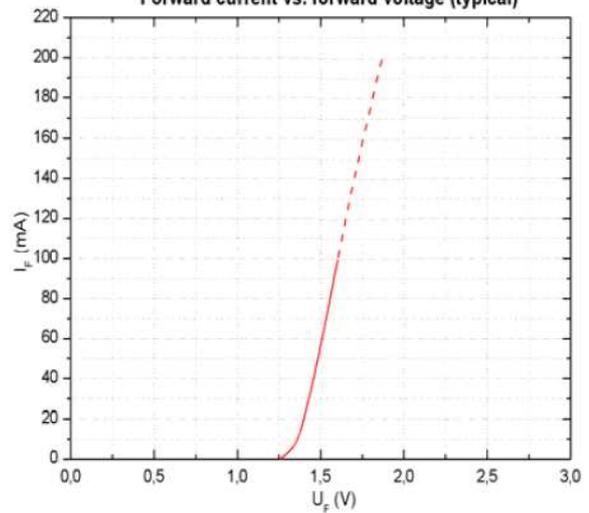

Spectral power distribution (typical)
at $I_F = 20$ mA

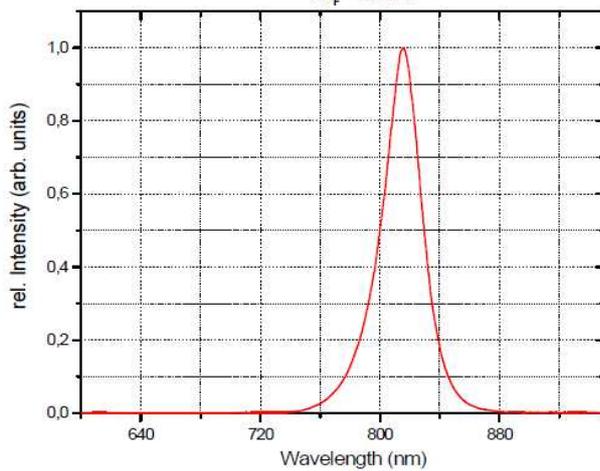



Typical wavelength shift vs. forward current
(rel. to λ_p @ $I_F = 20$ mA)

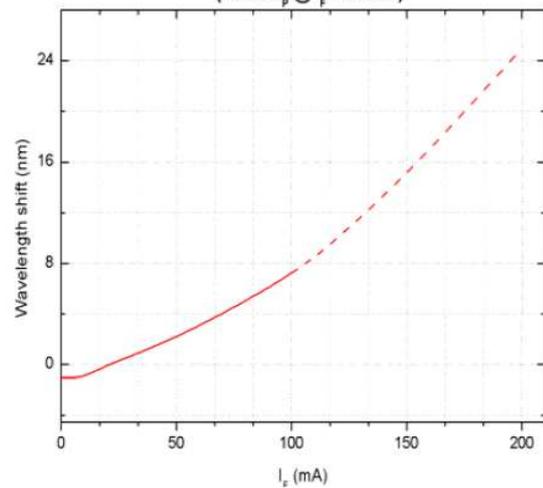

Product Data Sheet

LED Lamp Infra Red

EOLD-810-525

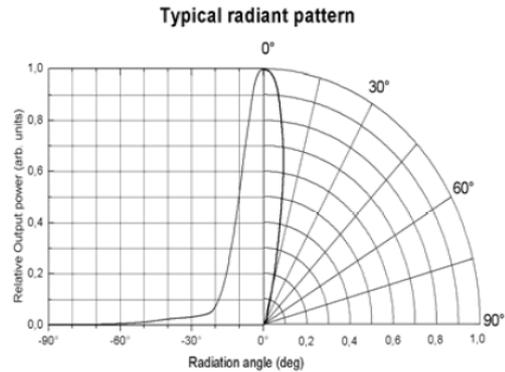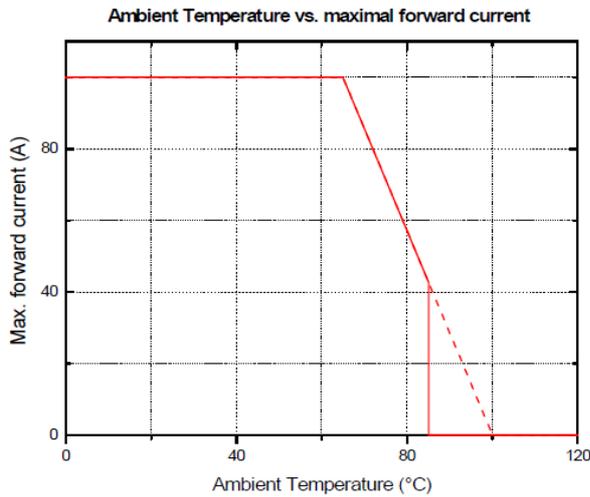

Remarks concerning optical radiation safety*

At low forward current (<50 mA), and continuous operation, this LED may be classified as LED product Class 1, according to standard IEC 60825-1:A2. Class 1 products are safe to eyes and skin under reasonably predictable conditions. This implicates a direct observation of the light beam by means of optical instruments.

When driven with higher continuous forward current, (up to 100 mA), this product should be classified as LED product Class 1M, according to standard IEC 60825-1:A2. Class 1M products are safe to eyes and skin under normal conditions, including when users view the light beam directly. Class 1M products produce either a highly divergent beam or a large diameter beam, so only a small part of the whole light beam can enter the eye. However, such optical products can be harmful to the retina if the beam is viewed using magnifying optical instruments. Therefore, users should not incorporate optics that could concentrate the output into the eyes.

*Note: Safety classification of an optical component mainly depends on the intended application and the way the component is being used. Furthermore, all statements made to classification are based on calculations and are only valid for this LED "as it is", and at continuous operation. Using pulsed current or altering the light beam with additional optics may lead to different safety classifications. Therefore these remarks should be taken as recommendation and guideline only.



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

