



Ring lights with lens thread


This ring light can be easily mounted in two ways:

- By a small bracket (order no. LAD3 7218)
- By a standard lens adapter with a lens thread of 37 x 0.75 mm. Various threads are available to fit different lenses

The best evenness of light will be achieved at a working distance of 20-25 mm. A diffuser is included.




Mechanical dimensions

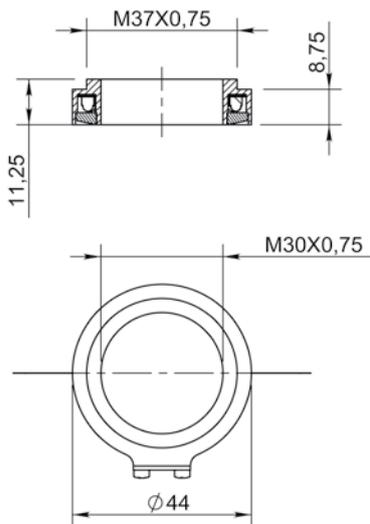

Step files available on request

Options

- Cable length and type see "Order options"
- Lens adapters for different lens threads on request
- Bracket LAD3 7218:

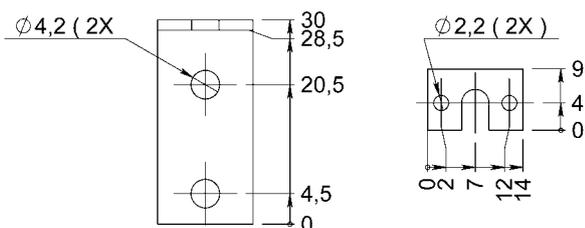

Order information

Order number	Sizes (mm)		Working distance (mm)	Controller ¹⁾	
	outer Ø	inner Ø		steady mode	strobe mode
SAX3 1044	44	29	20-25	1 A	8 A

¹⁾ See controller selection for details

Color information

Replace "X" in order number by one character ²⁾	Color	Wavelength
H	Red	617 nm
W	White	
R	IR	880 nm
B	Blue	465 nm
G	Green	520 nm
U	UV	395 nm

²⁾ Example for red ring light: SAH3 1044