


# VD-04 *Velocity Decoder*

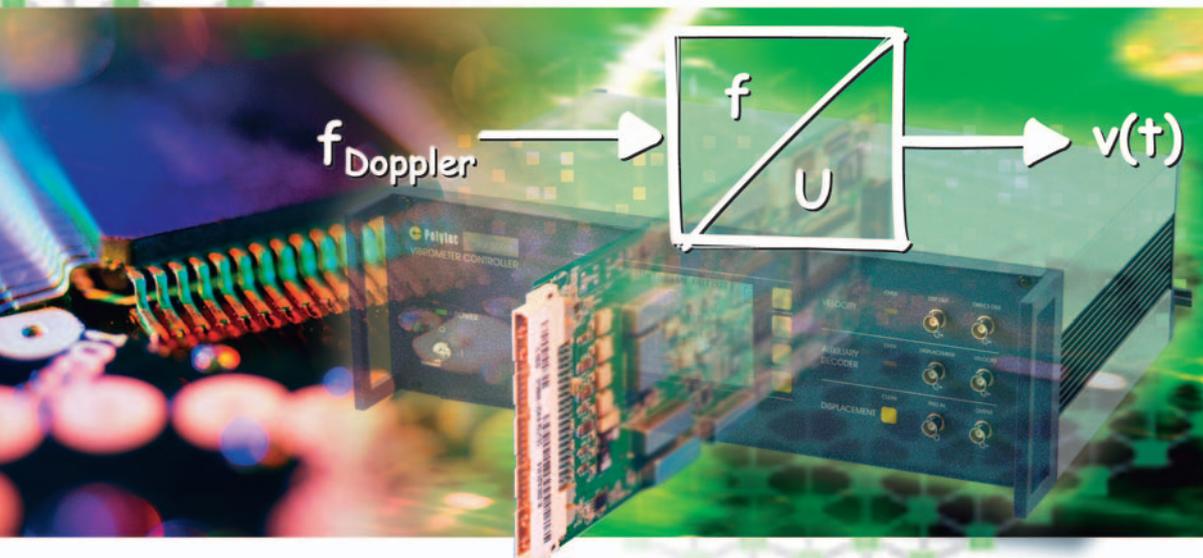

## MODULAR VIBROMETER SYSTEM

- OFV-5000  
Vibrometer Controller
  - Velocity Decoders
  - Displacement Decoders
- OFV-505/503  
Standard Sensors
- OFV-511/512  
Fiber-Optic Sensors

## MEASURING VIBRATION VELOCITY

*Signal processing is one of the most sensitive parts of any Laser Doppler Vibrometer system. The quality of dedicated velocity decoders available for the OFV-5000 Controller defines the accuracy, linearity, sensitivity and signal-to-noise ratio of the system.*

### Velocity Decoding in Laser Vibrometer Systems

Polytec Laser Doppler Vibrometers operate on the Doppler principle, measuring back-scattered laser light from a vibrating structure, to determine its vibrational velocity and displacement. A vibrometer system comprises controller electronics and a non-contact standard-optic or fiber-optic sensor head. The controller provides signals and power for the sensor head, and processes the vibration signals. These are electronically converted by specially developed decoders within the controller to obtain velocity and displacement information about the test structure. A vibrometer system based on the OFV-5000 Controller can measure vibration frequencies from 0 Hz up to 20 MHz. Velocities can be as small as 0.1  $\mu\text{m/s}$  up to 10 m/s. Different measurement ranges demand appropriate decoders. To meet this demand Polytec offers a range of analog and digital decoders with different characteristics. Two velocity decoders can be operated simultaneously.

### The VD-04 Mid-Range Velocity Decoder

The VD-04 was specially designed to work in combination with the DD-400 displacement decoder which is based on an analog integrator and requires the VD-04 for operation (see DD-400 data sheet).

Three measurement ranges with 0.5 Hz to 250 kHz bandwidth provide a dynamic range from < 1  $\mu\text{m/s}$  up to 10 m/s.

#### Key Features of the VD-04

- High linearity and low noise level
- 3 measurement ranges: 100  $\mu\text{m/s}$ , 1.0 m/s and 10 m/s full scale peak
- Best resolution: < 0.2  $\mu\text{m s}^{-1}/\sqrt{\text{Hz}}$
- Upper frequency limit of 250 kHz
- Maximum acceleration 1,600,000 g


## VD-04 Technical Data

Measurement Range	Full Scale Output (Peak)*	Resolution**	Signal Frequency Range	Max. Acceleration	Max. Linearity Error
mm/s/V	m/s	$\mu\text{m s}^{-1}/\sqrt{\text{Hz}}$	Hz	g	% of reading
10	0.1	0.2	0.5 – 250 k	16,000	1.0
100	1.0	0.5	0.5 – 250 k	160,000	1.0
1,000	10.0	2.0	0.5 – 250 k	1,600,000	1.0

\* The full scale values correspond to the maximum output voltage of  $10 V_{\text{peak}}$ .

\*\* The resolution is defined as the signal amplitude (rms) that produces 0 dB signal/noise ratio with 1 Hz spectral resolution at 50 %  $f_{\text{max}}$ .

## VD-04 Range Diagram

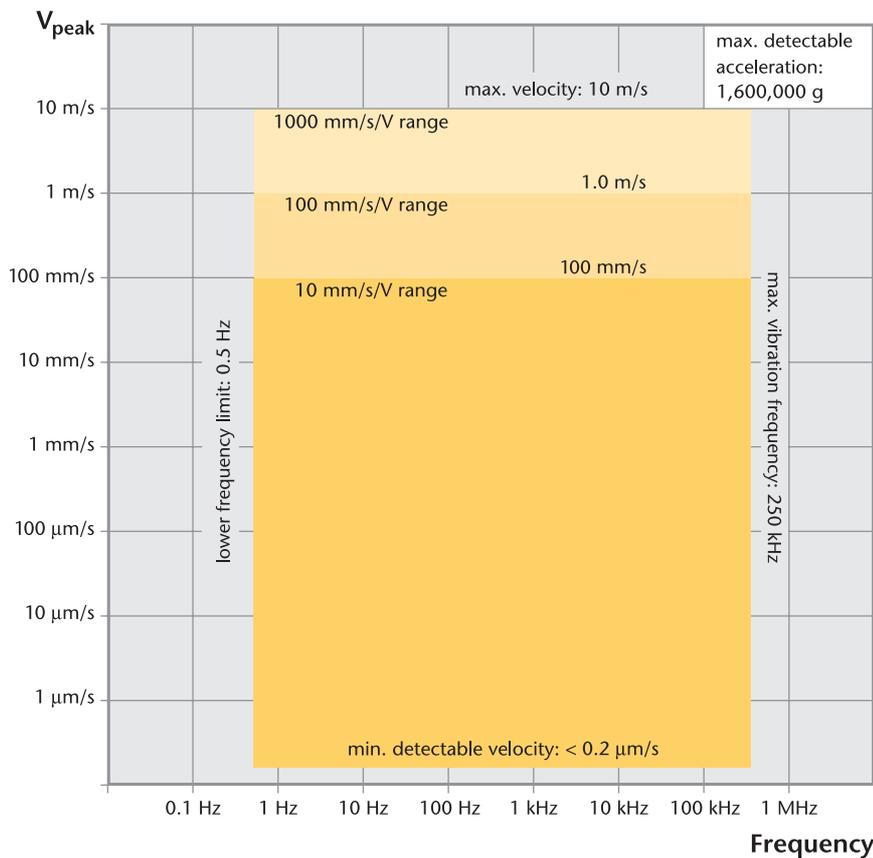

## Data Acquisition

For PC-based data acquisition and processing we recommend our VibSoft Packages. VibSoft-1000 is a comprehensive software for dual channel data acquisition at 1 MHz bandwidth best suited for the VD-04 decoder. Four channels are accessible by using VibSoft-1004. For frequencies up to 80 kHz we recommend VibSoft-80 and VibSoft-84, resp.

For more information on selection and combination of signal decoders please see OFV-5000 and Decoder Guide data sheets or contact your local vibrometer sales/application engineer.

**Polytec GmbH**  
 Polytec-Platz 1-7  
 76337 Waldbronn  
 Germany  
 Tel. + 49 (0) 7243 604-0  
 Fax + 49 (0) 7243 69944  
 info@polytec.de

**Polytec-PI, S.A. (France)**  
 32 rue D elizy  
 93694 Pantin  
 Tel. + 33 (0) 1 48 10 39 34  
 Fax + 33 (0) 1 48 10 09 66  
 info@polytec-pi.fr

**Lambda Photometrics Ltd. (Great Britain)**  
 Lambda House, Batford Mill  
 Harpenden, Herts AL5 5BZ  
 Tel. + 44 (0) 1582 764334  
 Fax + 44 (0) 1582 712084  
 info@lambdaphoto.co.uk

**Polytec KK (Japan)**  
 Hakusan High Tech Park  
 1-18-2 Hakusan, Midori-ku  
 Yokohama-shi, 226-0006  
 Kanagawa-ken  
 Tel. +81 (0) 45 938-4960  
 Fax +81 (0) 45 938-4961  
 info@polytec.co.jp

**Polytec, Inc. (USA)**  
 North American Headquarters  
 1342 Bell Avenue, Suite 3-A  
 Tustin, CA 92780  
 Tel. +1 714 850 1835  
 Fax +1 714 850 1831  
 info@polytec.com

Midwest Office  
 3915 Research Park Dr.,  
 #A12  
 Ann Arbor, MI 48108  
 Tel. +1 734 662 4900  
 Fax +1 734 662 4451

East Coast Office  
 25 South Street, Suite A  
 Hopkinton, MA 01748  
 Tel. +1 508 544 1224  
 Fax +1 508 544 1225