



Annular mini ringlight

Mini Ringlight

Features

- Continuous ring of illumination fiber within the housing.
- Mounts directly to objective by means of thumb screw.
- Optimized illumination of the mini ringlight only requires a comparably small fiber bundle diameter.
- Therefore the SCHOTT Mini Ringlight has an interchangeable adapter with removable ferrules, which allows the connection to all KL light sources.
- Manufactured in the EU.

Benefits


- Absolute shadow-free illumination.
- Small dimensions for easy handling.

Mini Ringlight									
Cold light source	Part-No.	Type	Length	Inner Ø	Outer Ø	Height	Minimum working distance*	Active Ø/ branch	Outer Ø Jacketing
			L	ID	OD	H	A	b	D
KL 200	157 040	Slit-RL	1000 mm	40 mm	64 mm	24 mm	15 mm	7 mm	11.8 mm
KL 200 LED		40 mm Ø	39.37 inch	1.58 inch	2.52 inch	0.95 inch	0.58 inch	0.28 inch	0.47 inch
KL 1500 LCD									
KL 1500 compact									
KL 1500 LED									
KL 2500 LCD									

* Ringlight usable in any working distance above given minimum values.

Product improvements may result in specification or feature changes without notice.

Mini Ringlight

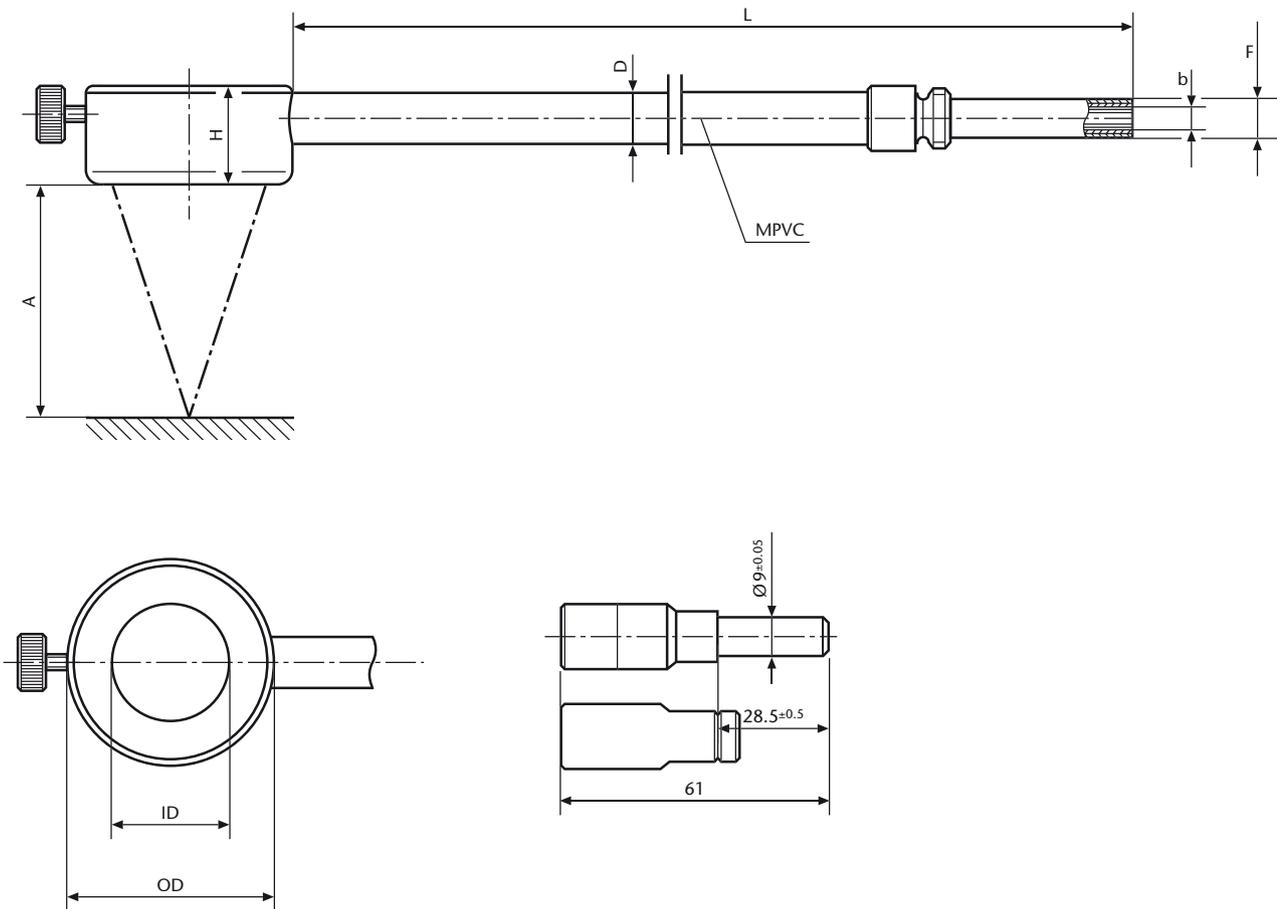

Lighting and Imaging
SCHOTT AG
Otto-Schott-Strasse 2
55127 Mainz
Germany

Phone: +49 (0)6131/66-7796
Fax: +49 (0)6131/66-7850
lightingimaging@schott.com
www.schott.com/lightingimaging

For your local sales contact please visit
www.schott.com/lightingimaging/english/contact

SCHOTT
glass made of ideas