


# PDV-100 Portable Digital Vibrometer

High Resolution Digital Velocity Measurement



# PDV-100

Polytec's PDV-100 Portable Digital Vibrometer measures surface vibration velocity without contact, utilizing Laser Doppler Vibrometry (LDV) technology. The unique combination of state-of-the-art optics, digital signal processing and Polytec design experience yields excellent measurement performance, ease-of-use and long-term calibration stability in a truly portable and robust package.

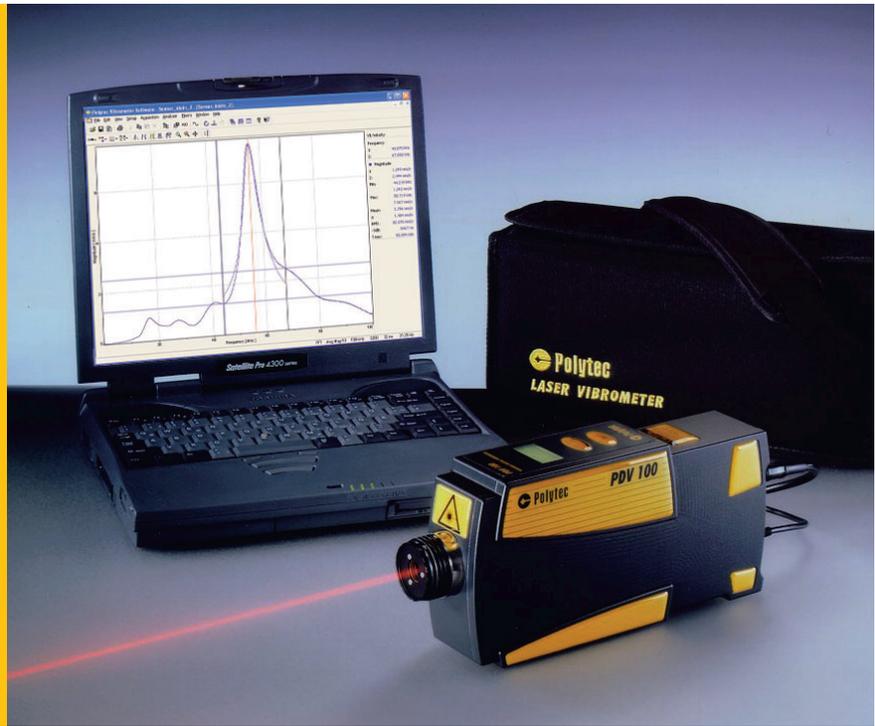

PDV-100 with transportation bag and laptop based signal-processing.

**Working with the PDV-100 is easy**  
Vibration measurements are made easy with the PDV-100. After focusing the laser beam on the vibrating object the measurement range is set via only two push buttons. An illuminated liquid crystal display shows the selected range, the amount of light returning to the PDV-100, and, if applicable, velocity over-range and low-battery warnings. Selectable high and low pass frequency filters condition the velocity signal to suppress low-frequency background vibrations or unwanted high-frequency signals. The analog velocity output interfaces to conventional analog signal processing and recording equipment. The digital velocity signal uses a transmission method proven in digital audio technology. It interfaces to digital inputs of modern recording devices or signal

analyzers without any loss of accuracy. Available accessories include the PDV-BS transportation bag with integrated lithium ion batteries for nominal five hours operation time and VIB-A-TXX series tripods for firm mounting of the PDV-100 during critical measurements.


## Features

- Non-contact velocity measurement in the frequency range 0 to 22 kHz
- 3 velocity ranges for highest resolution
- Digital signal processing
- Analog and digital signal outputs
- Variable working distance from 0.1 m up to 30 m
- Eye-safe visible laser
- Lightweight, ergonomic and rugged design, hermetic housing
- Low power consumption (batteries, wide voltage range AC mains adapter)

## Advantages of digital signal processing

The PDV-100 digital signal processing provides superior performance:

- Excellent velocity resolution
- Outstanding measurement linearity and accuracy
- Demodulation principle independent of aging and environmental influences
- Unequalled long-term calibration stability
- Digital low pass output filters with excellent properties
- Digital signal interface to data storage or processing guarantees data accuracy and minimizes EMC interference

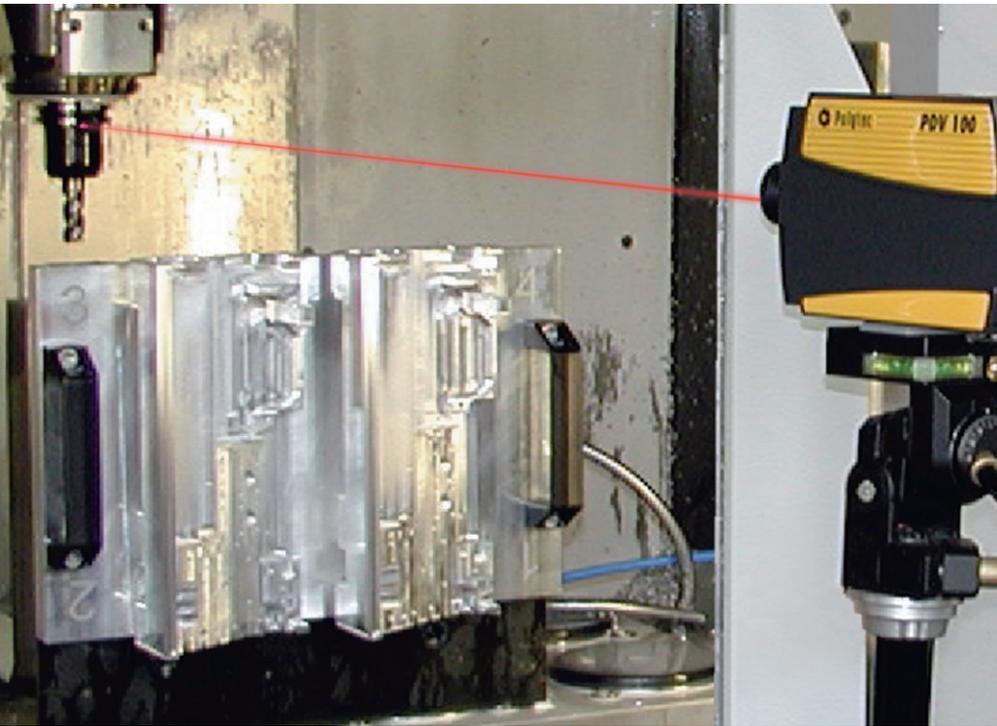

Predictive maintenance vibration measurements of machinery.

### A reliable tool for many applications


If you need a portable multi purpose non-contact vibration measurement system the PDV-100 is the ideal solution. In combination with lightweight signal processing equipment and the PDV-BS transportation bag providing power, machinery vibrations, difficult to access or hazardous objects can conveniently be measured.

The PDV-100 is designed for non-contact vibration measurements where mobility and durability are important:

- Predictive maintenance of machinery
- Operating vehicles, trains or airplanes
- Buildings, bridges or other large outdoor structures
- Multi purpose field testing
- Scientific expeditions

### PDV-100 standard and optional accessories

Included with PDV-100 are AC/DC power adapter (100 – 240 V AC, 50/60 Hz) with connecting cable, transportation bag,

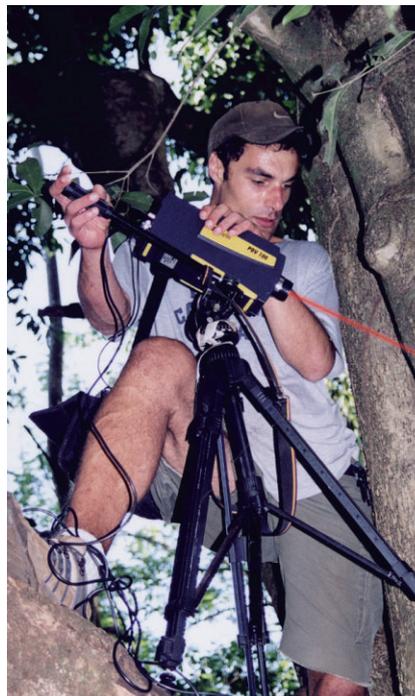

Scientific expedition using PDV-100 for vibration measurement of bees in South America jungle (Photo credit: Jarau/Hrncir, Institute of Zoology, Dept. of Neurobiology, Vienna University, Austria).



PDV-100 with transportation bag PDV-BS.

digital interface (S/P-DIF) cable (Triax/RCA), 1 sheet of reflective tape.

### Optional

- PDV-BS battery supply kit with transportation bag. Integrated lithium ion battery set (rechargeable), battery charger (100–240 V AC, 50/60 Hz) with mains cable and switching box. Weight and dimensions (including PDV-100): 4.4 kg, 370 mm x 160 mm x 150 mm
- PDV-DC cable for operating PDV-100 from a 12 V vehicle power outlet or cigarette lighter socket
- VIB-A-T04 Tripod with pan/tilt head
- VIB-A-T05 Tripod with geared pan/tilt head
- VIB-A-T06 Tripod extra tall with pan/tilt head



## PDV-100 Technical Data

General Specifications			
Decoder type	DSP velocity decoder, 3 measurement ranges		
Frequency range	0 ... 22 kHz (digital output); 0.5 Hz ... 22 kHz (analog output)		
Measurement ranges	3		
Full scale peak <sup>1)</sup> (mm s <sup>-1</sup> )	20	100	500
Scaling factor (mm s <sup>-1</sup> /V)	5	25	125
Velocity resolution <sup>2)</sup> (µm s <sup>-1</sup> /√Hz)	<0.02	<0.02	<0.1
Maximum acceleration (m s <sup>-2</sup> )	2,760	13,800	69,000
Working distance <sup>3)</sup>	0.1 m ... ~30 m		
Laser safety	Eye-safe class II visible HeNe laser		

<sup>1)</sup> Adjustable via the display.

<sup>2)</sup> The resolution is defined as the signal amplitude (rms) at which the signal-to-noise ratio is 0 dB in a 1 Hz spectral bandwidth (RBW), measured on 3M Scotchlite® tape.

<sup>3)</sup> The maximum stand-off distance depends on the surface properties of the object.

Output Signals	
<b>Analog velocity output</b>	
Output voltage swing	±4 V (24 bit DAC)
Frequency range	0.5 Hz...22 kHz
Dynamic range <sup>1)</sup>	> 90 dB
Calibration accuracy	±1 % (20 Hz...22 kHz)
<b>Digital velocity output</b>	
Electrical S/P-DIF interface <sup>2)</sup>	24 bit, 48 kSa/s
Frequency range	0...22 kHz
Calibration accuracy	±0.2 % (0.05 Hz...22 kHz)
<b>Output filter</b>	
Digital low pass filter (FIR type)	1, 5, 22 kHz (-0.1dB), roll-off >120 dB/dec
Analog high pass filter	100 Hz (-3 dB), roll-off -60 dB/dec

<sup>1)</sup> Defined as spurious free dynamic range (SFDR).

<sup>2)</sup> S/P-DIF: Sony/Philips Digital Audio InterFace.

Housing and Power	
Dimensions L x W x H	300 mm x 63 mm x 129 mm (11.8 in x 2.5 in x 5.1 in)
Weight	~2.6 kg (~5.7 lbs)
Protection rating	IP 64 (dust and spray water protected)
Power	12 V DC, max. 15 W
Operating temperature	+5 °C...+40 °C (41 °F...104 °F)
Storage temperature	-10 °C...+65 °C (14 °F...149 °F)
Relative humidity	max. 80%, non-condensing
Display	LCD, 3-line, with background lighting
Battery Kit PDV-BS	Rechargeable Li-Ion battery for min. 4 hours operation time

Compliance with Standards	
Electrical safety	IEC/EN61010
EMC	IEC/EN61326
Laser safety	IEC/EN60825-1



Laser Radiation  
Do not stare into beam  
Class 2 Laser Product  
According to IEC/EN 60825-1 (2008)  
Complies with 21 CFR 1040.10 and  
1040.11 except for deviations pursuant to  
Laser Notice no. 50, dated 24 June 2007  
P ≤ 1 mW/cw; λ = 633 nm

### Polytec GmbH (Germany)

Polytec-Platz 1-7  
76337 Waldbronn  
Tel. +49 7243 604-0  
Fax +49 7243 69944  
info@polytec.de

### Polytec France S.A.S.

Bâtiment Orion – 1<sup>er</sup> étage  
39, rue Louveau  
92320 Châtillon  
Tel. +33 1 496569-00  
Fax +33 1 57214068  
info@polytec.fr

### Polytec Ltd. (Great Britain)

Lambda House, Batford Mill  
Harpenden, Herts AL5 5BZ  
Tel. +44 1582 711670  
Fax +44 1582 712084  
info@polytec-ltd.co.uk

### Polytec Japan

Arena Tower, 13<sup>th</sup> floor  
3-1-9, Shinyokohama,  
Kohoku-ku, Yokohama-shi,  
Kanagawa, 222-0033  
Tel. +81 45 478-6980  
Fax +81 45 478-6981  
info@polytec.co.jp

### Polytec, Inc. (USA)

North American Headquarters  
16400 Bake Parkway  
Suites 150 & 200  
Irvine, CA 92618  
Tel. +1 949 943-3033  
Fax +1 949 679-0463  
info@polytec.com

Central Office  
1046 Baker Road  
Dexter, MI 48130  
Tel. +1 734 253-9428  
Fax +1 734 424-9304

East Coast Office  
25 South Street, Suite A  
Hopkinton, MA 01748  
Tel. +1 508 417-1040  
Fax +1 508 544-1225