

## LSV-2000 MID

Whenever goods are sold by length in the EU they have to be measured using calibrated machinery. Laser Surface Velocimeters LSV MID are certified according to 2014/32/EU (Measuring Instrument Directive). They optimize the manufacturing and increase the output by providing reliable measurements.

Due to the highly precise, non-contact measurement principle, the LSV Laser Surface Velocimeter eliminates common problems of traditional contact-wheel measurement methods such as damage to delicate surfaces, slippage and thermal expansion on almost any surface.

LSV MID consist of the sensor head LSV-2000 MID and the controller LSV-E-112 MID with an integrated touch-screen.



### Highlights

- Easy process integration thanks to flexible interface concept
- Certified length measurement according to MID 2014/32/EU
- Determines direction of motion and standstill
- Easy operation by touchscreen
- Robust sensor technology (IP 66, 67)
- Application-specific accessories (optional cooling, air purge, thermo-protective housing etc.)

## LSV-2000 MID

Speed and length measurement  
for calibrated machines

Datasheet



# Technical data



## Metrological Specifications



Nominal working distance [mm]	300	500	700	1000	1500
Depth-of-field [mm]	±60	±60	±70	±70	±70
Speed range	-3000 ... 0 ... +3000 m/min				
Max. Acceleration [m/s <sup>2</sup> ]	300				
Measurement units	mm/s, m/min or m (selectable)				
Accuracy	<0.05 % of reading <sup>1</sup>				
Repeatability	<0.02 % of reading <sup>1</sup>				
Measurement modes	External Trigger, Cut Mode, Material Detect				
Interfaces	<ul style="list-style-type: none"> <li>■ Ethernet</li> <li>■ Encoder</li> <li>■ 24 V Status-I/O</li> </ul>				
Controller	Panel-PC with 7"-Touchscreen <ul style="list-style-type: none"> <li>■ integrated in terminal box</li> <li>■ display of measurement values</li> <li>■ resolution 800 x 400</li> </ul>				
Data storage period	min. 90 days according to requirement MID 2014/32/EU				

<sup>1</sup> Under controlled conditions

## Optics Specifications

Wavelength	650 ... 700 nm (visible laser beam)
Laser power	max. 25 mW
Laser class	3B
Beam cross section	2 x 4 mm

General Specifications	Sensor Head	Controller
Dimensions (L x W x H)	300 x 120 x 110 mm (see drawing 1)	434 x 300 x 195 mm (see drawing 2)
Weight	4.3 kg	7.4 kg
Power consumption	24 V DC / max. 15 W, Power supply by controller	100 ... 240 VAC, +/- 10 %
Operating temperature	0 ... 40°C acc. to 2014/32/EU (MID)	
Relative humidity	max. 80 %, non-condensing	



Compliance with Standards	Sensor Head	Controller
Protection class	IP66 and IP67 (according to EN 60529)	IP65 (according to DIN EN 60529)
Mechanical shock reliability	10g according to EN 60068-2-29 (IEC 68-2-29)	-
Vibration reliability	according to EN 60068-2-6 (IEC 68-2-6)	-

MID Conformity	
Accuracy class	I, II, III
Tolerance	±0.125 %
Min. length	0.4 m 0.1 m (at reduced speed range -750 ... 0 ... +750 m/min)
Max. length	100.000 m
Certification	2014/32/EU

## Accessories



### Air wipe with quick-exchange window

A front-mounted, aerodynamically optimized air wipe unit keeps the sensor's optical window free of dust and steam. For cleaning or replacement, the quick release window can be easily exchanged.



### Mounting platform

The 3-axis adjustable mounting platform simplifies the precise alignment of the LSV sensor in relation to the measurement object. When mounting the LSV in a cooling housing, a suitable mounting platform is available.




### Cooling plate


The cooling plate keeps the sensor in its operational temperature range, even under hot ambient conditions.

### Further accessories

Thermo-protective housing, air-amplifier, measurement frame installation kit, beam protective sleeve, cable protection, air preparation unit

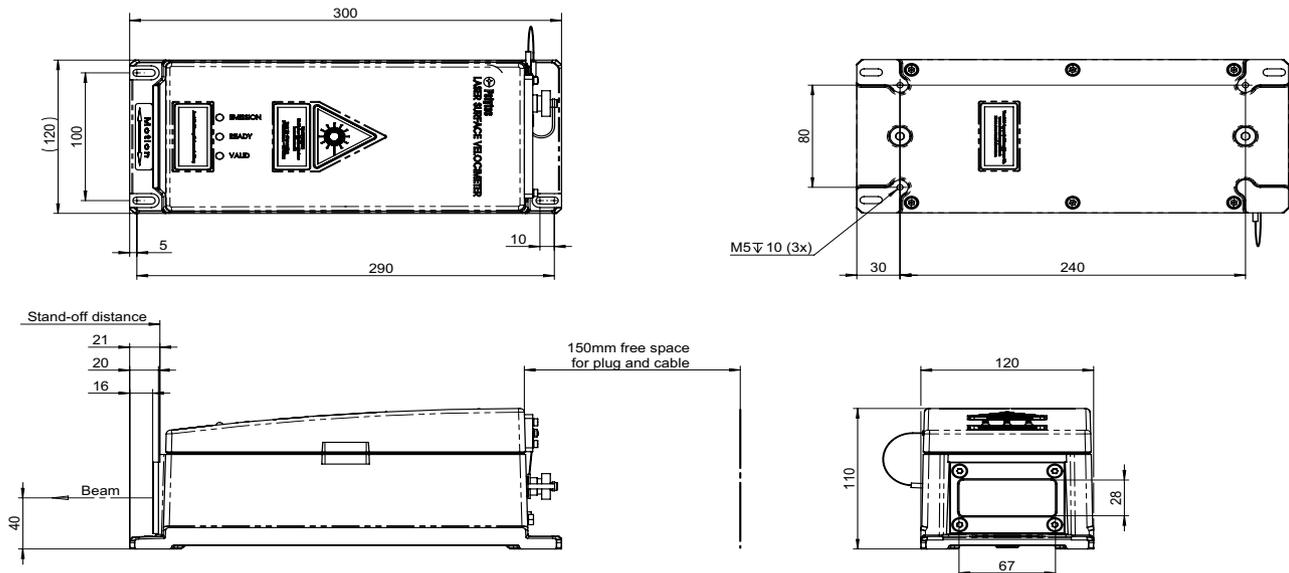

Drawing 1

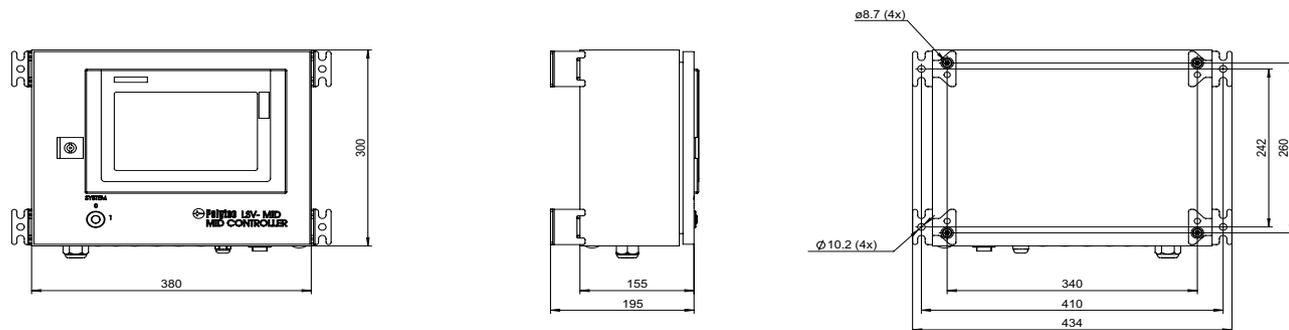

Drawing 2

### More Information

For more information please contact your Polytec application/sales engineer or visit the LSV homepage [www.velocimeter.us](http://www.velocimeter.us) and [www.velocimeter.co.uk](http://www.velocimeter.co.uk).

## Shaping the future since 1967

High tech for research and industry.  
Pioneers. Innovators. Perfectionists.

Find your Polytec representative:  
[www.polytec.com/contact](http://www.polytec.com/contact)

**Polytec GmbH · Germany**  
Polytec-Platz 1-7 · 76337 Waldbronn

[www.polytec.com](http://www.polytec.com)

