

Scalable Automatic Modal Hammer SAM

To achieve consistent transfer functions in experimental modal tests, an excitation source with repeatable force level is key. Compared to manual modal hammers, the Scalable Automatic Modal Hammer SAM meets this

requirement. Its unrivalled reproducibility perfectly matches Scanning Laser Doppler Vibrometers. Two models featuring different force ranges allow for excitation of small and large structures.



Highlights

- Repeatable excitation avoids double hits
- Precise force level control enables structural linearity checks
- Reproducible position and angle for consistent transfer functions
- Bandwidth > 20 kHz for light-weight structures
- Force levels up to 2200 N also excite large structures
- Adjustment of the operational hit angle to excitation from all directions


Scalable Automatic Modal Hammer SAM

Precise Excitation without mass-loading

Datasheet



Technical Data

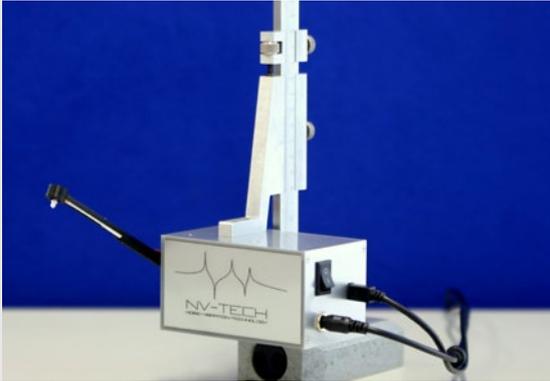

Scalable Automatic Modal Hammer type SAM1

Tripod mountable actuator for sample excitation in experimental modal analysis and acoustic quality assurance with force levels up to 200 N. The software controlled stepper motor allows for a high definition control of all relevant parameters and the travel of the hammer arm featuring the integrated force transducer.

General specifications

- Excitation bandwidth: > 20kHz¹
- Max. excitation force: 200 N
- Output force signal: BNC
- Configuration: SAM-GUI via USB interface
- Weight: 0.5 kg/1.1 lbs
- Operating temperatures: 0 ° ... 50 °C/32 ... 122 °F
- Power supply: 110 - 230 V/50 - 60 Hz (incl. AC adaptor)

¹ value depends on sample

Accessories included

- Instrumented ICP® Impact Hammer with integrated force transducer, mass 4.8 g/0.17 oz for a max force of 200 N, sensitivity 22.5 mV/N (100 mV/lbf)
- Exchangeable tips and extender mass (1.25 g/0.044 oz)
- Configured connection cable for force sensor, BNC connector
- AC adaptor
- Stand for height adjustment
- Storage case for all components and the optional stand
- NV-TECH SAM-GUI standard software



Metrological Specifications SAM1


Sensitivity ($\pm 20\%$) ²	22.5 mV/N (100 mV/lbf)
Measurement range	200 N _{pk} (45 lbf _{pk})
Non-Linearity ³	$\leq 1\%$
Excitation voltage	20 ... 30 V _{DC}
Constant current excitation	2 ... 20 mA
Output impedance	< 100 Ω
Output bias voltage	8 ... 14 V _{DC}
Discharge time constant ³	≥ 100 s
Hammer mass	4.8 g (0.17 oz)
Head diameter	6.3 mm (0.25 in)
Tip diameter	2.5 mm (0.10 in)

² steel tip with no extender mass

³ typical

General Accessories

Adjustable magnetic stand and precision adaptor for SAM1

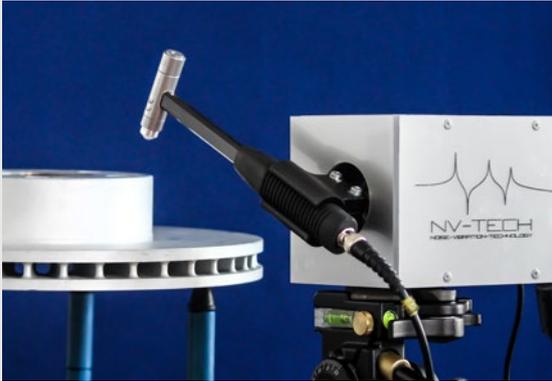

Scalable Automatic Modal Hammer type SAM2

Tripod mountable actuator for excitation of larger samples in experimental modal analysis and acoustic quality assurance with force levels up to 2200 N. The software controlled stepper motor allows for a high definition control of all relevant parameters of the impact of an instrumented modal hammer.

General specifications

- Excitation bandwidth: > 10kHz¹
- Max. excitation force: 2200 N
- Configuration: SAM-GUI via USB interface
- Weight: 2.8 kg/6.2 lbs
(actuator only)
- Operating temperatures: 0 ° ... 50 °C/32 ... 122 °F
- Power supply: 110 - 230 V/50 - 60 Hz
(incl. AC adaptor)

¹ value depends on sample

Accessories included

- Instrumented ICP® Impact Hammer with integrated force transducer, mass 0.16 kg/0.35 lbs for a max force of 2200 N, sensitivity 2.25 mV/N (10 mV/lbf)
- Exchangeable tips and extender mass (75 g/2.6 oz)
- AC adaptor
- Manfrotto Tripod adaptor 1/4 "
- Storage case for all components
- NV-TECH SAM-GUI standard software

Metrological Specifications SAM2	
Sensitivity (±20%)	2.25 mV/N (10 mV/lbf)
Measurement range	± 2224 N _{pk} (± 500 lbf _{pk})
Non-Linearity	≤ 1 %
Excitation voltage	20 ... 30 VDC
Constant current excitation	2 ... 20 mA
Output impedance ²	< 100 Ω
Output bias voltage	8 ... 14 VDC
Discharge time constant ²	≥ 2,000 s
Hammer mass	0.16 kg (0.34 lb)
Head diameter	1.57 cm (0.62 in)
Tip diameter	0.63 cm (0.25 in)

² typical





Compliance with Standards

Electrical safety	2014/35/EU Low Voltage Directive
EMC	89/336/EEG Directive of electromagnetic compatibility



SAM-GUI Software

Graphical User interface for controlling SAM

System requirements: Microsoft Windows® 7 or 10; USB 2.0 interface

Software parameter	
Set Zero Position	Precise adjustment of the zero position of the hammer tip by mouse or by remote control ¹
Velocity of Excitation	Adjustment of the impact velocity
Hit Angle ¹	Limits the operational hit angle for confined spaces
Stop Angle	Parameter to avoid double hits. Adjustment of the angle at which the hammer stops before reaching its zero position.
Time Interval	Adjusts waiting time between 2 hits
Maximum number of hits ¹	Adjustment of the max. number of hits per experiment
Software functions	
Single Hit	For test measurements
Start	Start continuous operation
Stop	Cancels continuous operation
Load / Save Setting	Save and retrieve parameter settings

¹ Requires SAM-GUI PRO version

Windows® is a registered trademark of Microsoft Corp.

NV-TECH is a registered trademark of Noise-Vibration-Technology-Design. Patent pending.

ICP® is a registered trademark of PCB GROUP, INC.

 **Polytec GmbH (Germany)**
Polytec-Platz 1-7
76337 Waldbronn
Tel. +49 7243 604-0
info@polytec.de

Polytec GmbH (Germany)
Vertriebs- und Beratungsbüro
Schwarzschildstraße 1
12489 Berlin
Tel. +49 30 6392-5140

 **Polytec, Inc. (USA)**
North American Headquarters
16400 Bake Parkway
Suites 150 & 200
Irvine, CA 92618
Tel. +1 949 943-3033
info@polytec.com

Central Office
1046 Baker Road
Dexter, MI 48130
Tel. +1 734 253-9428

East Coast Office
1 Cabot Road
Suites 101 & 102
Hudson, MA 01749
Tel. +1 508 417-1040

 **Polytec Ltd. (Great Britain)**
Lambda House
Batford Mill
Harpenden, Herts AL5 5BZ
Tel. +44 1582 711670
info@polytec-ltd.co.uk

 **Polytec France S.A.S.**
Technosud II
Bâtiment A
99, Rue Pierre Semard
92320 Châtillon
Tel. +33 1 496569-00
info@polytec.fr

 **Polytec Japan**
Arena Tower, 13th floor
3-1-9, Shinyokohama
Kohoku-ku, Yokohama-shi
Kanagawa 222-0033
Tel. +81 45 478-6980
info@polytec.co.jp

 **Polytec South-East Asia Pte Ltd**
Blk 4010 Ang Mo Kio Ave 10
#06-06 TechPlace 1
Singapore 569626
Tel. +65 64510886
info@polytec-sea.com

 **Polytec China Ltd.**
Room 402, Tower B
Minmetals Plaza
No. 5 Chaoyang North Ave
Dongcheng District
100010 Beijing
Tel. +86 10 65682591
info-cn@polytec.com