


G - SERIES PHOTODIODE

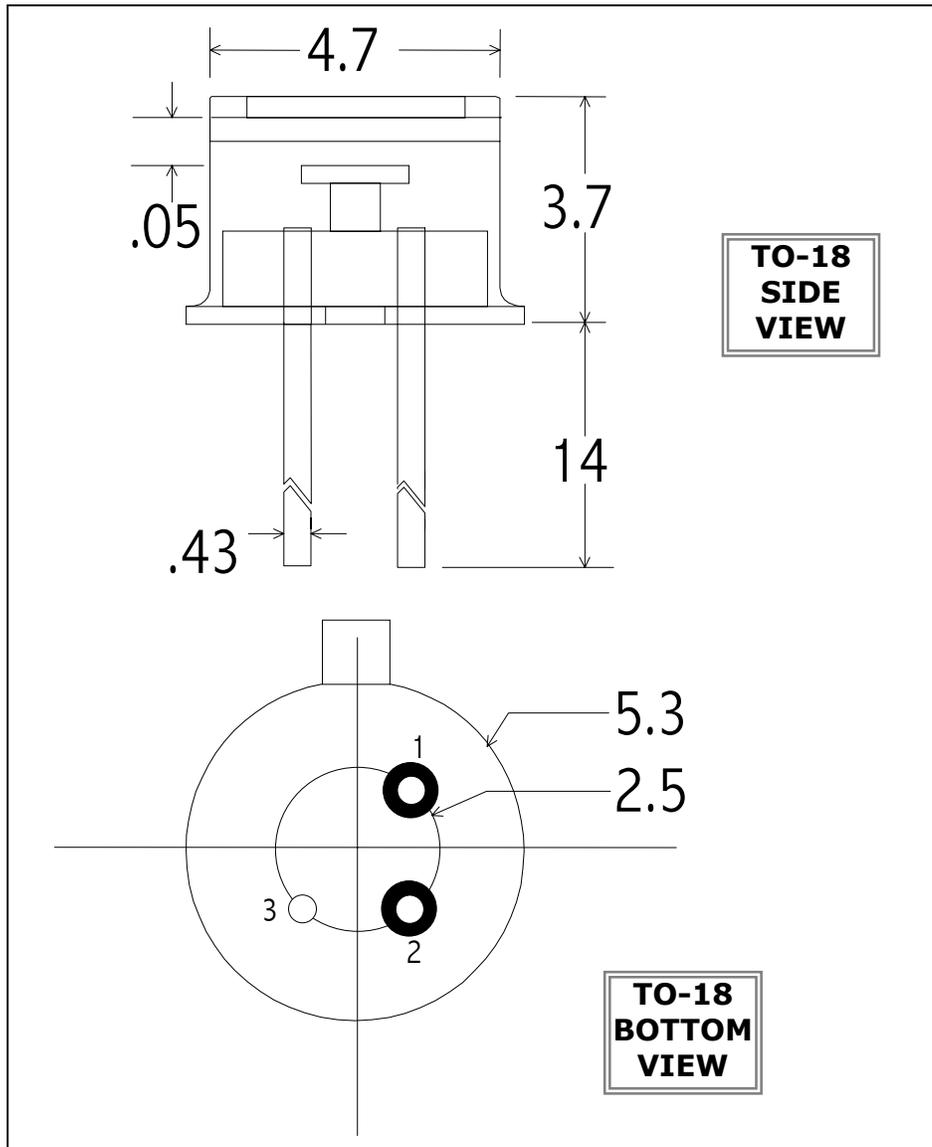

Part No: G - 010

PIN OUT

- 1 = ANODE
- 2 = CATHODE
- 3 = CASE

Note:

Dimensions in millimeters

Application Note

ELECTRO OPTICAL SYSTEMS offers room temperature germanium photodiode detectors for operation in the 0.8 - 1.8 μm spectral range. The units have state-of-the-art sensitivity and may be supported by accessories such as optical filters (longpass and bandpass), integral preamplifiers, and and fiber optic connectors. These units find applications in industrial control systems, gas analyzers, thermal sensors, and general fiber optic test instrumentation.

SPECIFICATIONS

Detector	1.0mm dia Germanium Photodiode
Operating Temperature (°C)	22
Operating Wavelength	0.8 - 1.8
Shunt Resistance (Ω) min	200k
Shunt Capacitance (pF), typ	1500
Responsivity (A/W)	0.90 @ 1.5 μm
NEP (W/Hz ^{1/2})	< 3 x 10 ⁻¹³ @ 1.5 μm