


TE - COOLED PHOTODETECTOR

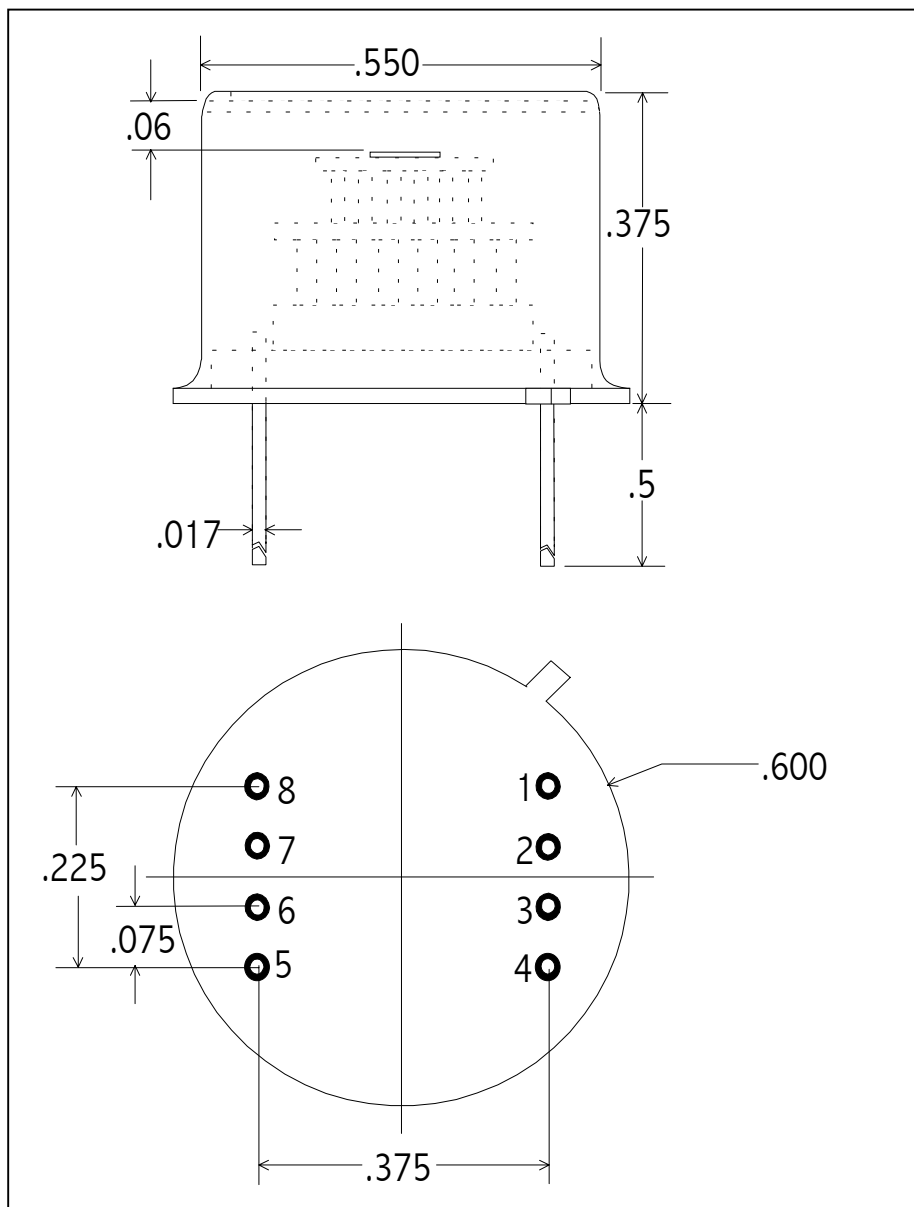

Part No:

PBS - 020 - TE2

PIN OUT

- 1 = COOLER (-)**
- 2 = THERMISTOR**
- 3 = THERMISTOR**
- 4 = COOLER (+)**
- 5 = DETECTOR**
- 6 = DETECTOR**
- 7 = NO CONNECT**
- 8 = NO CONNECT**

Note: Dimensions in inches

Operating Note

The TE cooled photodetector series consists of a high performance photodetector mounted on a thermoelectric cooler, all housed in a TO-8 package. A thermistor is mounted to the TEC's cold plate to provide a precise, reliable temperature monitor. Before operation VERIFY ELECTRICAL WIRING, else catastrophic damage may be sustained by the unit. Electrical power consumption can exceed 2.5 Watts (2V / 1.25A); therefore, this package must be suitably heat sunk. Thermal grease with secure clamping is recommended for power dissipation. Temperature levels below -45°C are possible with an optimized mechanical assembly.

SPECIFICATIONS

Detector Type	2mm x 2mm PbS Photoconductor	
Operating Temperature (°C)	22	-30
Shunt Resistance (MΩ)	0.2 – 1.0	.5 – 3.0
D* (pk, 1 kHz, 1 Hz)	1.0×10^{11}	2.5×10^{11}
Responsivity @ pk (V/W)	2×10^5	5×10^5
Thermistor Resistance (kΩ)	1.6 typ	40 typ
Cooler Current (A)	0.00	0.60 typ
Maximum Cooler Current (A)	1.25	