



KL 2500 LED

- All KL 1500 LED basic functions like wide range power supply, continuous dimming from 0 to 100% and filter slider with two positions
- 1.000 Lumens output at light guide end (light guides with active diameter of 9 mm)
- PC controllable via USB
- Connection for foot switch and remote control
- Intensity control at three sensitivities (fine, standard and coarse tuning)
- LCD display indicates brightness setting, operation mode, or error code
- Electronic shutter function
- **Approvals:**  
The KL 2500 LED is in compliance with the CE regulations (power supply CE, UL, PSE)
- Manufactured in the EU

## KL 2500 LED

*Highest performance for superior demand*

The KL 2500 LED is the performance leader in cold light sources from SCHOTT with a LED light engine. Due to its high light output and special features it complies with advanced requirements in life science and industrial applications of Stereo Microscopy and Macroscopy.

The brightness is equivalent to a 250-Watt halogene cold light source.

All advantages of LED light sources,




- no bulb changing
  - low energy consumption
  - ripple free DC illumination
  - white light (daylight)
  - no visible color temperature shift on dimming
- are combined with the main advantages of fiber optics,
- very high light intensity focused on a small field of view
  - high flexibility of light and illumination techniques
- for an outstanding price-performance ratio.

KL 2500 LED		
<b>General data</b>		
Part-No.		250 400
Dimensions (W x D x H)	(mm)/(inch)	231 x 114 x 137/9.1" x 4.5" x 5.4"
Weight	(kg)	Approx. 2.45
Cooling		Silent fan
<b>Electrical data</b>		
Operating voltage, frequency		90 – 264 V ~, 47 – 63 Hz
Input voltage	(V)	24 V
Power consumption	(VA)	Max. 80
Protection class		II
Overvoltage category		II
Diodes		Osram Ostar Compact
LED power rating	(W)	9 x 7
Average LED life time	(h)	50.000
<b>Illumination data</b>		
Luminous flux	(lm)	1.000
Color temperature	(K)	Approx. 5.600
Light control		Electrical
Active light guide diameter	(mm)/(inch)	Max. 9/Max. 0.35"
<b>Certification marks</b>		
Approvals		CE (power supply CE, UL, PSE)
EMV-class		B

Note: country specific power cord must be ordered separately!

Product improvements may result in specification or feature changes without notice.

## KL 2500 LED

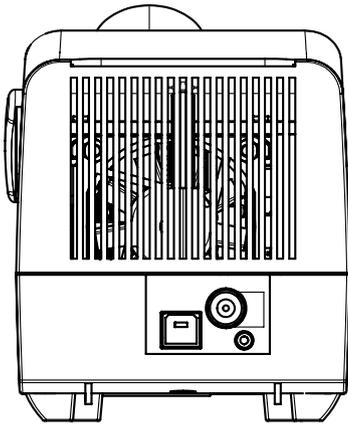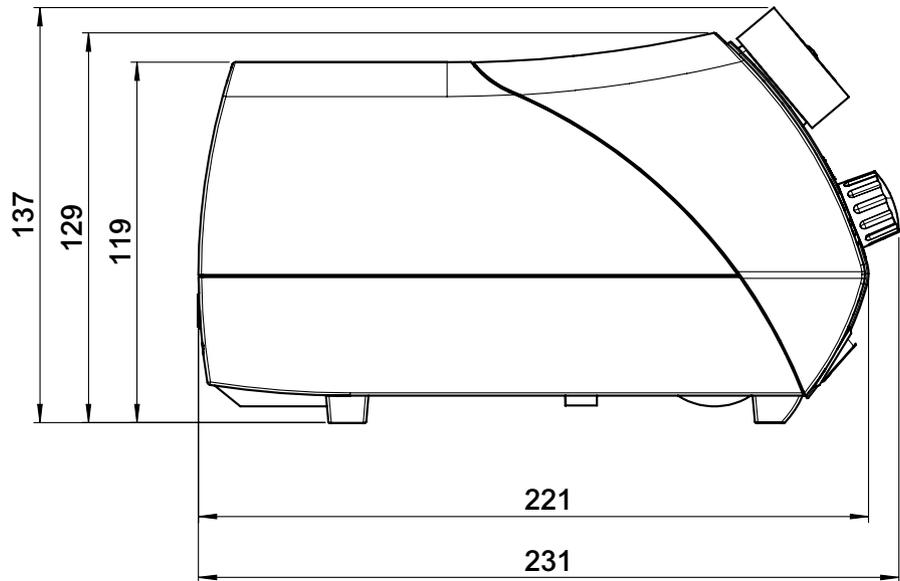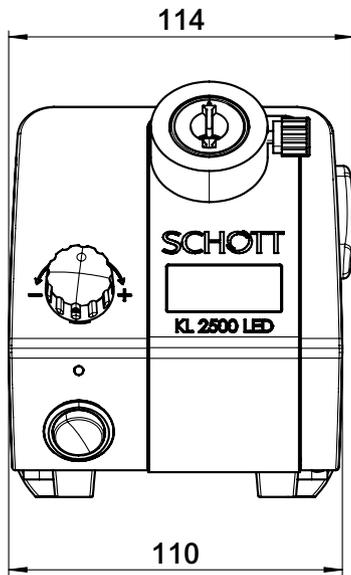

Lighting and Imaging  
**SCHOTT AG**  
Otto-Schott-Strasse 2  
55127 Mainz  
Germany

Phone: +49 (0)6131/66-7796  
Fax: +49 (0)6131/66-7850  
lightingimaging@schott.com  
www.schott.com/lightingimaging

**SCHOTT**  
glass made of ideas

For your local sales contact please visit  
[www.schott.com/lightingimaging/english/contact](http://www.schott.com/lightingimaging/english/contact)