



ACE® Remote Light Source



115 Volt ACE® Remote Light Source with EKE lamp, A20560

All the features of our universally accepted ACE® light source with the added convenience of the following:

- 6' shielded black cable provides remote intensity control, including ON/OFF.
- Positive locking, quick disconnect cable will not pull out
- CSA approved to UL spec, CE compliant to low voltage and EMC directives
- 10' shielded extension available as an option
- Modulamp assembly purchased separately
- Heavy duty, grounded metal housing
- 115 input voltage version available
- IR interference filter for cool illumination
- Full illumination on .60" active diameter input
- Solid state dimmer control
- Interchangeable Modulamp Units offer 2 positions to maximize individual lamp efficiencies.
- Choice of three, 150 watt halogen lamps - EKE, EJA, and DDL for intense, uniform illumination
- Built-in thermal shut down
- Quiet fan cooling
- Zero to full intensity
- Low housing temperature
- Detachable IEC cord



10' Extension Cord with CPC connectors, A29505

ACE® Remote Light Source

ACE® Remote Power Supply	Modulamp/lamp not included
★ A20560.115	115 V Power Supply Only
Extension Cord	
A29505	10' extension - CE and CSA Comp.

★ Made-to-order products.



EKE, DDL, and EJA lamps and Modulamp units can be purchased separately.

Options

- Infinite setting, twelve blade iris diaphragm version available to reduce intensity while maintaining color temperature.

ACE® Remote Light Source

Dimensions in () are in mm

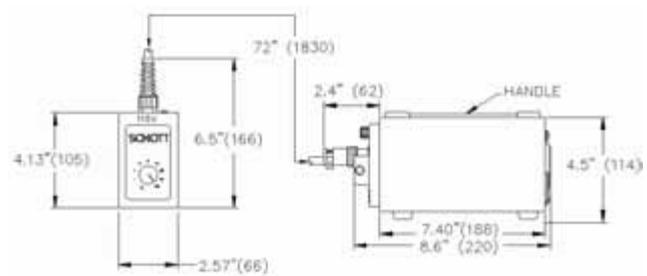

Input: 115 VAC/60 Hz, Output: 0–21 VAC shown with optional EKE modulamp sold separately.

Power Supply Specifications	
Power Consumption	190 Watts (nominal)
Output Voltage	0 - 21 VAC
Fiber Receptacle	0.72 (13.3)
Input Voltage	115 VAC / 60 Hz
Temperature Range: Operating	0° to 50°C