

Combination Goosenecks & Bundles



Combination Dual Gooseneck with Bundle, A08520

Obedient, incident illumination for space constrained applications

- The bundle sheathing is made of PVC covered metal tubing and the gooseneck is made of semi-obedient, chrome-plated metal gooseneck tubing.
- Bend radius of the chrome gooseneck tubing is 2-3" (51 - 76)*.
- The standard output ferrules accept spot lenses with or without polarizing caps. (See Accessories section of the product catalog for details.)
- Custom configurations are available. Lead time is required.
- Precise positioning of a spot of light
- Gooseneck legs placed in opposing positions create shadow-free illumination.
- Re-adjust with ease
- Dual models illuminate a workspace with a single light source.



Combination Gooseneck, Bundle, and Bracket, A08512 for Olympus SZX Series Microscopes


Combination Goosenecks & Bundles

Dimensions in () are in mm


Warning : This product is manufactured with glass fiber. Not for use in cable/hose carrier. Call SCHOTT to discuss moving cable/hose carrier applications.

Ringlight Input: Black Anodized Aluminum
Bundle Sheathing: PVC Covered Metal Tubing
Gooseneck Sheathing: Chrome Plated Steel


A08510
Combination Gooseneck and Bundle

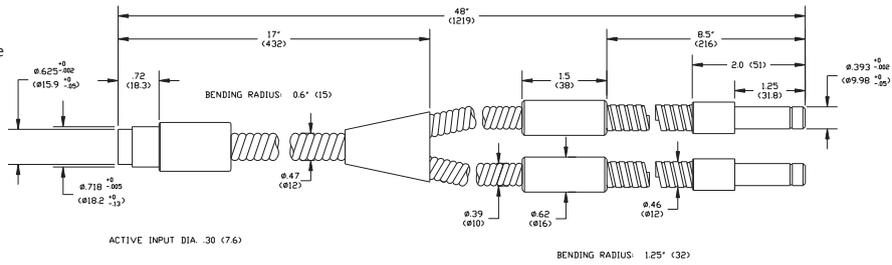

A08512
Combination Gooseneck and Bundle

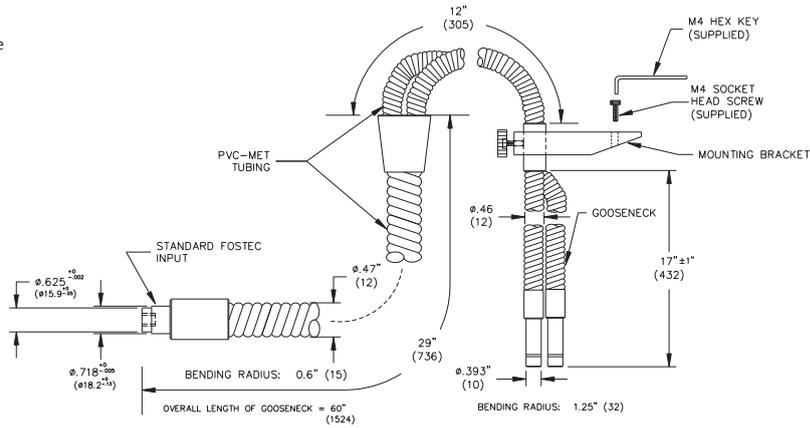

A08520 - A08520.60
Combination Gooseneck and Bundle

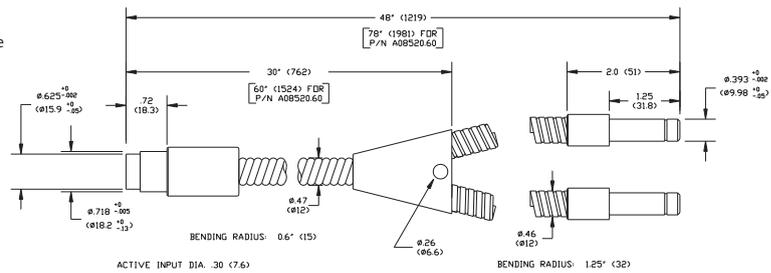

Combination Goosenecks and Bundles

Part No.	Active Input Fiber	Active Output Fiber Diameter	Bundle Tubing Diameter	Gooseneck Tubing Diameter	Bundle Length Diameter	Gooseneck Length
Combination Goosenecks and Bundle(s)						
A08510	.30" (8)*	.21" (5)	.47" (12)	.46" (12)	17" (432)	8.5" (216)
A08512	.30" (8)	.21" (5)	.47" (12)	.46" (12)	29" (737)	17" (432)
A08520	.30" (8)	.21" (5)	.47" (12)	.46" (12)	30" (762)	18" (457)
A08520.60	.30" (8)	.21" (5)	.47" (12)	.46" (12)	60" (1524)	18" (457)

Dimensions in () are in mm