




High-brightness ring lights

These ring lights are equipped with 12 high-power LEDs permitting working distances of 1 to 1.5 meters in practice, much more than standard LED lights which are usually suitable for working distances of up to 30 centimeters.

The lighting head can be equipped with lenses for light beam angles of 10, 18, 28 and 40 degrees for an ideal adjustment to different working distances and fields of views.

A clear glass diffuser is included. It's possible to choose a shower glass diffuser.

Mechanical dimensions

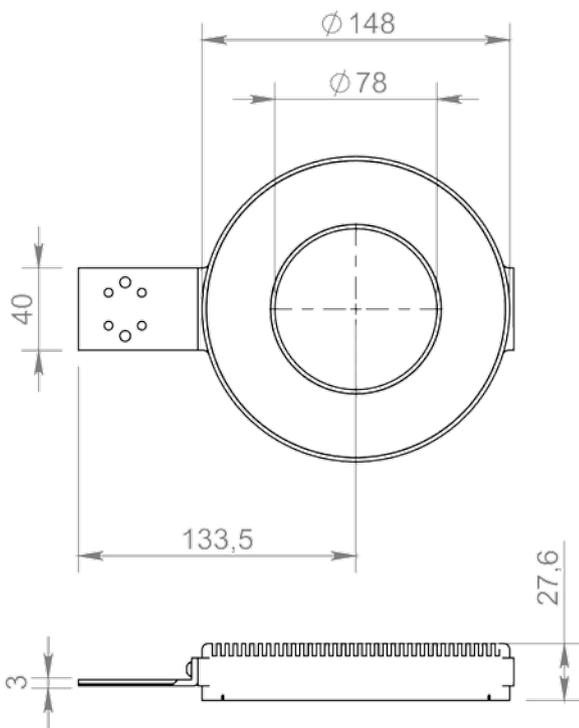

Options

- Cable length and type see "Order options"



Order information

Order number	Secondary optics	Controller ¹⁾	
		steady mode	strobe mode
FAX3 1153(10)	10°	1 A	8 A
FAX3 1153(18)	18°	1 A	8 A
FAX3 1153(28)	28°	1 A	8 A
FAX3 1153(40)	40°	1 A	8 A

¹⁾ See controller selection for details

Color information

Replace "X" in order number by one character ³⁾	Color	Wavelength
D	Red	617 nm
W	White	
B	Blue	465 nm
G	Green	520 nm

³⁾ Example for red ring light: FAD3 1153(10)