



KL 2500 LCD

- **Ease of use:** The KL 2500 LCD is supplied with a filter wheel, which accommodates up to five insert filters. Filter selection is as simple as a turn of the knob.
- **Electronic accessories,** such as remote control, RS-232 or tilt switch, can be connected to the front panel of the device enabling light source operation in difficult access areas.
- With the **modified light guide socket,** light guides up to 15-mm fiber bundle diameter can be used with optimum results. Design compatibility allows KL 1500 LCD light guides to also be used with the KL 2500 LCD.
- All other functions are identical to the KL 1500 LCD.
- **Approvals:**
The KL 2500 LCD has been approved and certified by VDE and UL (120-Volt version for U.S. and Canada) and carries the CE conformity label (230-Volt version).
- Manufactured in the EU.

KL 2500 LCD

Twice the amount of light – ideal for special applications

The KL 2500 LCD is the performance leader in halogen light sources from SCHOTT.



With its 250-Watt light reflector lamp, the KL 2500 LCD exceeds twice the amount of light given by the KL 1500 LCD. It produces many-fold the amount of light currently available from other 150-Watt devices.

Unparalleled performance of the KL 2500 LCD makes it the instrument of choice for all applications in microscopy which demand a higher light output. Where meeting macro-photography's shorter exposure requirements, light reserve for forensic and GFP fluorescence applications, the KL 2500 LCD is the right device.


KL 2500 LCD		
Type designation		General data
Dimensions (W x D x H)	(mm)/(inch)	Ca. 200 x 265 x 170/Ca. 7.9" x 10.4" x 6.7"
Weight	(kg)	Approx. 6.0
Cooling		Low-noise fan
	Part-No.	Electrical data
Operating voltage 120 volt version	250 201	100 V ~ 50/60 Hz, 120 V ~ 60 Hz
230 volt version	250 200	220 V ... 240 V ~ 50/60 Hz
Protection Class		II
Lamp type		Halogen reflector lamp Type ELC
Lamp voltage rating (V)		24
Lamp power rating (W)		250
Average lamp service life level 4	(h)	1.500
level 5	(h)	150
Illumination data		
Light flux	(lm)	1.300
Light control		Electrical and mechanical
Active light guide diam.	(mm)/(inch)	Max. 15/Max. 0.59"
Certification marks		
120 volt version		CSA (C/US)
230 volt version		CE, CSA

Product improvements may result in specification or feature changes without notice.

KL 2500 LCD

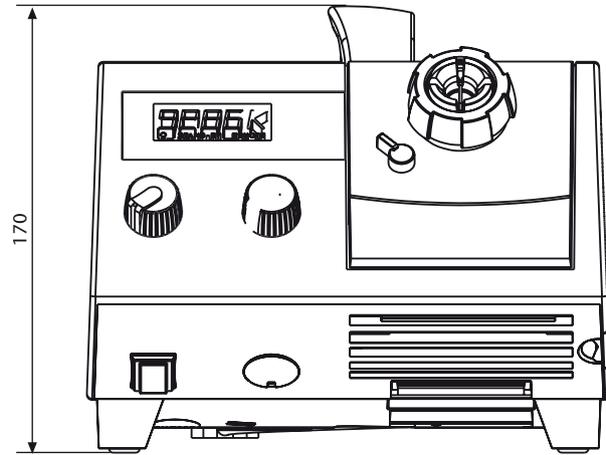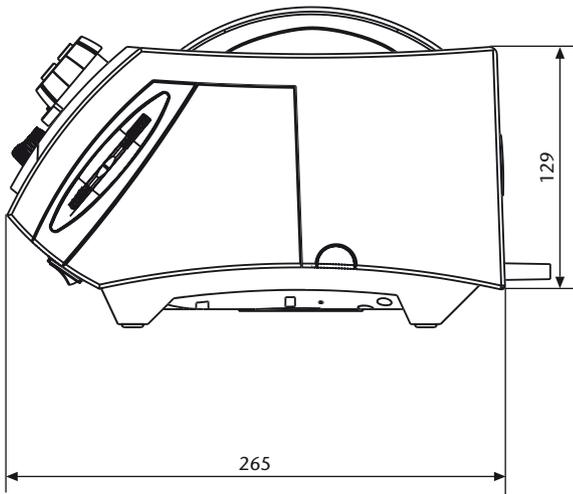

9 PIN connector for remote control or electronic accessories

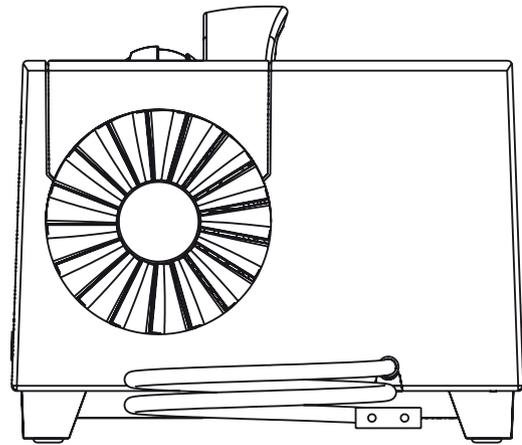

Fiber Optics
SCHOTT AG
Otto-Schott-Strasse 2
55127 Mainz
Germany

Phone: +49 (0)6131/66-7796
Fax: +49 (0)6131/66-7850
fiberoptics.info@schott.com
www.schott.com/fiberoptics

For your local sales contact please visit
www.schott.com/fiberoptics/english/contact

SCHOTT
glass made of ideas