

Polytec EC 112-L-frozen

Properties

Polytec EC 112-L-frozen is a standard one-component, pre-mixed-frozen, solvent free, heat curing epoxy resin with a long pot life and excellent electrical conductivity.

It is used for smart card application and die-bonding, in microelectronic, medical, hybrids, photovoltaic and optoelectronic applications.

Polytec EC 112-L-frozen can be cured at 95°C.

The material is optimized for screen printing application, but can be applied by dispensing or manually as well.



Processing

- The cooling during transport is assured by dry ice (-78 °C) and a temperature indicator.
- Use insulated gloves when touching any component of the packaging.
- The storage temperature of frozen adhesives should not exceed -40 °C.
- The cartridges should be opened only when they have been brought to room temperature (thawing curve see page 3).
- Store cartridges in vertical position while thawing (top down).
- Do not accelerate the thawing by hand heat or warm water (risk of air inclusions)
- Please remove condensed water before opening.
- Surfaces should be clean, thus free of dirt, grease, oil, dust or process chemicals.
- Please notice respective minimum curing temperature and time.
- For Safety information please refer to the respective Material Safety Data Sheet.

Polytec EC 112-L-frozen

Electrically Conductive Adhesive

Technical Data

Polytec EC 112-L-frozen

Properties in uncured state	Method	Unit	Technical Data
Chemical basis	-	-	Epoxy
No. of components	-	-	1
Mixing ratio (weight)	-	-	-
Mixing ratio (volume)	-	-	-
Pot life at 23°C	TM 702	h	48
Storage Stability at -40°C	TM 701	months	12
Consistency	TM 101	-	Creamy Paste
Density Mix	TM 201.2	g/cm ³	2.9
Density A-Part	TM 201	g/cm ³	-
Density B-Part	TM 201	g/cm ³	-
Type of filler	-	-	Silver
Max. particle size	-	µm	<40
Viscosity Mix 84 s ⁻¹ at 23°C	TM 202.1	mPa·s	8 000
Viscosity A-Part 84 s ⁻¹ at 23°C	TM 202	mPa·s	-
Viscosity B-Part 84 s ⁻¹ at 23°C	TM 202	mPa·s	-

Properties in cured* state	Method	Unit	Technical Data
Color	TM 101	-	Silver
Hardness (Shore D)	DIN EN ISO 868	-	85
Temperature resistance continuous	TM 302	°C	-55 / +200
Temperature resistance short term	TM 302	°C	-55 / +300
Degradation Temperature	TM 302	°C	+350
Glass Transition Temperature (T _g)	TM 501	°C	75
Coefficient of thermal expansion (<T _g)	ISO 11359-2	ppm	21
Coefficient of thermal expansion (>T _g)	ISO 11359-2	ppm	94
Thermal conductivity	-	W/m·K	1.2
Specific volume resistivity	DIN EN ISO 3915	Ω·cm	2 – 4 · 10 ⁻⁴
Electrical conductivity	DIN EN ISO 3915	S/m	-
Elasticity modulus	TM 605	N/mm ²	4 700
Tensile Strength	TM 605	N/mm ²	29
Lap shear strength (Al/Al)	TM 604	N/mm ²	8.0
Elongation at break	TM 605	%	0.7
Water absorption 24 h, 23°C	TM 301	%	0.3

*The above data has been determined with samples cured at 150°C. Please notice, by varying the curing temperature these properties can be influenced to some extent.

Polytec EC 112-L-frozen

Curing*	Method	Unit	Technical Data
Minimum curing temperature		°C	95
Curing time at 100°C		min	60
Curing time at 120°C		min	15
Curing time at 150°C		min	10
Curing time at 180°C		s	40


*Curing temperatures refer to the temperature in the respective bond line. When choosing the respective curing conditions, the time needed to heat the substrate has to be considered. Depending on the type of heat source (convection oven, hot stamp, heating plate) the heat input may vary.

Standard pack size:

3 cc*/ 8 g, 5 cc*/ 13 g,
10 cc*/ 26 g, 30 cc*/ 78 g

Customized Packaging

*:EFD-Cartridges

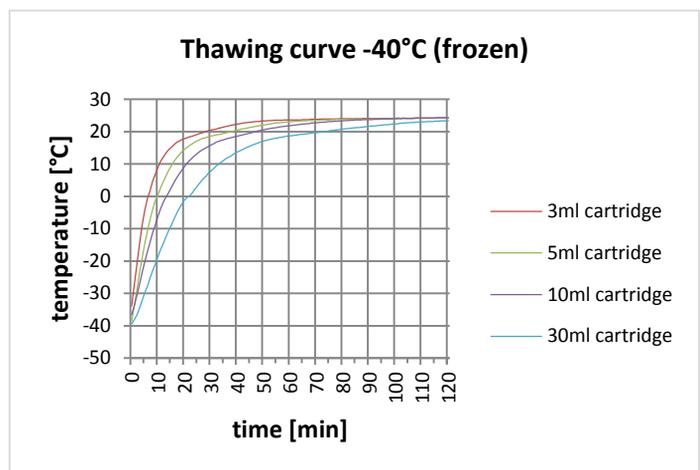

Please note:

The above listed information are typical data based on tests and are believed to be accurate. Polytec PT makes no warranties (expressed or implied) as to their accuracy. The above listed data do not constitute specifications. The processing (in particular the cure conditions) of the material, the process control and the variety of different applications at various customers are not under Polytec PT's control. Therefore Polytec PT will not be liable for concrete results in any specific application or in any connection with the use of this product. In particular the cure conditions do have a major effect on the properties of the cured material. Therefore it is highly recommended to keep the cure schedule – once established - under tight control. With the release of this data sheet all former data sheets will be null and void.

Subject to alteration.

Polytec PT GmbH
Polymere Technologien
Ettlinger Straße 30
76307 Karlsbad
Germany
Tel. +49 (0) 7243 604-4000
Fax +49 (0) 7243 604-4200
info@polytec-pt.de
http://www.polytec-pt.de

Polytec France S.A.S.
TECHNOSUD II
Bâtiment A
99, Rue Pierre Semard
92320 Châtillon - France
Phone. +33 (0)1 49 65 69 00
Fax +33 (0)1 57 19 59 60
info@polytec.fr
http://www.polytec-pt.com

Polytec South-East Asia Pte Ltd
Blk 4010 Ang Mo Kio Ave 10
#06-06 Techplace I
Singapore 569626
Tel. +65 6451 0886
Fax +65 6451 0822
info@polytec-sea.com
http://www.polytec-pt.com