



MINIATURE SURFACE-MOUNT BIAS-TEE

BT-0014SM

Features

- Frequency Range: 500 kHz to 14 GHz
- Frequency Range with [External Coil](#): 5 kHz to 14 GHz
- DC Current 500 mA
- Miniature Surface Mount Package
- [Reflow Solderable](#)




Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system

Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	5 MHz to 14 GHz		0.5	1.5
	500 kHz to 5 MHz		1	6
DC Current (mA)	500 kHz to 14 GHz			500
DC Resistance (Ohms)			<1.5	
DC Port Isolation (dB)			40	
DC Voltage Maximum (V)				30
RF Power Maximum (W)				1

Model ¹	Description
BT-0014SM-1 BT-0014SM-2	500 kHz - 14 GHz Bias Tee, Surface Mount

¹Default is -2 when not specified.

Connectorized evaluation fixtures available. Consult factory.

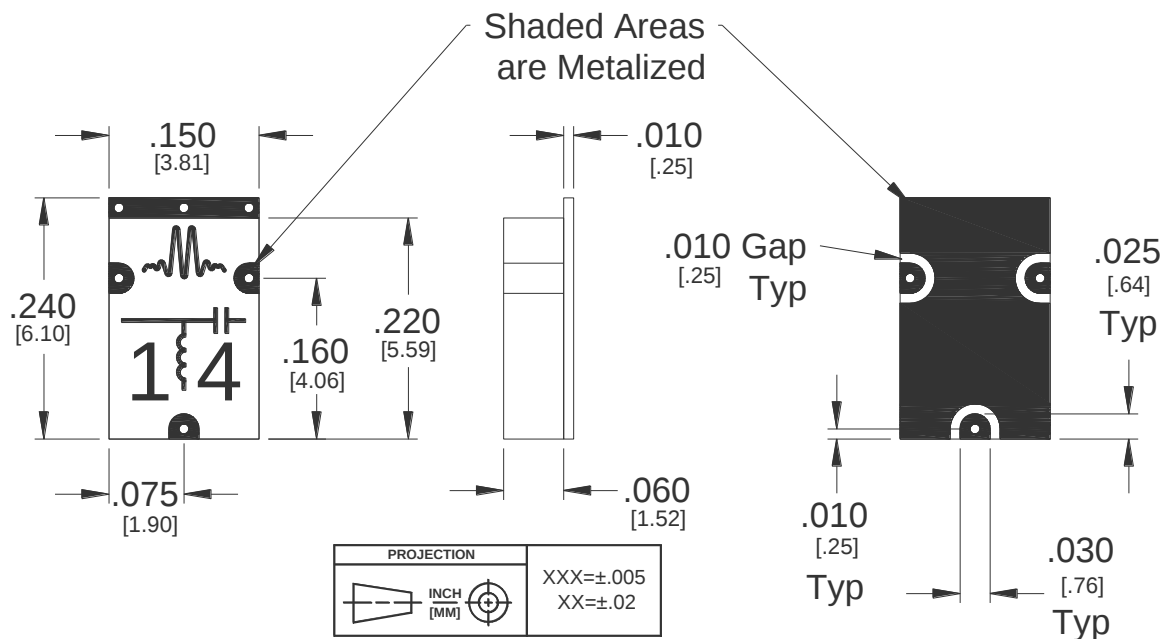

Substrate material is 10-mil thick Rogers 5880 or Taconic TLY-5, ½ Oz Electrodeposited Cu.

I/O Pads & Ground Plane Finish is 100-300 μ-inches 60/40 Pb/Sn Solder Plate, over Cu.

See <http://www.markimicrowave.com/menus/appnotes/an-bt-sm-pcb.pdf> for suggested PCB layout.

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com






MINIATURE SURFACE MOUNT BIAS TEE

Page 2


BT-0014SM

Input 500 kHz to 14 GHz

Typical Performance

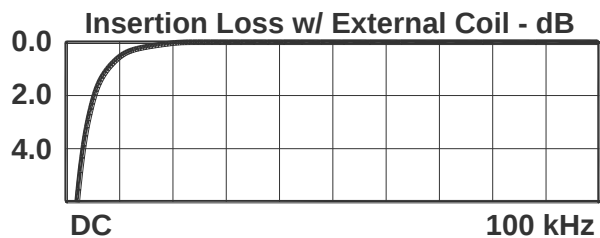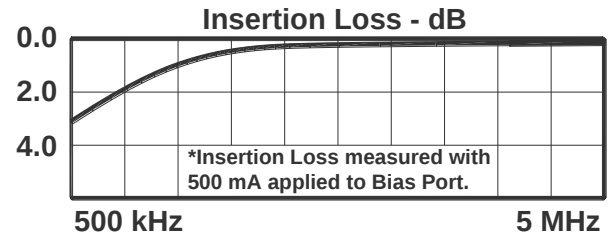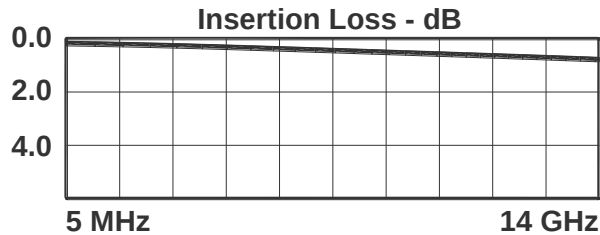

BT-0014SM-1



BT-0014SM-2

Port Configuration Options

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com