



## RVLDM1050 Series DRIVER

- Remote Variable Intensity Control - ~10% to 100%
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode


### **ELECTRICAL:**

Input Voltage: 24 VDC -0.5 / +4V  
Input Current: 1.2 Amp Max  
Connection: Screw terminals



### **RVLDM1050 is compatible with the following lights:**

SP5.5 – All Colors  
LL117.25 – All Colors

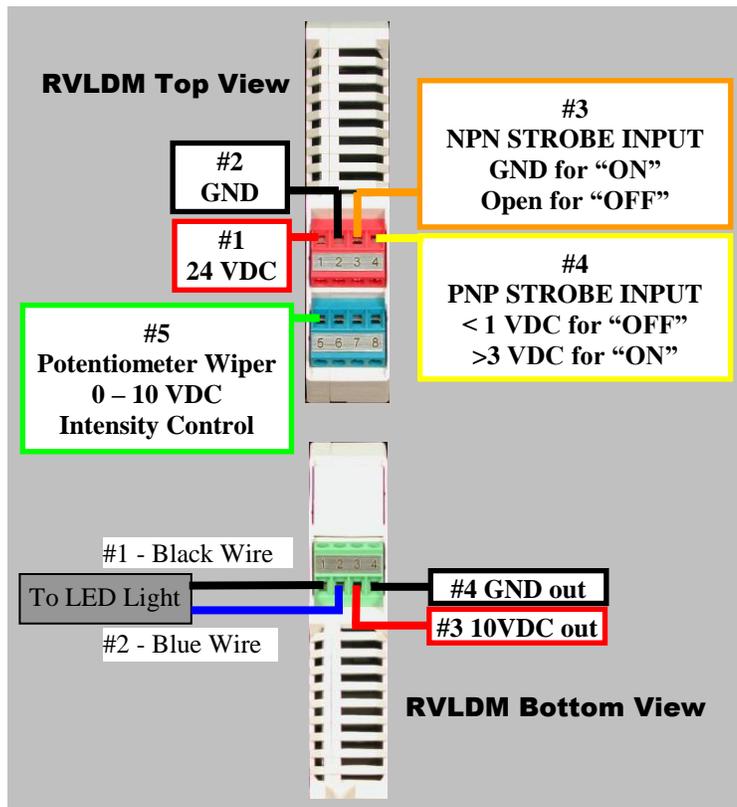

### NOTE:

Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant "ON" state.


Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

Note: White, Brown and Green wires are not used on RVLDM1050 Driver

### **Warning!!!**

**USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS.  
DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!**

# Wiring Block Diagram

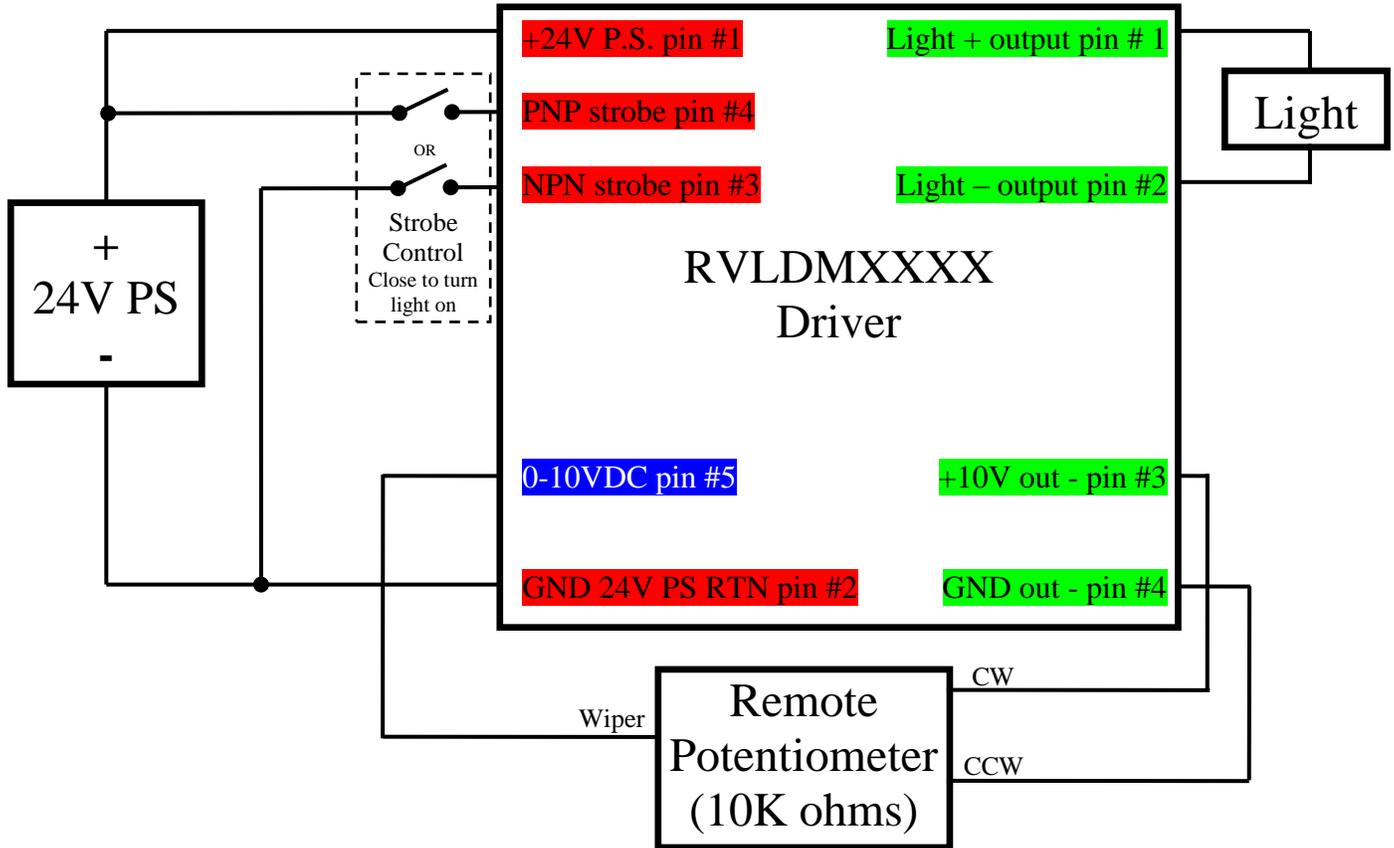

Rev. Date: 2013-02-13