

## C20-0226

### DIRECTIONAL COUPLER

## DEVICE OVERVIEW

### General Description

The C20-0226 is a broadband 2-26.5 GHz, 20 dB directional coupler. The multisection tri-plate stripline design exhibits excellent coupling flatness and VSWR at all ports. Custom designs are also available, contact the factory for details.

[Download s-parameters here](#)


### Features

- Broadband Performance
- Excellent Coupling Flatness
- High Directivity
- Low VSWR

### Applications

N/A

### Functional Block Diagram



### Part Ordering Options

| Part Number | Description         | Package | Packing Size | Green Status | Product Lifecycle | Export Classification |
|-------------|---------------------|---------|--------------|--------------|-------------------|-----------------------|
| C20-0226    | DIRECTIONAL COUPLER | -       | -            | RoHS         | Released          | EAR99                 |

## Table Of Contents

- **Device Overview**
  - General Description
  - Features
  - Applications
  - Functional Block Diagram
- **Revision History**
- **Specifications**
  - Absolute Maximum Ratings
  - Package Information
  - Electrical Specifications
- **Mechanical Data**
  - Outline Drawing

## Revision History

| Revision Code | Revision Date | Comment                      |
|---------------|---------------|------------------------------|
| K             | 2020-04-01    | Updated Direct Line IL specs |

## Specifications

### Absolute Maximum Ratings

| Parameter         | Maximum Rating | Unit |
|-------------------|----------------|------|
| RF Power Handling | 50             | W    |

### Package Information

| Parameter  | Details | Rating           |
|------------|---------|------------------|
| Weight     | -       | 45g              |
| Dimensions | -       | 66.04 x 13.97 mm |

### Electrical Specifications


Specifications guaranteed when operated in a 50Ω system.

| Parameter                       | Test Conditions | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ  | Max | Unit |
|---------------------------------|-----------------|-------------------------|-------------------------|-----|------|-----|------|
| Mean Coupling                   | -               | 2                       | 26.5                    | -   | 20   | -   | dB   |
| Direct Line Insertion Loss      | DC-26.5         | -                       | -                       | -   | -    | 1.2 | dB   |
| Amplitude Flatness <sub>1</sub> | -               | 2                       | 26.5                    | -   | 0.75 | 1.5 | dB   |
| Directivity                     | -               | 2                       | 20                      | 15  | 22   | -   | dB   |
| Directivity                     | -               | 20                      | 26.5                    | 13  | 18   | -   | dB   |
| VSWR                            | -               | 2                       | 20                      | -   | 1.25 | 1.4 | -    |
| VSWR                            | -               | 20                      | 26.5                    | -   | -    | 1.5 | -    |
| Weight                          | -               | -                       | -                       | -   | 45   | -   | g    |

<sup>[1]</sup> Deviation from average coupling.

**Mechanical Data**

**Outline Drawing**

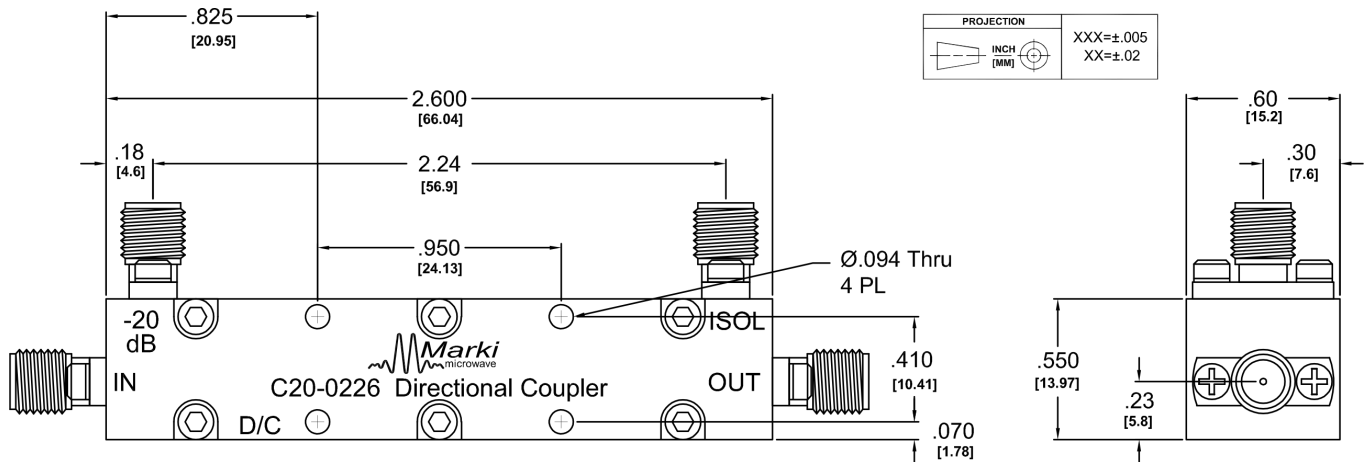

#### **DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2020, Marki Microwave, Inc