

# Xinger®

## Directional Couplers

20 dB

### Description

The 1H1304-20 is a low profile 20dB directional coupler in an easy to use surface mount package covering the AMPS and GSM bands. The 1H1304-20 is ideal for power and frequency detection as well as VSWR monitoring and can be used in most high power designs. Parts have been run through rigorous qualification testing and units are 100% tested. They are manufactured using materials with x and y thermal expansion coefficients compatible with common substrates.



### Features


- 800 - 1000 MHz
- Low Loss
- High Directivity
- Surface Mountable
- Tape And Reel
- Convenient Package
- 100% Tested

### Electrical Specifications

|        | Frequency<br>MHz            | Mean Coupling<br>dB   | Insert. Loss<br>dB Max           | VSWR<br>Max : 1       |
|--------|-----------------------------|-----------------------|----------------------------------|-----------------------|
| Narrow | 869 - 894                   | $20.0 \pm 1.5$        | 0.25                             | 1.15                  |
| Broad  | 800 - 1000                  |                       |                                  | 1.20                  |
|        | Freq. Sensitivity<br>dB Max | Directivity<br>dB Min | $\Theta_{JC}$<br>(°C/diss. Watt) | Power<br>Watts Ave/CW |
| Narrow | $\pm 0.10$                  | 20                    | 9.4                              | 150                   |
| Broad  | $\pm 0.30$                  |                       |                                  |                       |

Specifications subject to change without notice.

### Outline Drawing

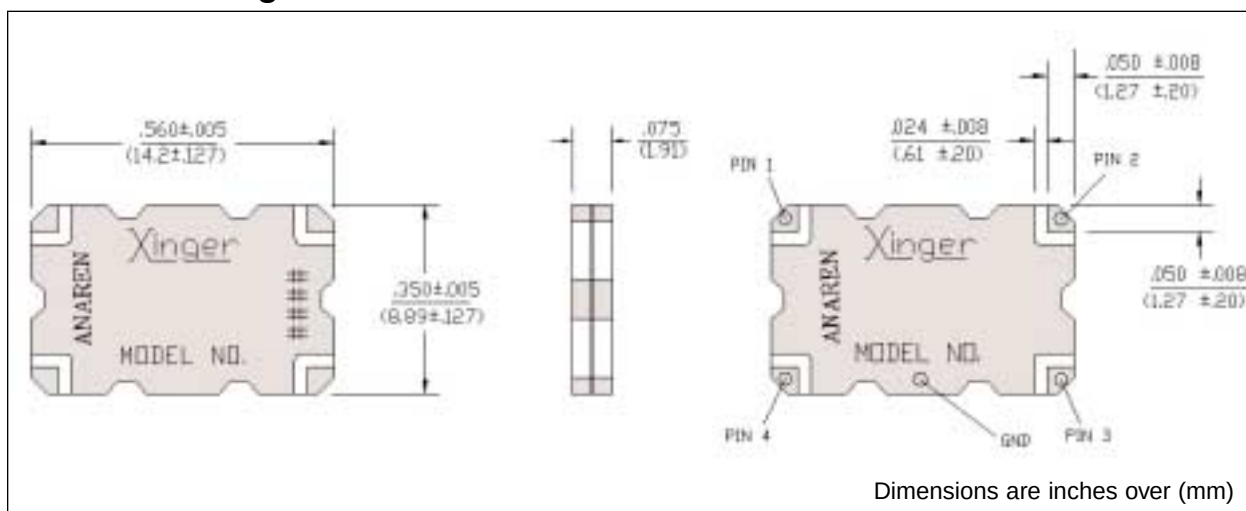

Available on Tape and Reel for Pick and Place Manufacturing.


Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121  
 Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369

# Model 1H1304-20


Anaren

Xinger®

## Typical Performance

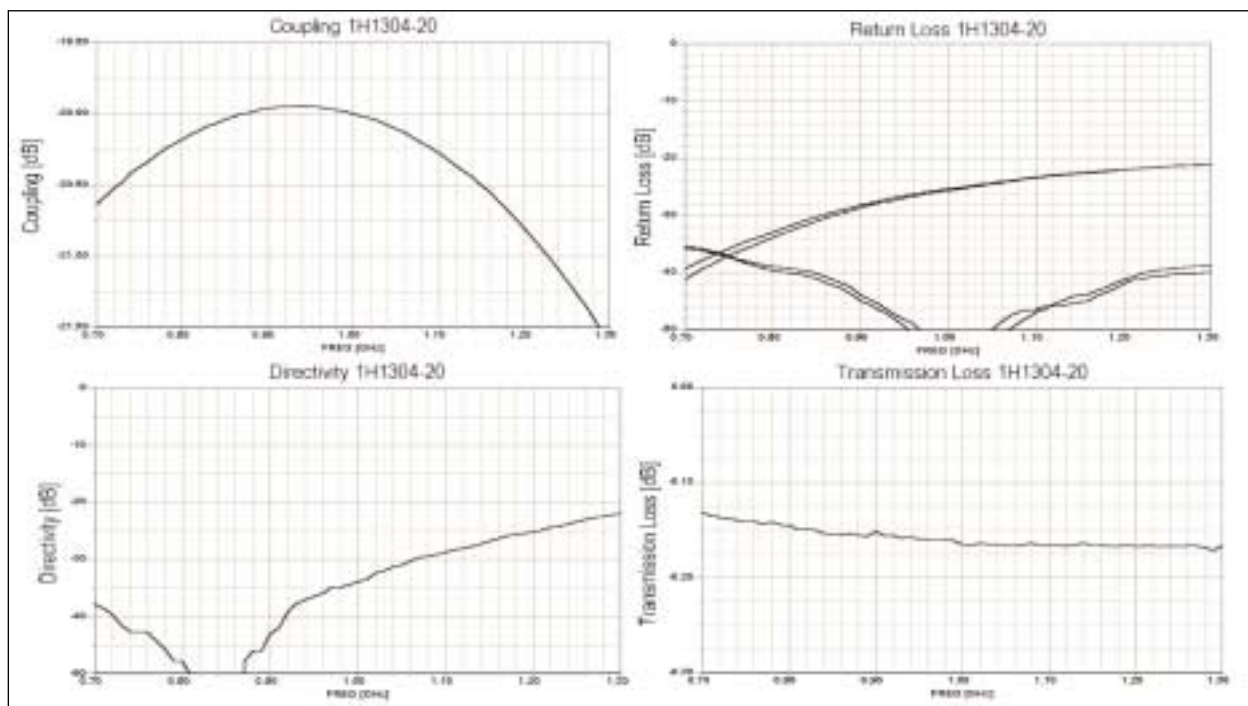


## Pin Configuration

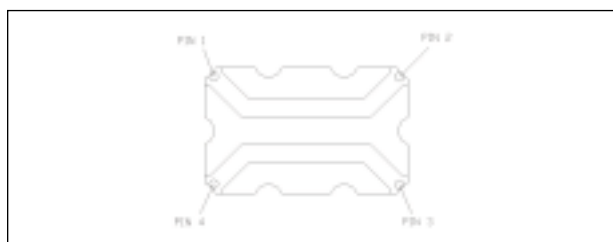

|    | Pin 1    | Pin 2    | Pin 3    | Pin 4    |
|----|----------|----------|----------|----------|
| #1 | Input    | Output   | Isolated | Coupled  |
| #2 | Output   | Input    | Coupled  | Isolated |
| #3 | Isolated | Coupled  | Input    | Output   |
| #4 | Coupled  | Isolated | Output   | Input    |

visit [www.anaren.com](http://www.anaren.com)

## Mounting Footprint

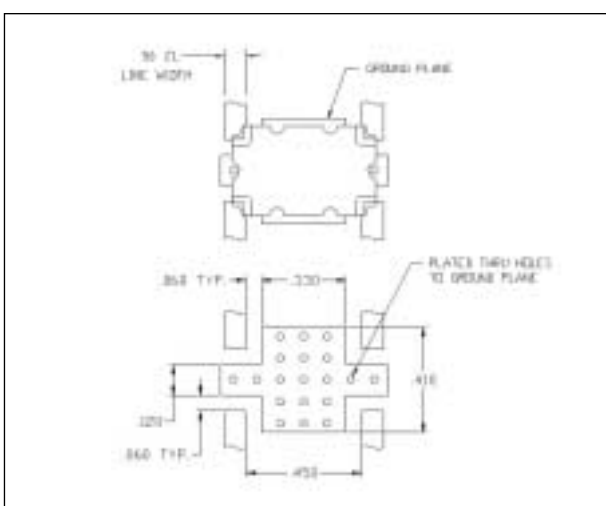

Available on Tape and Reel for Pick and Place Manufacturing.



Anaren

What'll we think of next?™

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121  
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369