

MFLP-00015CSP1

Passive GaAs MMIC 18.2 GHz Lowpass Filter

DEVICE OVERVIEW

General Description

The MFLP-00015CSP1 MMIC surface mount lowpass filter is an ideal solution for extremely small form factor, high rejection filtering. The MFLP-00015CSP1 features a 18.2 GHz 3 dBc cutoff and 29 dB passband return loss. Passive GaAs MMIC technology allows production of smaller filter constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances allow for less unit-to-unit variation than traditional filter technologies. The MFLP-00015CSP1 is available as a 1.5x1.5 mm CSP. Low unit to unit variation allows for accurate simulations using the provided S2P file.



[Download s-parameters here](#)

Features

- Low Passband Insertion Loss with Fast Roll-off
- 29 dB Return Loss
- High Stop Band Suppression
- This product embodies Marki Microwave's U.S. Pat. 11,869,858.

Applications

- SATCOM
- Radar

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MFLP-00015CSP1	Passive GaAs MMIC 18.2 GHz Lowpass Filter	CSP1	RoHS REACH	Released	EAR99
<u>EVB-MFLP-00015</u>	Evaluation Board, Passive GaAs MMIC 18.2GHz Lowpass Filter	EVB	RoHS REACH	Released	EAR99

Table Of Contents

■ Device Overview

General Description
Features
Applications
Functional Block Diagram

■ Port Configuration and Functions

Port Diagram
Port Functions

■ Revision History

■ Specifications

Absolute Maximum Ratings
Package Information
Electrical Specifications
Typical Performance Plot

■ Mechanical Data

Outline Drawing

■ Footprint Image

■ Evaluation Board

Evaluation Board Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2025-06-04	Initial Release



Port Configuration and Functions

Port Diagram

A top-down x-ray view of the MFLP-00015CSP1 package outline drawing is shown below.

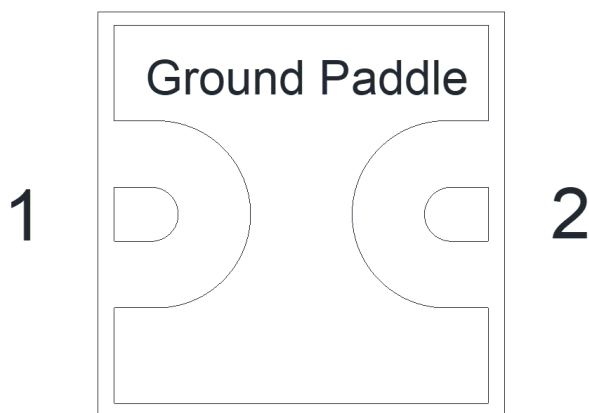

Port Functions

Port	Function	Description	Equivalent Circuit for Package
Ground Paddle	Ground	CSP package ground path is provided through the ground paddle and should be connected to RF ground.	
Pin 1	Input	Pin 1 is DC short to Pin 2.	
Pin 2	Output	Pin 2 is DC short to Pin 1.	

MFLP-00015CSP1

Passive GaAs MMIC 18.2 GHz Lowpass Filter

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	1.50 x 1.50 mm
Moisture Sensitivity Level	-	MSL 3






Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
1 dBc Passband	Configuration A, Temp = 25°C	-	16	-	-	-	GHz
3 dBc Passband	Configuration A, Temp = 25°C	-	18.2	-	-	-	GHz
30 dBc Rejection Point	Configuration A, Temp = 25°C	-	20.87	-	-	-	GHz
Passband Return Loss	Configuration A, Temp = 25°C	-	-	-	29	-	dB
Group Delay	Configuration A, Temp = 25°C	-	-	-	57	-	ps
Impedance	Configuration A, Temp = 25°C	-	-	-	50	-	Ω

Typical performance is de-embedded from evaluation board using automatic fixture removal (AFR).

Typical Performance Plot

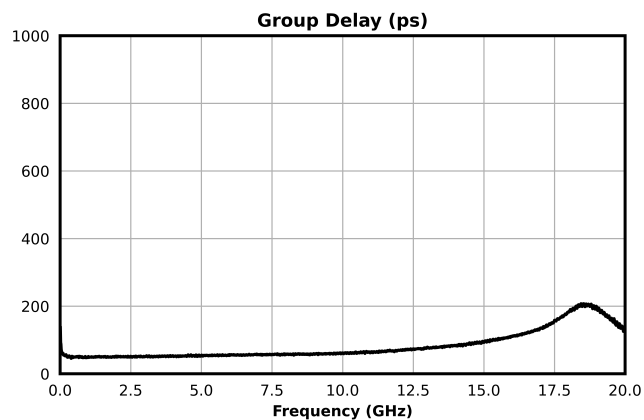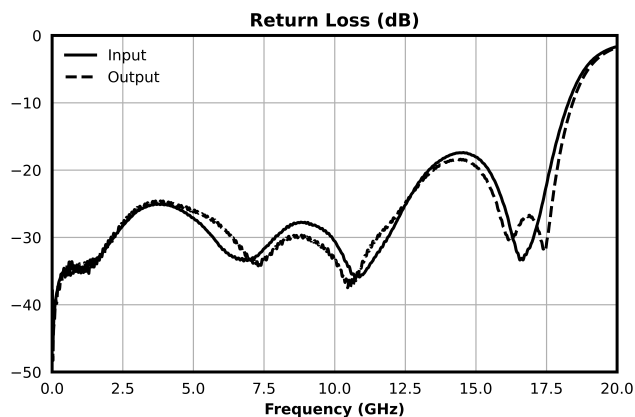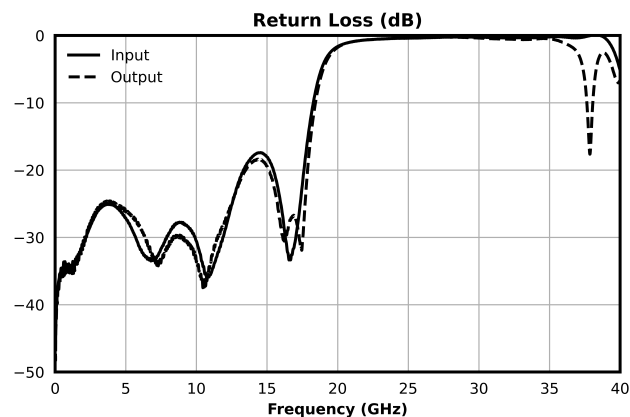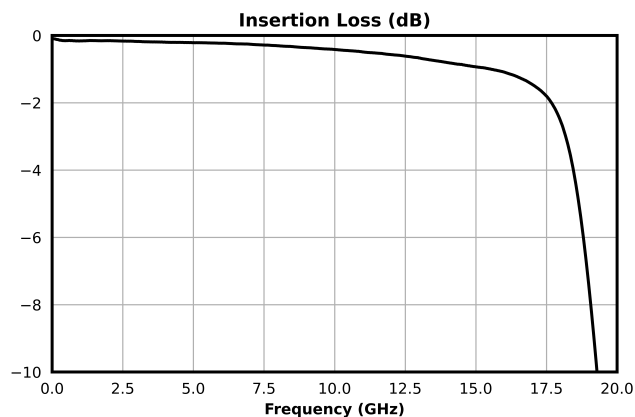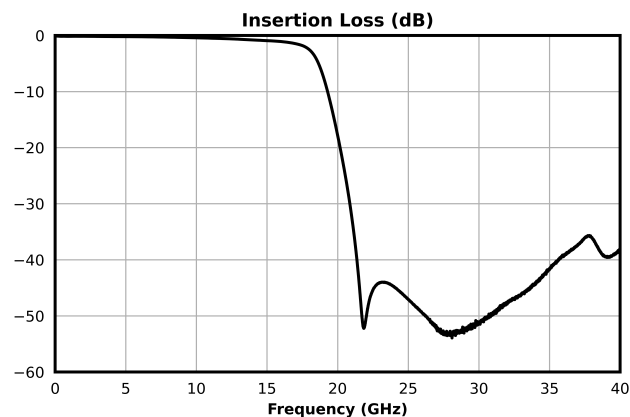


MFLP-00015CSP1

Passive GaAs MMIC 18.2 GHz Lowpass Filter

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

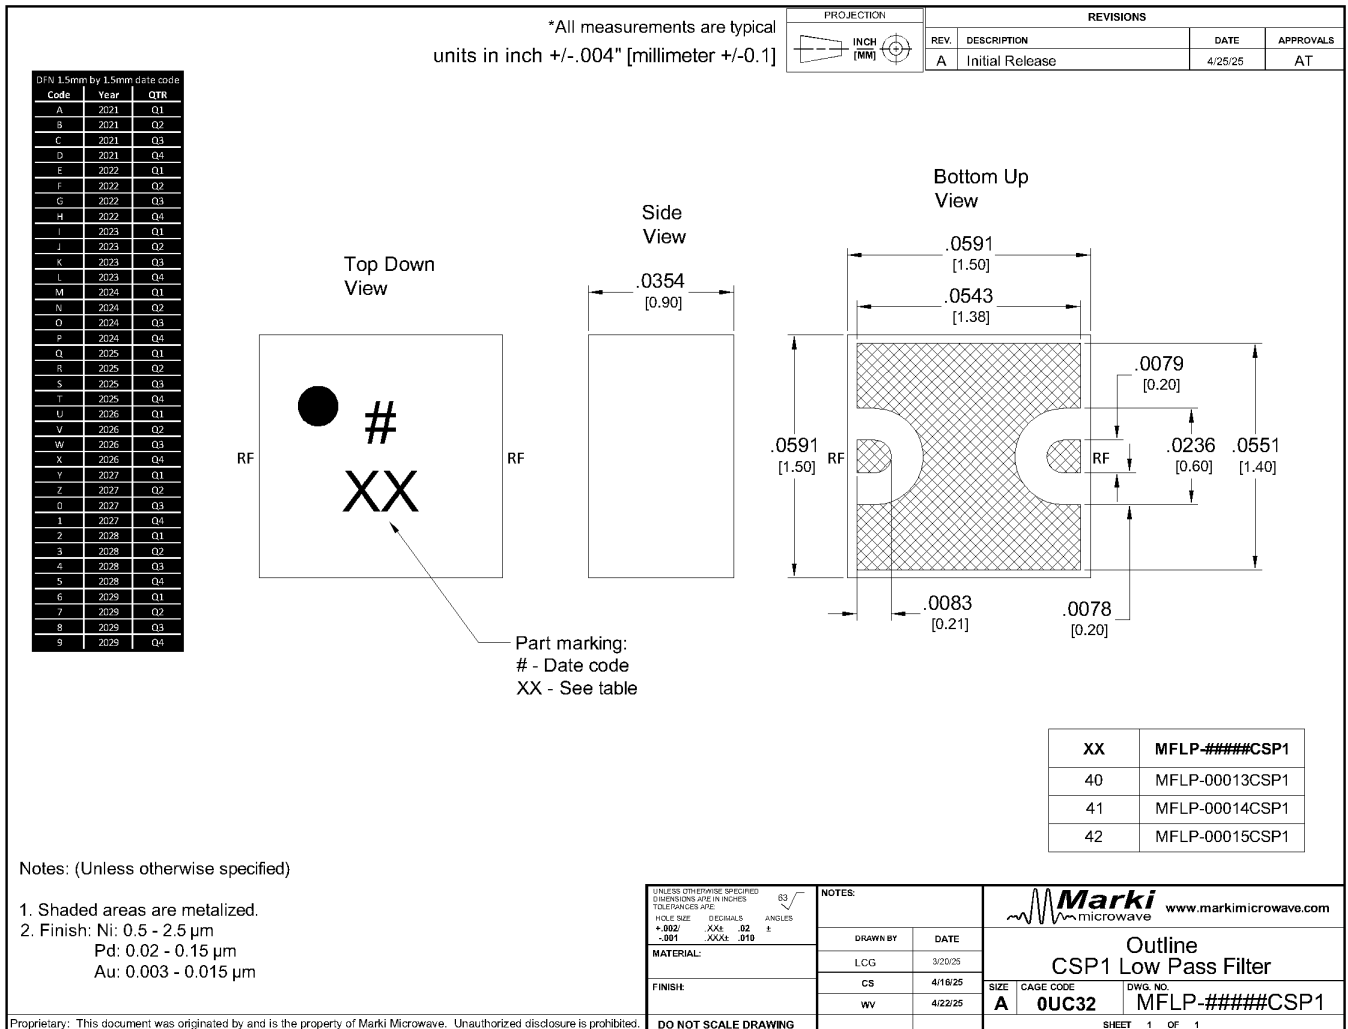


MFLP-00015CSP1

Passive GaAs MMIC 18.2 GHz Lowpass Filter

Footprint Image


Download : [Footprint Drawing](#)

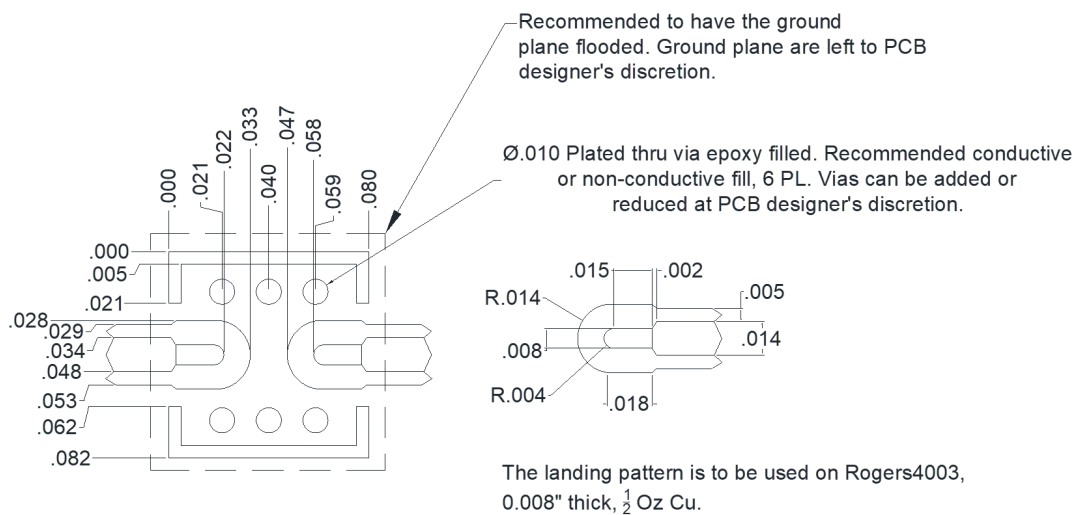

MFLP-00015CSP1

Passive GaAs MMIC 18.2 GHz Lowpass Filter

Evaluation Board - Outline Drawing

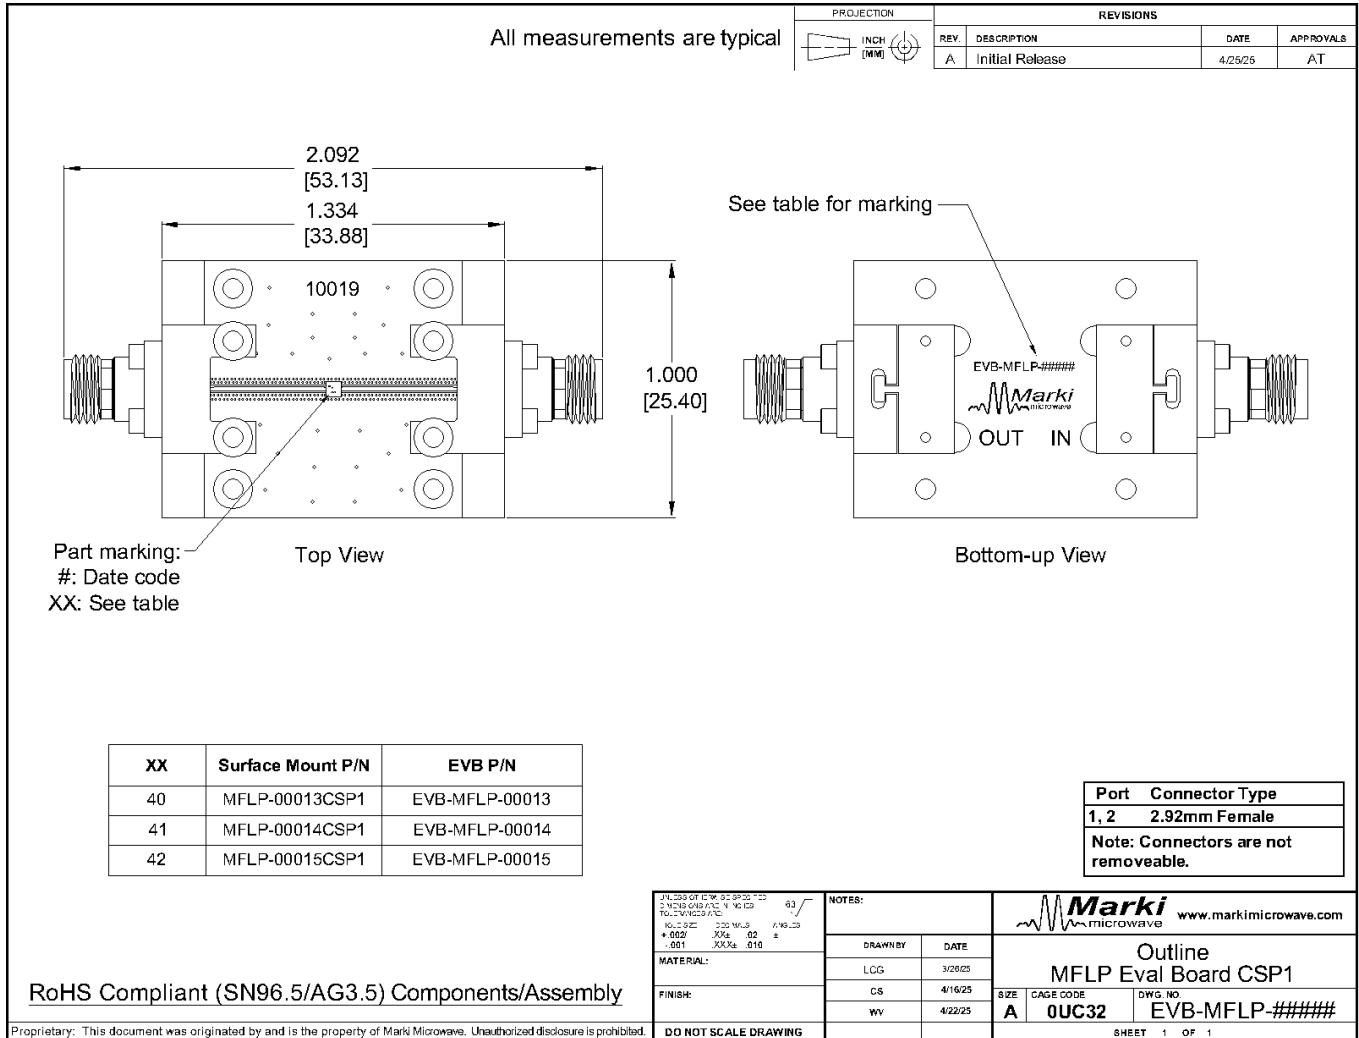

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2025, Marki Microwave, Inc